



Continuous light element, clear, 12-230 V AC/DC, 70 mm diameter, base BA 15d without light element

|                                             |                                              |       |             |
|---------------------------------------------|----------------------------------------------|-------|-------------|
| product brand name                          | SIRIUS                                       |       |             |
| product designation                         | Continuous light element                     |       |             |
| design of the product                       | without light source                         |       |             |
| General technical data                      |                                              |       |             |
| type of voltage of the operating voltage    | AC/DC                                        |       |             |
| operating voltage                           | 12 ... 230 V<br>12 ... 230 V<br>12 ... 230 V |       |             |
| • at DC rated value                         |                                              |       |             |
| • at AC at 50 Hz rated value                |                                              |       |             |
| • at AC at 60 Hz rated value                | 12 ... 230 V                                 |       |             |
| reference code according to EN 61346-2      | P                                            |       |             |
| Lamp                                        |                                              |       |             |
| product component light source              | No                                           |       |             |
| type of light source                        | filament lamp / LED                          |       |             |
| design of the optical signal                | continuous light                             |       |             |
| light intensity                             | 1.31 cd                                      |       |             |
| light intensity                             | 1.01 ... 1.78 cd                             |       |             |
| socket design                               | BA 15d                                       |       |             |
| Enclosure                                   |                                              |       |             |
| height                                      | 65.5 mm                                      |       |             |
| width                                       | 70 mm                                        |       |             |
| outer diameter of the signal column element | 70 mm                                        |       |             |
| material                                    | PC                                           |       |             |
| color                                       | clear                                        |       |             |
| fastening method                            | Bayonet                                      |       |             |
| protection class IP                         | IP65                                         |       |             |
| Ambient conditions                          |                                              |       |             |
| ambient temperature during operation        | -20 ... +60 °C                               |       |             |
| Approvals Certificates                      |                                              |       |             |
| General Product Approval                    |                                              | other | Environment |



[Confirmation](#)

[Environmental Confirmations](#)

### Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
 Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
 Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4400-1AE>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4400-1AE>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4400-1AE>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4400-1AE&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4400-1AE&lang=en)

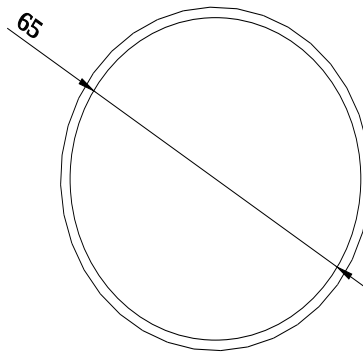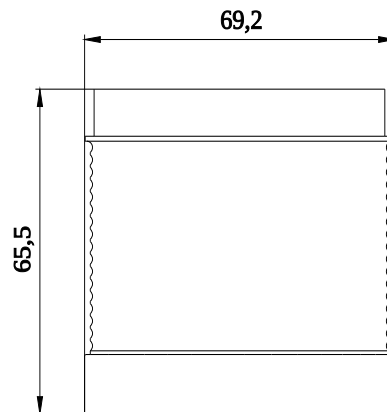

**-P**

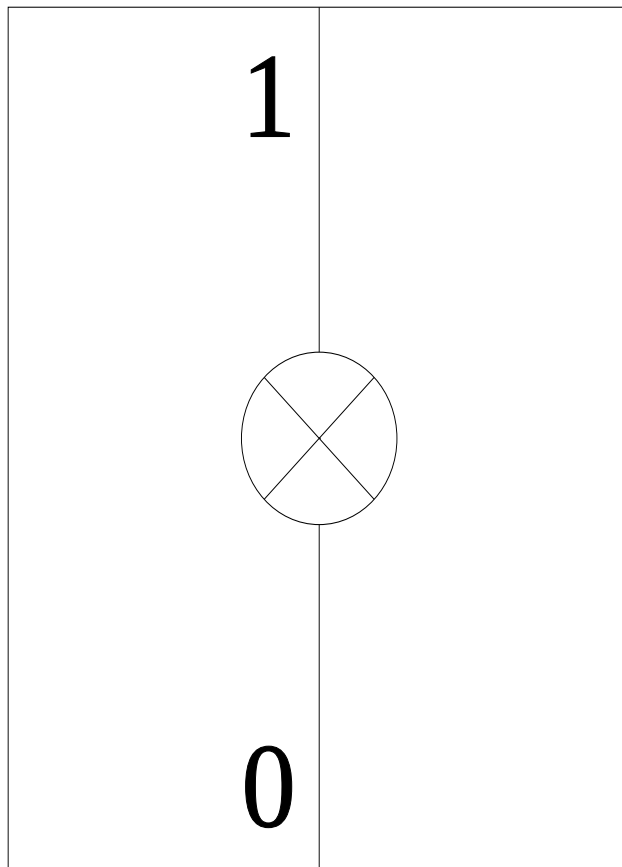

last modified:

2/25/2021 