



Figure similar

AS-i SlimLine module Phased-out product !!! For further information, please contact our sales department S22.5 digital 2DI/2RQ, IP20 2 x input for 3-wire sensor 2 x 1 output, Relay Screw terminals Overall width 22.5 mm

General technical data		
design of the product		SlimLine S22.5 - I/O modules for operation in the control cabinet, IP20
design of the slave type		standard slave
Type		2 inputs / 2 outputs
I/O configuration		3
ID/ID2 code		0/F
protocol is supported AS-Interface protocol		Yes
AS interface total current input max	mA	50
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Addressing		front addressing socket
type of electrical connection of the inputs and outputs		screw-type terminals
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		K
Sensor supply		
type of voltage supply for sensor supply		using AS-Interface
input voltage	V	20 ... 30
property of the sensor supply short-circuit and overload resistant		Yes
Inputs		
number of digital inputs		2
type of connection technology		2-wire technology
Input circuit		PNP transistor
type of voltage of the input voltages		DC
Inputs switching level High min	V	10
input current at digital input		
• for signal <1> minimum	mA	5
• with signal <0> maximum	mA	1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant
Outputs		
number of digital outputs		2
Outputs		
• current carrying capacity Ith	A	6
ampacity		
• of the output relay		
— at DC-13		
— at 24 V	A	1
— at 110 V	A	0.2
— at 230 V	A	0.1

— at AC-15 at 230 V at 50/60 Hz	A	3
type of switching output		relay, changeover floating
property of the output short-circuit proof		No
output Polarity reversal protection		does not apply
Outputs • short-circuit protection • induction protection • watchdog		external back-up fuse required: 6 A gL/gG does not apply built-in
Status display • display of I/Os • AS-Interface • FAULT		yellow LED green LED red LED
Assignment of data bits • D0 • D1 • D2 • D3		IN1 IN2 OUT1 OUT2

Ambient conditions

ambient temperature • during operation • during storage	°C	-25 ... +70
	°C	-40 ... +85
protection class IP		IP20

Mechanical data

width	mm	22.5
height	mm	102
depth	mm	86
fastening method		35 mm standard rail mounting or wall mounting using push-in lugs
Conductor cross-section • solid • finely stranded — with end sleeve • AWG solid or stranded		1 x (0.5 - 4) or 2 x (0.5 - 2.5) 1 x (0.5 - 2.5) mm² or 2 x (0.5 - 1.5) mm² AWG 2 x (20 - 14) mm²

Certificates/ approvals

General Product Approval	EMV
---------------------------------	-----



[KC](#)

Marine / Shipping	other	Environment	Industrial Communication
--------------------------	--------------	--------------------	---------------------------------



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1402-0BE00-0AA2>

Cax online generator



<http://support.automation.siemens.com/VW/CAXorder/default.aspx?lang=en&mlfb=3RK1402-0BE00-0AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1402-0BE00-0AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1402-0BE00-0AA2&lang=en

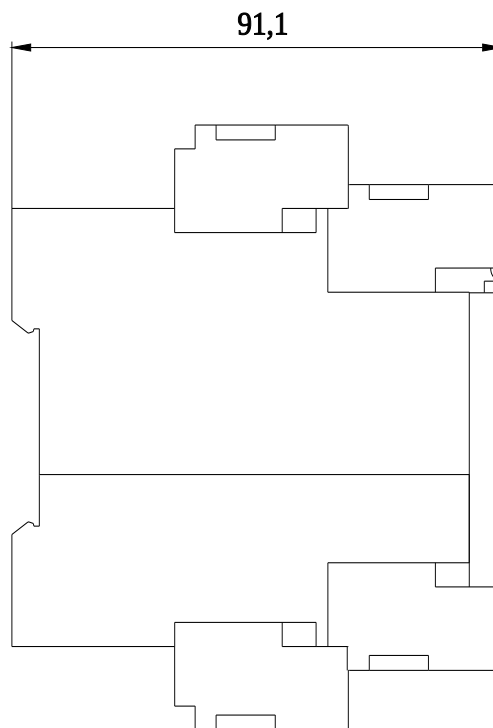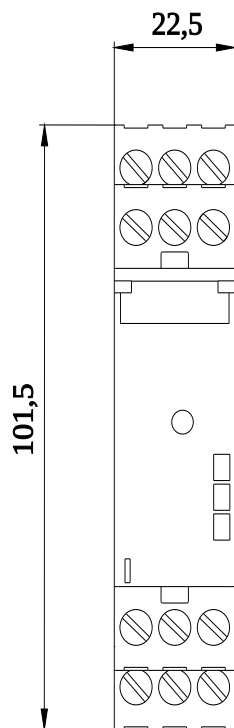

last modified:

3/11/2024 