


Bostrig Type P Control Oil & Marine Rig Cable

TEXCAN
A Sonepar Company

BOSTRIG TYPE P CONTROL CABLE
600V or 1kV | MULTICONDUCTOR, 10 AWG

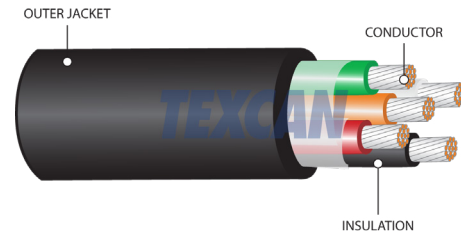

SPECIFICATIONS

- IEEE 1580 and IEEE 45- Marine Shipboard Cable
- UL 1309- Marine Shipboard Cable Type X110
- CSA 22.2 No. 245- Marine Shipboard Cable Type X110
- CSA 22.2 No. 239- Type CIC
- CSA 22.2 No. 230 as Type TC-ER
- Det Norske Veritas (DNV)
- American Bureau of Shipping (ABS)
- Transport Canada Approved AMS400-20-2
- Transport Canada 8700-20-2
- Lloyd's Register of Shipping (LRS)
- United States Coast Guard-46CFR



CONSTRUCTION

Conductor: Soft annealed stranded tinned copper per ASTM B 33.
A polyester tape separator is used over the conductor.

Insulation: Bostrig Type P chemically cross-linked polyolefin (XLPO), meeting IEEE 1580.

Jacket: Flame-Retardant Thermosetting CPE (Chlorinated Polyethylene).

Options: Available in an unarmoured or armoured and sheathed version.
Arctic Neoprene (Type N) jacket also available.



Multi-Conductor, Unarmoured

10 AWG - BOSTRIG™ TYPE P CONTROL RIG CABLE 600V OR 600/1000V										
Part Number	Draka Number	Number of Conductors	Insulation Thickness		Sheath Thickness		Cable Diameter		Cable Weight	
			in	mm	in	mm	in	mm	Lbs/Mft	Kg/Km
16-C10PN-2	026241	2	0.030	0.76	0.060	1.5	0.490	12.4	150	225
16-C10PN-3	026242	3	0.030	0.76	0.060	1.5	0.510	13.0	200	300
16-C10PN-4	026243	4	0.030	0.76	0.060	1.5	0.560	14.2	250	370
16-C10PN-5	026244	5	0.030	0.76	0.060	1.5	0.620	15.7	300	445
16-C10PN-6	026245	6	0.030	0.76	0.060	1.5	0.680	17.3	350	520
16-C10PN-7	026246	7	0.030	0.76	0.060	1.5	0.680	17.3	390	580
16-C10PN-8	026247	8	0.030	0.76	0.060	1.5	0.730	18.5	445	660
16-C10PN-10	026248	10	0.030	0.76	0.080	2.0	0.900	22.9	600	895

This information is provided for reference only. Please consult the factory or your representative to confirm all engineering information. This information is not intended to replace the information in the appropriate and applicable standard or code. This product may be manufactured in an unarmored or armored and sheathed version.