


Bostrig Type P Control Oil & Marine Rig Cable

TEXCAN
A Sonepar Company

BOSTRIG TYPE P CONTROL CABLE
600V or 1kV | MULTICONDUCTOR, 14 AWG

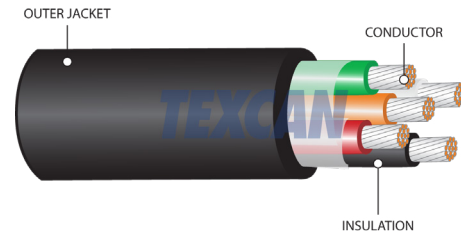

SPECIFICATIONS

- IEEE 1580 and IEEE 45- Marine Shipboard Cable
- UL 1309- Marine Shipboard Cable Type X110
- CSA 22.2 No. 245- Marine Shipboard Cable Type X110
- CSA 22.2 No. 239- Type CIC
- CSA 22.2 No. 230 as Type TC-ER
- Det Norske Veritas (DNV)
- American Bureau of Shipping (ABS)
- Transport Canada Approved AMS400-20-2
- Transport Canada 8700-20-2
- Lloyd's Register of Shipping (LRS)
- United States Coast Guard-46CFR



CONSTRUCTION

Conductor: Soft annealed stranded tinned copper per ASTM B 33.
A polyester tape separator is used over the conductor.

Insulation: Bostrig Type P chemically cross-linked polyolefin (XLPO), meeting IEEE 1580.

Jacket: Flame-Retardant Thermosetting CPE (Chlorinated Polyethylene).

Options: Available in an unarmoured or armoured and sheathed version.
Arctic Neoprene (Type N) jacket also available.



Multi-Conductor, Unarmoured

14 AWG - BOSTRIG™ TYPE P CONTROL RIG CABLE 600V OR 600/1000V										
Part Number	Draka Number	Number of Conductors	Insulation Thickness		Sheath Thickness		Cable Diameter		Cable Weight	
			in	mm	in	mm	in	mm	Lbs/Mft	Kg/Km
16-C14PN-2	T26207	2	0.030	0.76	0.060	1.5	0.390	9.9	85	125
16-C14PN-3	T26208	3	0.030	0.76	0.060	1.5	0.410	10.4	105	155
16-C14PN-4	T26209	4	0.030	0.76	0.060	1.5	0.450	11.4	130	195
16-C14PN-5	T26210	5	0.030	0.76	0.060	1.5	0.490	12.4	160	240
16-C14PN-6	T26211	6	0.030	0.76	0.060	1.5	0.530	13.5	185	275
16-C14PN-7	T26212	7	0.030	0.76	0.060	1.5	0.530	13.5	200	300
16-C14PN-8	T26213	8	0.030	0.76	0.060	1.5	0.570	14.5	230	340
16-C14PN-10	T26214	10	0.030	0.76	0.060	1.5	0.660	16.8	285	425
16-C14PN-12	T26215	12	0.030	0.76	0.060	1.5	0.680	17.3	325	485
16-C14PN-16	T26216	16	0.030	0.76	0.060	1.5	0.750	19.1	415	620
16-C14PN-20	T26217	20	0.030	0.76	0.080	2.0	0.880	22.4	550	820
16-C14PN-24	T26218	24	0.030	0.76	0.080	2.0	0.960	24.4	645	960
16-C14PN-30	T26219	30	0.030	0.76	0.080	2.0	1.020	25.9	775	1,155
16-C14PN-37	T26220	37	0.030	0.76	0.080	2.0	1.100	27.9	930	1,385
16-C14PN-44	T26221	44	0.030	0.76	0.080	2.0	1.240	31.5	1,105	1,645
16-C14PN-60	T26222	60	0.030	0.76	0.080	2.0	1.370	34.8	1,455	2,165
16-C14PN-91	T26223	91	0.030	0.76	0.080	2.0	1.650	41.9	2,145	3,190

This information is provided for reference only. Please consult the factory or your representative to confirm all engineering information. This information is not intended to replace the information in the appropriate and applicable standard or code. This product may be manufactured in an unarmored or armored and sheathed version.

When others can't, TEXCAN
WIRE & CABLE SPECIALISTS SINCE 1978

Bostrig Type P Control Cable - 14 AWG | 8