

Date		Project	
Type		Part Number	





THE EVERYDAY COMPETITIVE OPTION

MAKO Series

Vapor Tight Fixture

Reno Lighting's ECO Vapor Tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP65 protection grade and is UL certified, making it a great lighting solution for your industrial application.

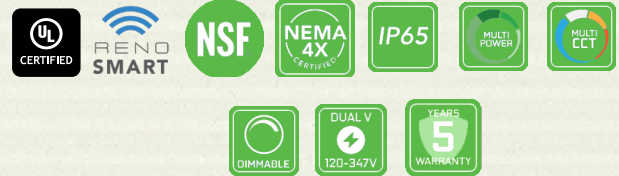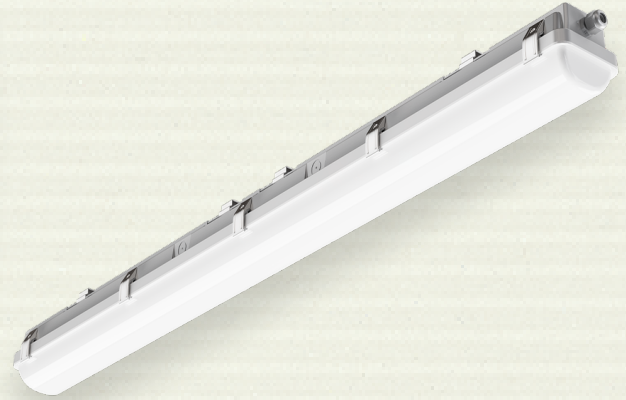

PRODUCT FEATURES

- NSF & NEMA 4X Compliant
- Wet rated IP65
- Sealed housing protects against moisture, dust, and corrosive environments, ideal for wet/damp location
- Surface, Wall & Suspended Mounting options via supplied clamps inside the fixture body
- One-piece polycarbonate housing and frosted polycarbonate lens
- Operating temperature: -40°F to +104°F (-40°C to +40°C)
- Rated Lifespan: L70 ~100,000 hrs
- 5 year warranty

KEY SPECIFICATIONS

Voltage	120-347V
Wattage	Selectable: 20/30/40W
Power Factor	>0.9
CCT	Selectable: 35/40/5000K
CRI	80
Lumens	Up to 5,536 lm
Default Fixture Setting	40W and 4000K
Beam Angle	120°
Dimming	0-10V
Mounting	Surface, Wall & Suspension
Applications	Commercial, Industrial, Warehouse



STANDALONE
SENSOR OPTIONS



EMERGENCY
BACKUP READY



RENO SMART
NLC SYSTEM




SPECIFICATIONS - 4FT 20/30/40W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT
R33119	RENO-LVP4-DV-MW-MCCT-ECO	20W	120-347V	2,778 lm	139 lm/W	3500K
				2,871 lm	143 lm/W	4000K
				2,817 lm	141 lm/W	5000K
		30W	120-347V	3,772 lm	125 lm/W	3500K
				3,891 lm	129 lm/W	4000K
				3,753 lm	125 lm/W	5000K
		40W	120-347V	5,284 lm	132 lm/W	3500K
				5,536 lm	138 lm/W	4000K
				5,310 lm	133 lm/W	5000K

DLC CERTIFICATION

Order#	Model	Application	DLC Standard	DLC Premium
R33119	RENO-LVP4-DV-MW-MCCT-ECO	Direct Linear Ambient Luminaires	PENDING	–
		Low-Bay Luminaires	PENDING	–


ACCESSORIES – MOUNTING



R39204
 RENO-RP
 Suspension Kit

Order#	Model	Description
R39204	RENO-RP	Suspension Kit

ACCESSORIES – EMERGENCY BACKUP

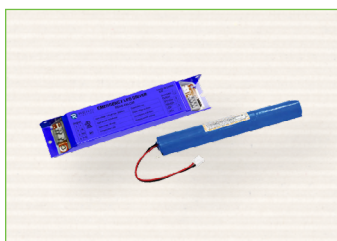

R83004
 RENO-EM-C08
 Emergency LED Driver (100-347V AC, 50-60Hz, 8W)

Order#	Model	Description
R83004	RENO-EM-C08	Internal Mount Emergency Driver (100-347V AC, 50-60Hz, 8W)