
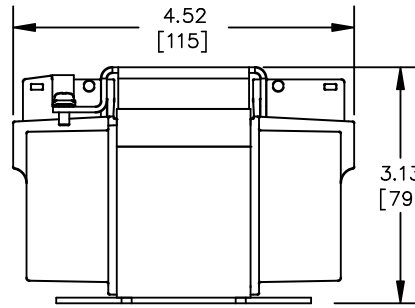




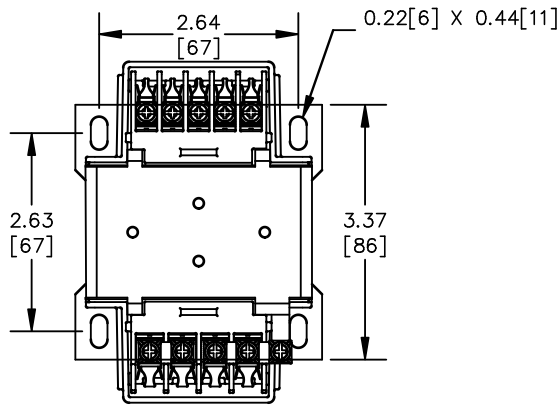

- FINGER GUARDS FOR TERMINAL BLOCKS AND FUSING OPTIONAL
- OPTIONAL FUSE BLOCK WILL ADD 1.3" [33mm] TO HEIGHT
- OPTIONAL FUSE BLOCK WITH FINGER GUARD WILL ADD 1.5" [38mm] TO HEIGHT
- TOLERANCES STD. +/- 0.1" [+/-3mm]
- ALL DIMENSIONS ARE IN INCHES [mm]

H1 0V	H2 240 230 220	H3 415 398 380	H4 480 460 440	H5 600 575 550	hps	EX X2	hps	CONTROL TRANSFORMER P/N C2M0075XI 75 VA TYPE PH	LISTED 252L E50394 P0012 TYPE PH	P/N C2M0075XI 75 VA 50/60 Hz 130°C CLASS	LV TERMINAL LOCATION 120 25 115 24 110 23 X3 X2	0V X1 GND
----------	-------------------------	-------------------------	-------------------------	-------------------------	-----	----------	-----	--	---	--	---	-----------------

NOTES:

hammond
POWER SOLUTIONS

TITLE: 1 PHASE MOLDED CONTROL TFX

1	25/09/16	RH	UPDATED EDB	DES: MSARAF
NO.	DATE	BY	REVISION	SCALE: NTS

SHEET 1 OF 1

EDBC2M0075XI

1.1 jwen 2025/09/22 10:19

THIS DRAWING CONTAINS STRICTLY CONFIDENTIAL INFORMATION BELONGING TO HAMMOND POWER SOLUTIONS AND MUST NOT BE DISTRIBUTED OUTSIDE AUTHORIZED PARTIES.