


TZ1RE024PGVABL12C-MF (Order no. 078159)

Technical data

Approvals

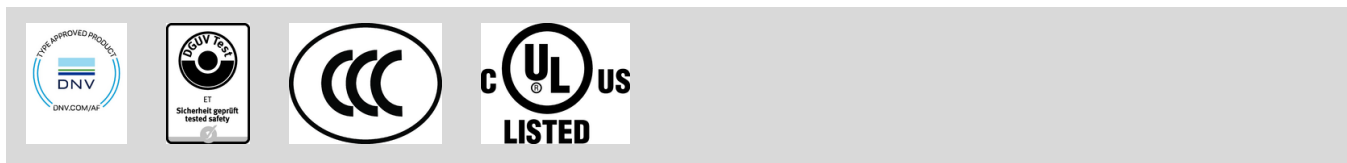

Operating and display elements

LED display

Operating voltage corresponds to the solenoid voltage
(2 LEDs; green, red)

Electrical connection values

Fuse	max. 4 A gG (>70 °C => 2 A gG)	
Power consumption	10 W	
Rated insulation voltage U_i	250 V	
Rated impulse voltage U_{imp}	1.5 kV	
Utilization category		
	AC-15	4 A 250 V (>70 °C => 2 A)
	DC-13	4 A 24 V (>70 °C => 2 A)
Solenoid operating voltage		
	AC/DC	24 V -15% ... +10%
Solenoid duty cycle	100 %	
Switching voltage		
	min. at 10 mA	12 V
Switching current		
	min. at 24 V	1 mA
thermal rated current I_{th}	4 A (>70 °C => 2 A)	

Mechanical values and environment

Anfahrsgeschwindigkeit	max. 20 m/min
------------------------	---------------

Approach direction

Actuating head on the right A

Connection type		
	1 x	Plug connector BHA12 (11-pin + PE)
Number of guard lock monitoring NO contacts	1	
Number of door position positively driven contacts	3	
Number of guard lock monitoring positively driven contacts	1	
Extraction force	30 N	
Actuation frequency	max. 1200 1/h	
Actuating force	35 N	
Lid	black	
Installation orientation	any	
Insertion depth	52 mm	
Storage temperature	-25 ... 80 °C	
Mechanical life	1 x 10 ⁶	
Retention force	10 N	
Switching principle	Slow-action switching contact	
Degree of protection	IP65	
Ambient temperature	-25 ... 80 °C	
Material		
	Contact	Silver alloy, gold flashed
	Housing	Anodized die-cast alloy
Locking force $F_{\max}$	2000 N	
Locking force F_{Zh}	1500 N	
Guard locking principle	Closed-circuit current principle	

Characteristic values according to EN ISO 13849-1 and EN IEC 62061

	B10 _D	Mission time
Monitoring of the guard position	3x10 ⁶	20 y