


## **MGB-L1HEB-PNA-R-136429 (Order no. 136429)**

### **Locking set MGB-L1...-PN (guard locking by spring force) with 5 control elements, 7/8" and M12 plugs**

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 3 illuminated pushbuttons
- ▶ SSG10 key-operated rotary switch
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ With escape release
- ▶ Unicode

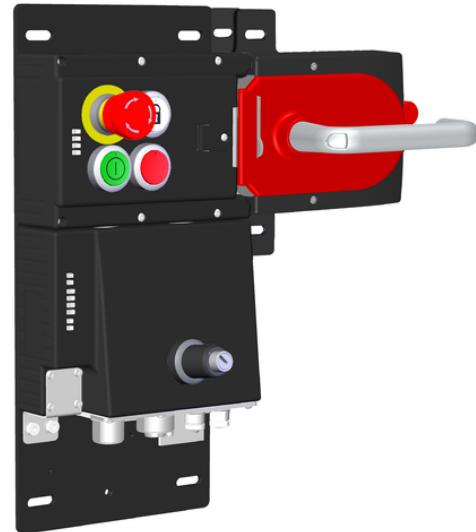

### **Profinet connection**

7/8" plugs according to ANSI/B93.55M-1981 and M12 plugs (d-coded) according to IEC 61076-2-101

### **Profinet RT switch**

Point-to-point topology network structure due to integrated RT switch.

### **Flexible use as interlocking or guard locking**

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

### **Escape release**

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.