


RADIUSBETAETIGER-X-OU-N (Order no. 097906)

Hinged actuator, top/bottom, for safety switch NX/TX

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator

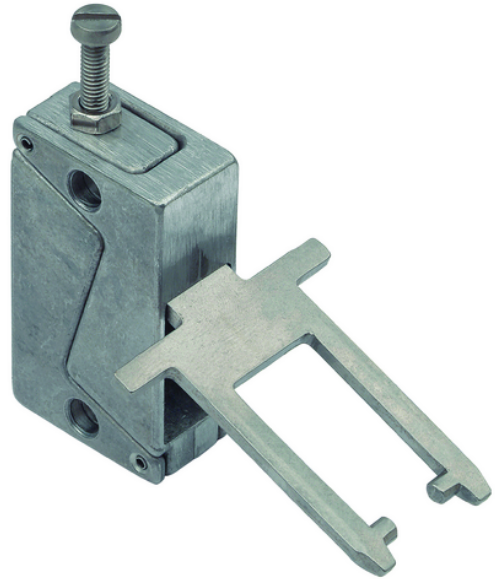





Hinged actuators

For door radii less than 300 mm a hinged actuator should be used. The spring action movement of the actuator prevents damage due to the actuator jamming in the actuator head. Depending on the movement of the guard, the actuator must be selected for left/right or top/bottom.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

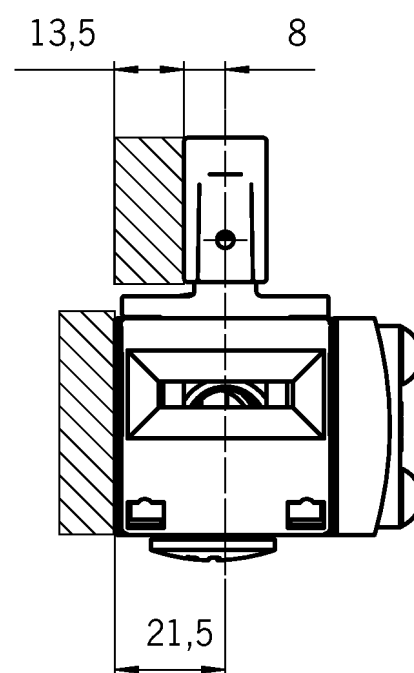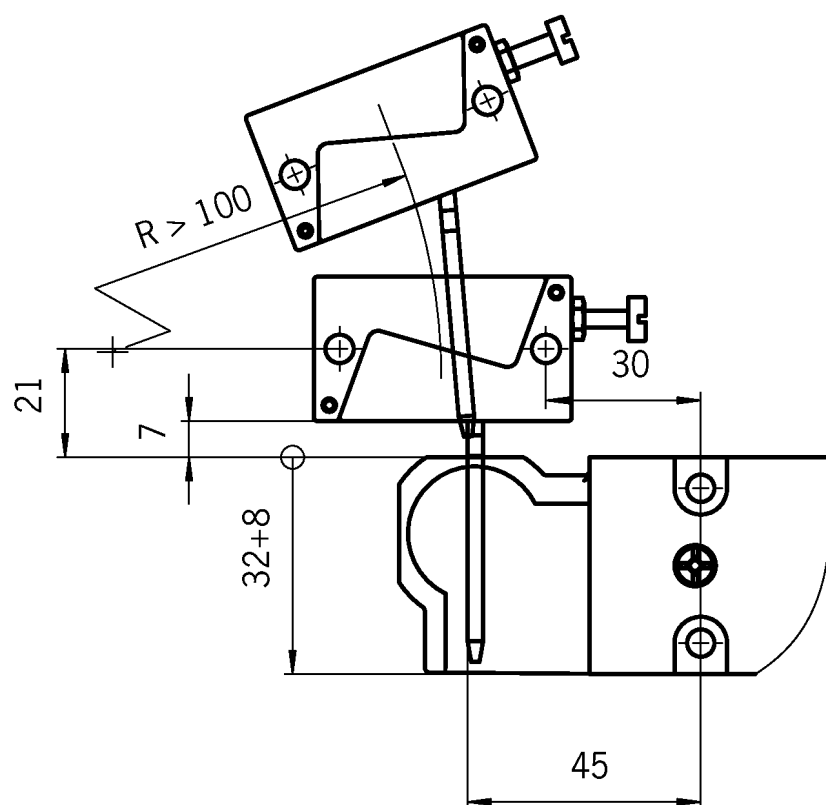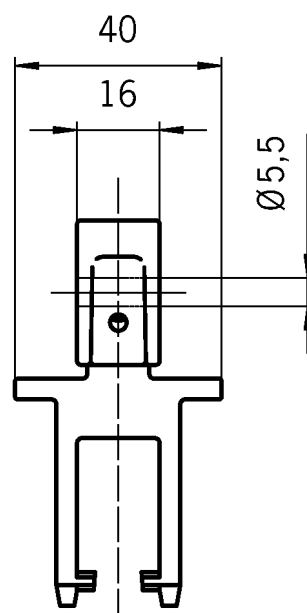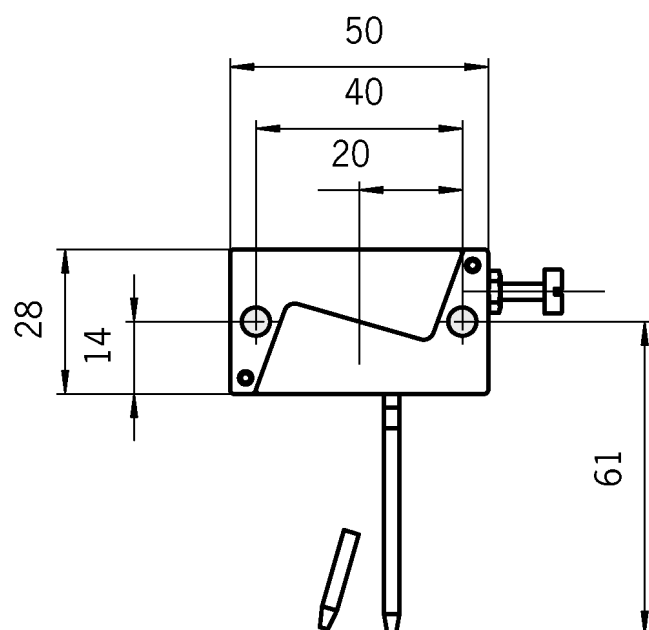

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C	
Overtravel	max. 7 mm	
Door radius	min. 100 mm	
Material		
	Screw	Stainless steel
	Actuator	Stainless steel

Miscellaneous

Usability of insertion funnel	No
-------------------------------	----