

NZ2HS-3131-9C-GMMF (Order no. 073508)

Safety switch NZ.HS, lever arm with steel roller, plug connector MR9

- ▶ Lever arm, steel roller \varnothing 18 mm
- ▶ Version A according to EN 50041
- ▶ Plug connector MR9, 8-pin + PE
- ▶ 2 pos. driven contact
- ▶ 2 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching direction adjustable

Right, left or both sides

Switching element

3131H Slow-action switching contact 2 positively driven contacts $\ominus \rightarrow$ + 2 NO contact

Dimensional drawings

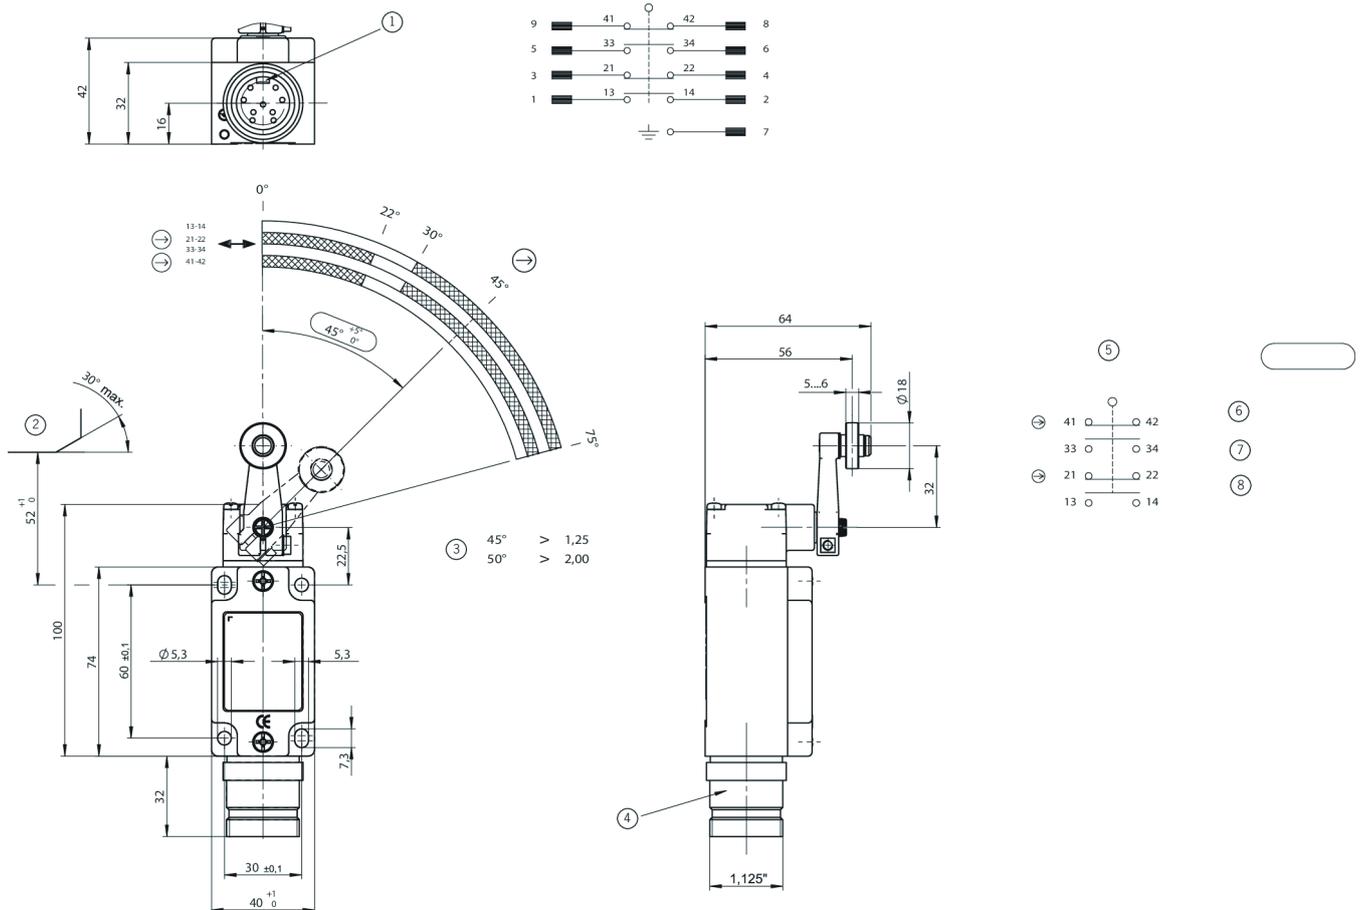

1 Guide lug not aligned

2 Dog

3 Contact opening gap

4 Plug connector MENCOM (9-pin) MIN-9MR-1-18-M20

5 Switching element in free position: Switching element SK 3131 H, 2 NC contacts + 2 NO contacts; NC contacts positively driven

6 Positive opening function is dependent on maintaining this distance.

7 Actuator (dog) must be positively mounted on the machine.

8 Switch can be replaced only with the same type.

Connection examples

