


GP1-538A-M (Order no. 090250)

Safety switch GP, cable entry M20 x 1.5

- ▶ 3 x cable entry M20 x 1.5
- ▶ 2 pos. driven contact



Approach direction



Horizontal and vertical
Can be adjusted in 90° steps


Switching element

538 Slow-action switching contact 2 positively driven contacts ➞

Accessories required

Actuator is not included.

Dimensional drawings

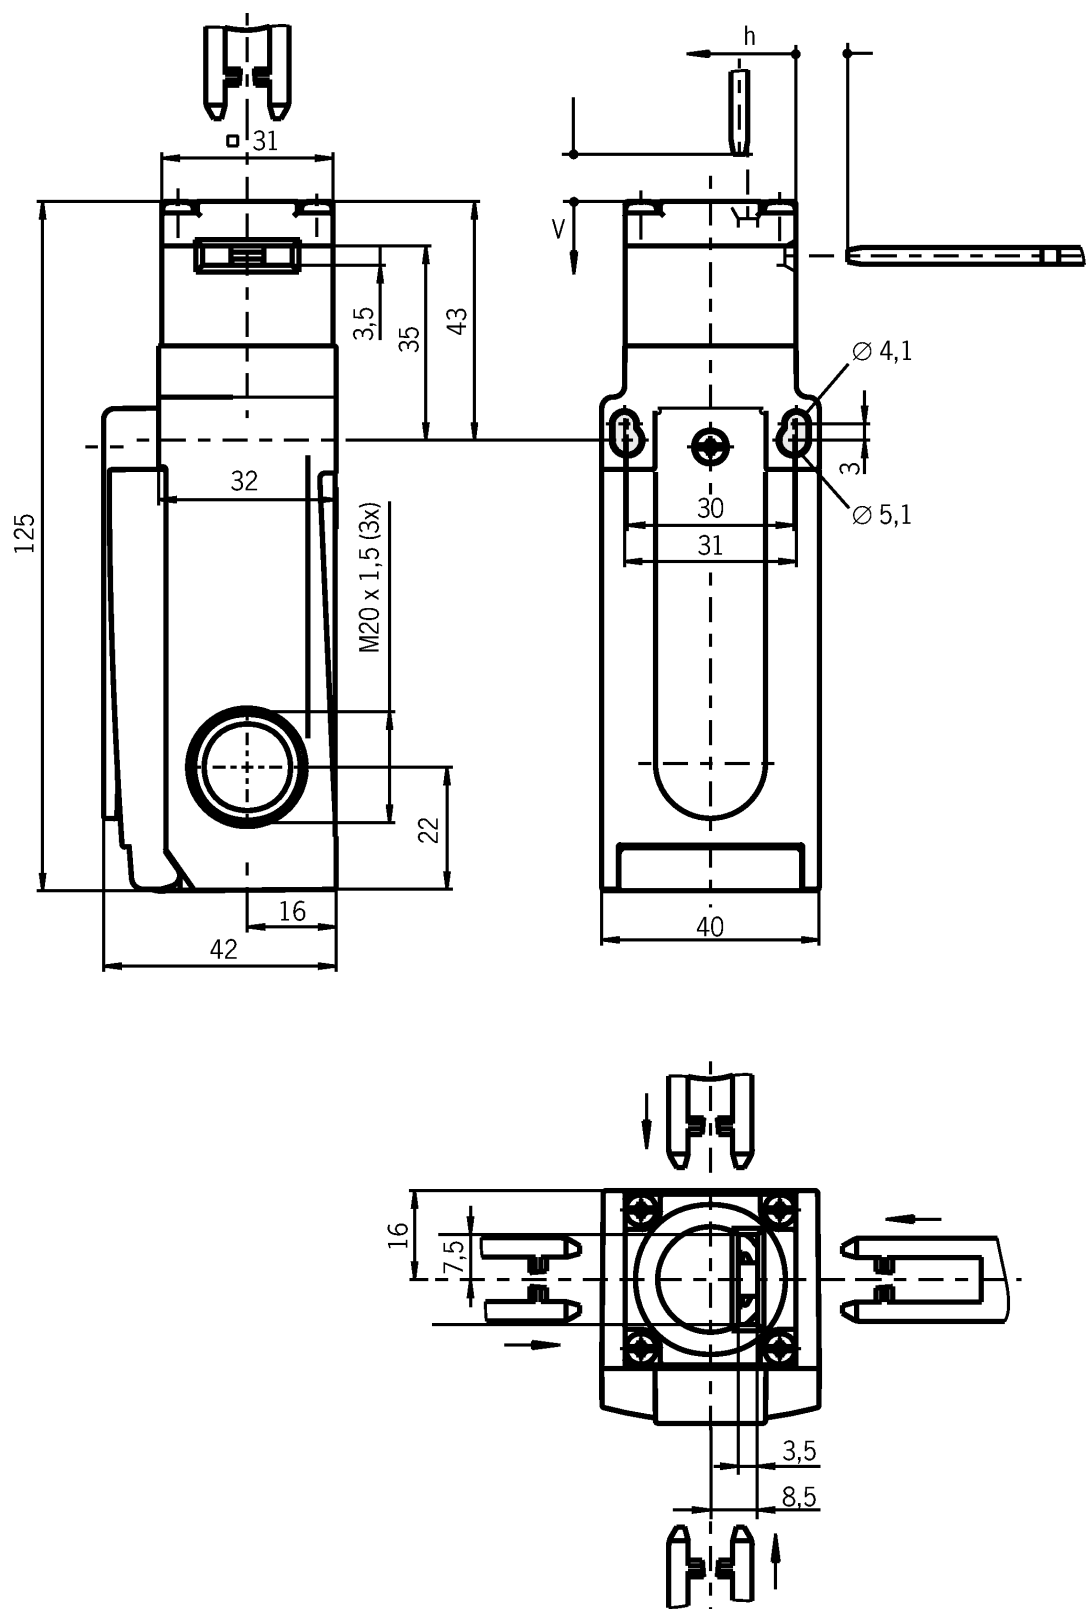

Connection examples

