

ZSM4201–102059 (Order no. 102059)

ZSM, pushbuttons, LED, vibration motor, stop command device

- ▶ 3-stage function
- ▶ Stop command device
- ▶ Vibration signal
- ▶ LED indicator
- ▶ Pushbuttons
- ▶ Straight connecting cable, 5 m



3-stage function

Enabling function is active only in the second stage (center position, actuating point). If the pushbutton is released or pushed further (panic function), the enabling is removed (dependent on the wiring, see function sequence).

Stop command device

Machine stop (gray/yellow, with pull-to-reset and turn-to-reset) on the switch housing, for different wiring concepts.

Upper position for rapid access in an emergency

Vibration signal

The vibration signal is used for tactile feedback of the enabling position.

LED indicator

The LED indicator is used for visual feedback directly at the enabling switch.


Pushbuttons

Additional functions can be run directly at the enabling switch using the pushbuttons.

Cable

The high-quality connecting cables are available in a straight version.

Dimensional drawings

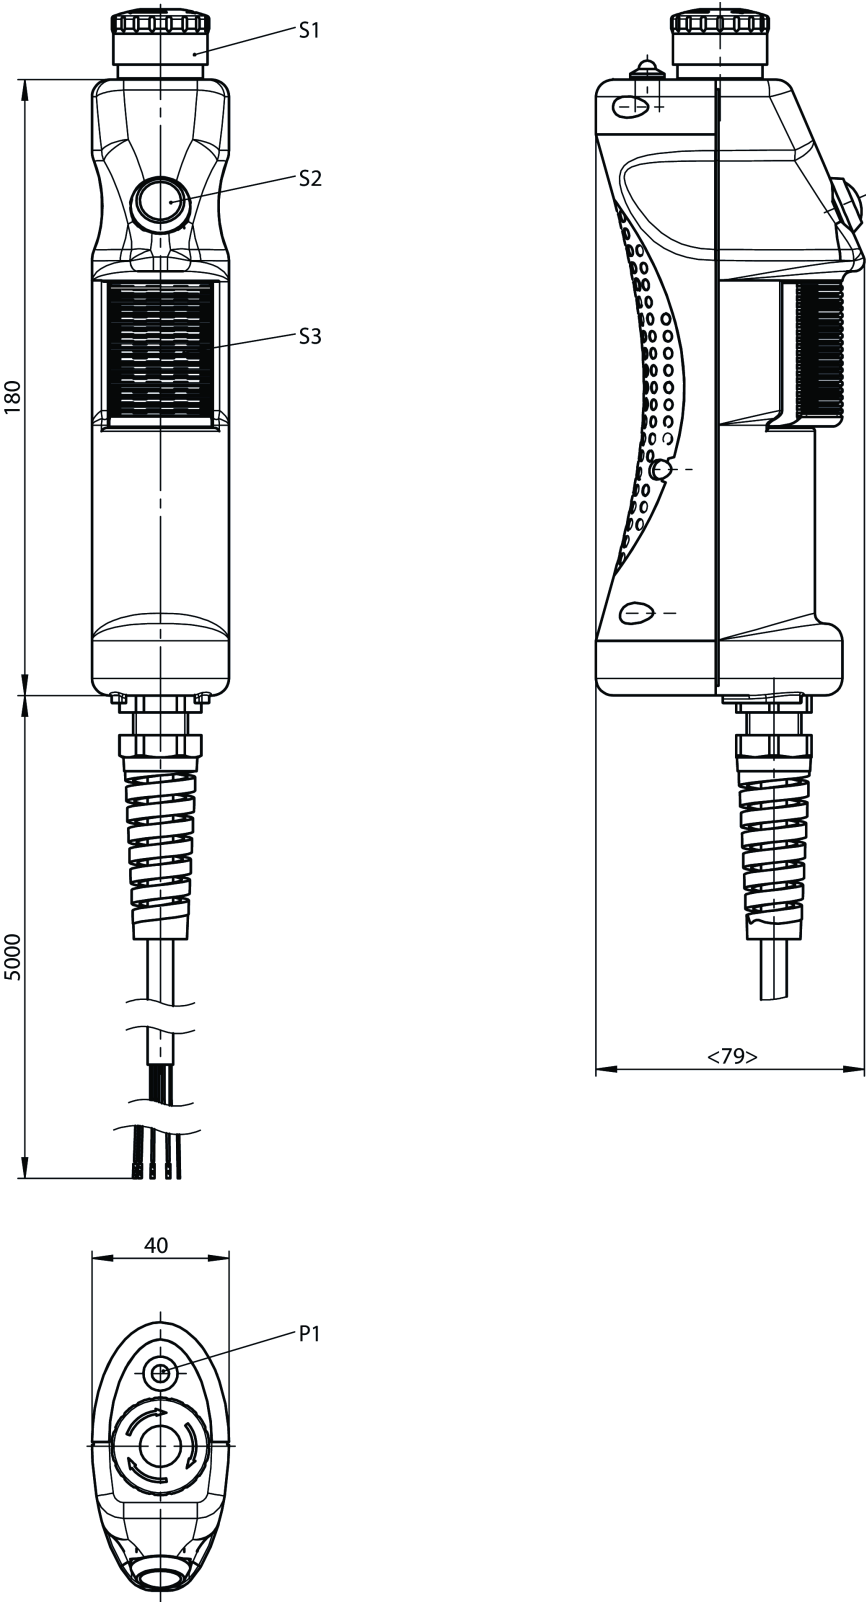

Connection examples

