

NZ2HB-511L060C1630 (Order no. 054121)

Safety switch NZ.HB, lever arm with plastic roller, plug connector SR6

- ▶ Lever arm, plastic roller ø 18 mm
- ▶ Version A according to EN 50041
- ▶ SR6 plug connector; 6-pin + PE
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12–60 V yellow



Approach direction



Horizontal

Can be adjusted in 90° steps

Switching direction adjustable

Right, left or both sides


LED indicator

The switch has one freely assignable LED indicator.

Switching element

511 Snap-action switching contact, 1 positively driven contact $\rightarrow$ + 1 NO contact

Dimensional drawings

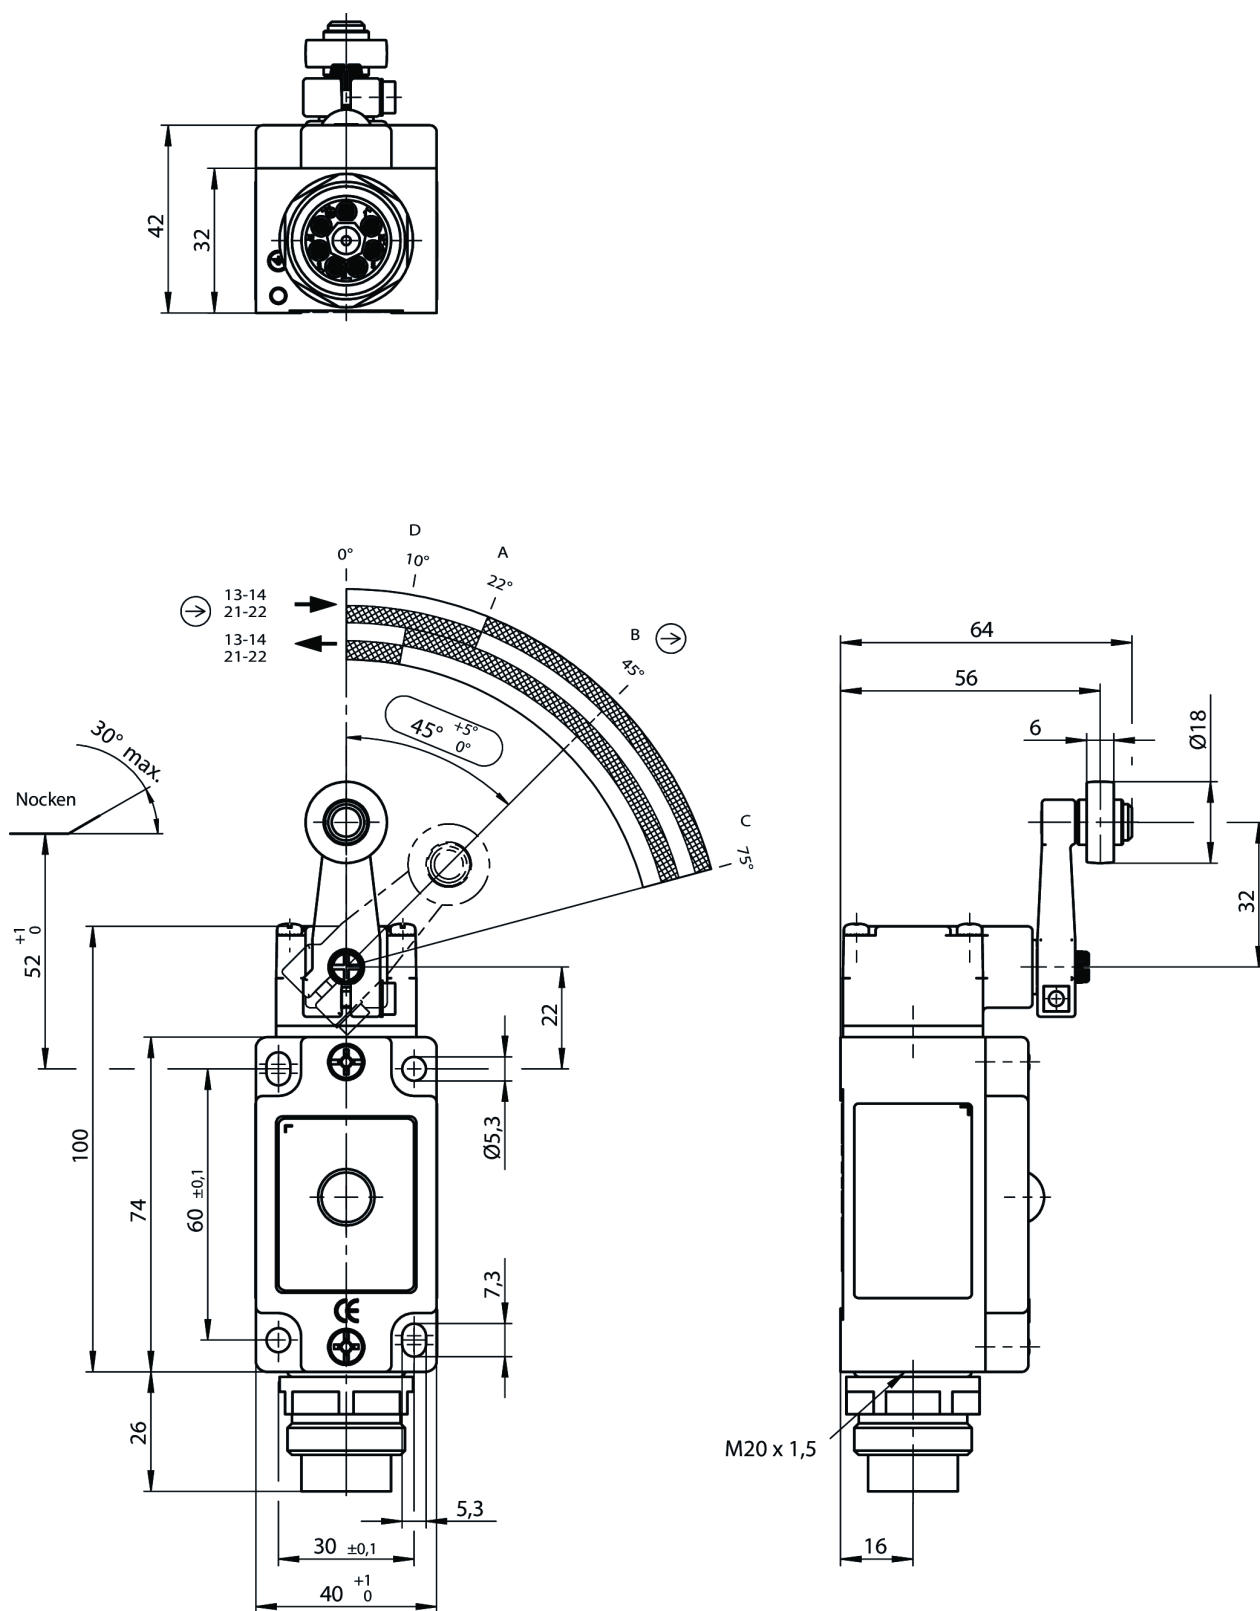

A=Operating point

B=Positively driven travel

C=End position

D=Reset point

Connection examples

