


MGB-L2HECB-PNC-R-114776 (Order no. 114776)

Locking set MGB-L2...-PN... (guard locking by solenoid force) with 11 controls and indicators, push-pull plug, RC12

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 8 illuminated pushbuttons
- ▶ Operating mode selector
- ▶ 1 indicator
- ▶ Push-pull plug
- ▶ including terminal plug for enabling switch (RC12, 12-pin)
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ With escape release
- ▶ Multicode

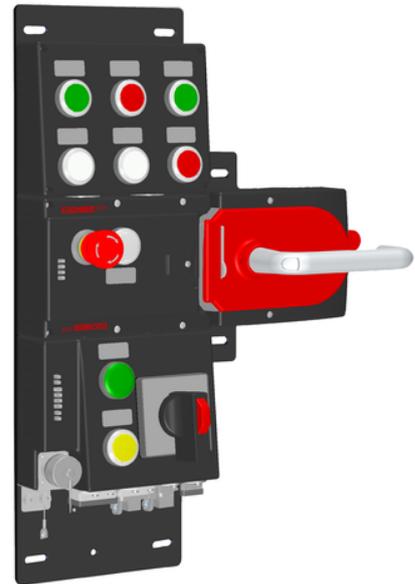

Profinet connection

Connection via push-pull plugs according to IEC 61076-3-117

Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.

Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.