

## NZ2HS-511SVM5 (Order no. 090867)

### Safety switch NZ.HS, lever arm with steel roller, plug connector M12

- ▶ Lever arm, steel roller  $\varnothing$  18 mm
- ▶ Version A according to EN 50041
- ▶ Plug connector M12, 5-pin
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



#### Approach direction



Horizontal

Can be adjusted in 90° steps


#### Switching direction adjustable

Right, left or both sides

#### Switching element

511 Snap-action switching contact, 1 positively driven contact  $\rightarrow$ + 1 NO contact

## Dimensional drawings

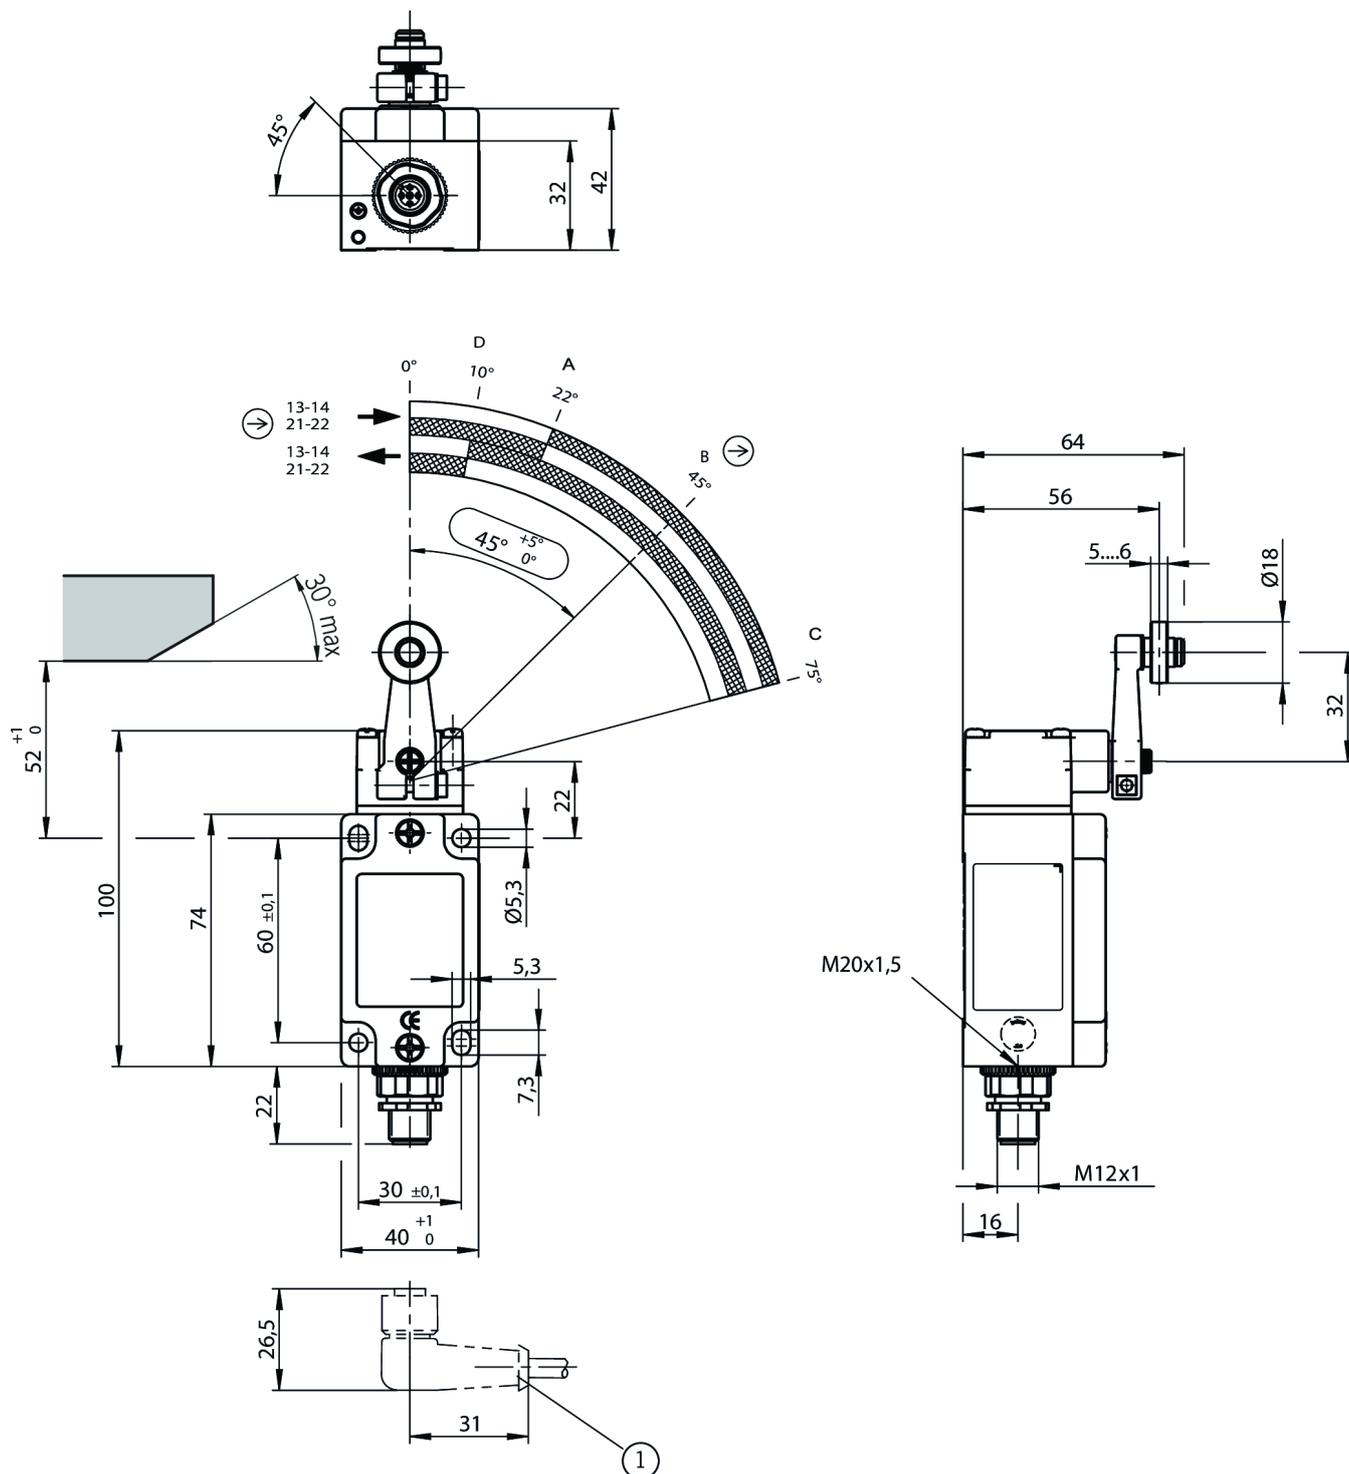

1 Right-angle plug connector: cable outlet adjustable max. 270°; default setting for cable outlet right.

A=Operating point

B=Positively driven

C=End position

D=Reset point

Connection examples

