


C-MINF12-12X1,0PV09,1-MA-100962 (Order no. 100962)

Connecting cable with plug connector MR12, 12-pin, 9.1 m


- ▶ MR12 female plug, 12-pin
- ▶ Straight plug connector
- ▶ PVC cable
- ▶ Cable length 9.1 m
- ▶ With flying lead

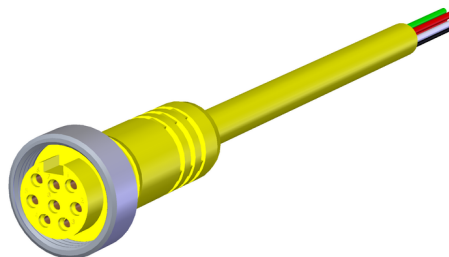

Connector assignment

	1	OG
	2	BU
	3	WH/BK
	4	RD/BK
	5	GN/BK
	6	OG/BK
	7	BU/BK
	8	BK/WH
	9	GN/YE
	10	RD
	11	WH
	12	BK

Dimensional drawings

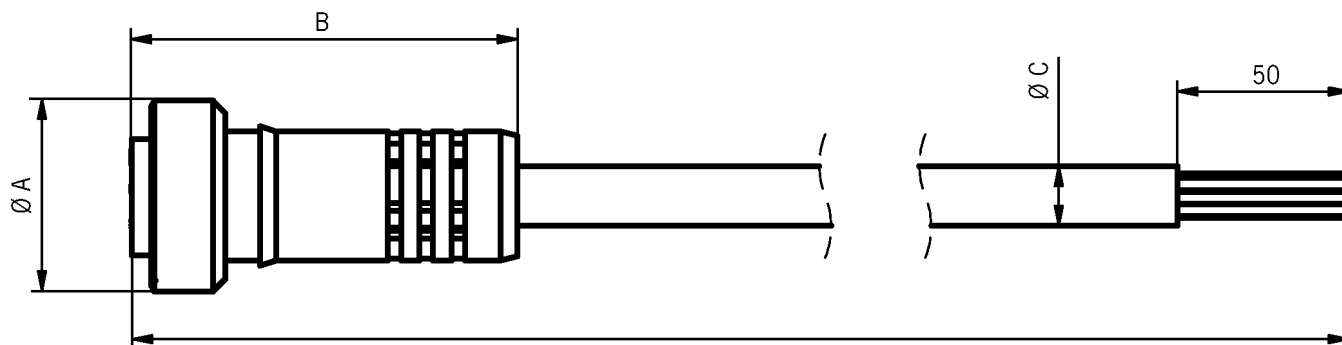

Dimension A \varnothing 32 Dimension B 64 Dimension C \varnothing 9.8

Technical data

Approvals



Electrical connection values

Rated voltage	300 V
---------------	-------

Mechanical values and environment

Conductor cross-section	18 AWG
Number of conductors	12
Storage temperature	-40 ... 80 °C
Cable type	straight
Cable diameter	approx. 10.4 mm
Cable length	9.1 m
Drag chain suitability	No
Ambient temperature	-40 ... 80 °C
Material	Sheath PVC

Connection 2

Conductor end	Sheath stripped
Connection type	flying lead

Connection 1

Connection type	Plug connector BHA12
Connection type	Female plug
Cable outlet	straight
Number of pins	12
Degree of protection	IP67
Plug lock	Screw connection

Material

Plug lock Plastic