

## N1AR508LE060-M (Order no. 087219)

Single limit switch N1AR, roller plunger, steel roller  $\varnothing$  8 mm, cable entry M16 x 1.5

- ▶ Roller plunger, steel roller  $\varnothing$  8 mm
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16 x 1.5
- ▶ 1 pos. driven contact
- ▶ LED indicator: AC/DC 12–60 V red



### Approach direction



Horizontal

Can be adjusted in 90° steps



### LED indicator

The switch has one freely assignable LED indicator.


### Switching element

508 Slow-action switching contact 1 positively driven contact  $\rightarrow$

## Dimensional drawings

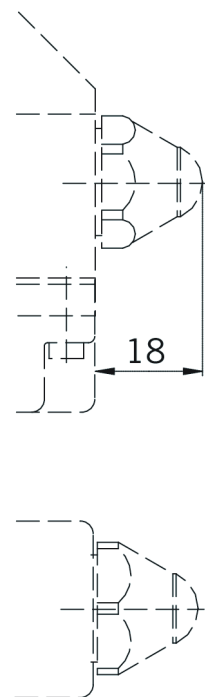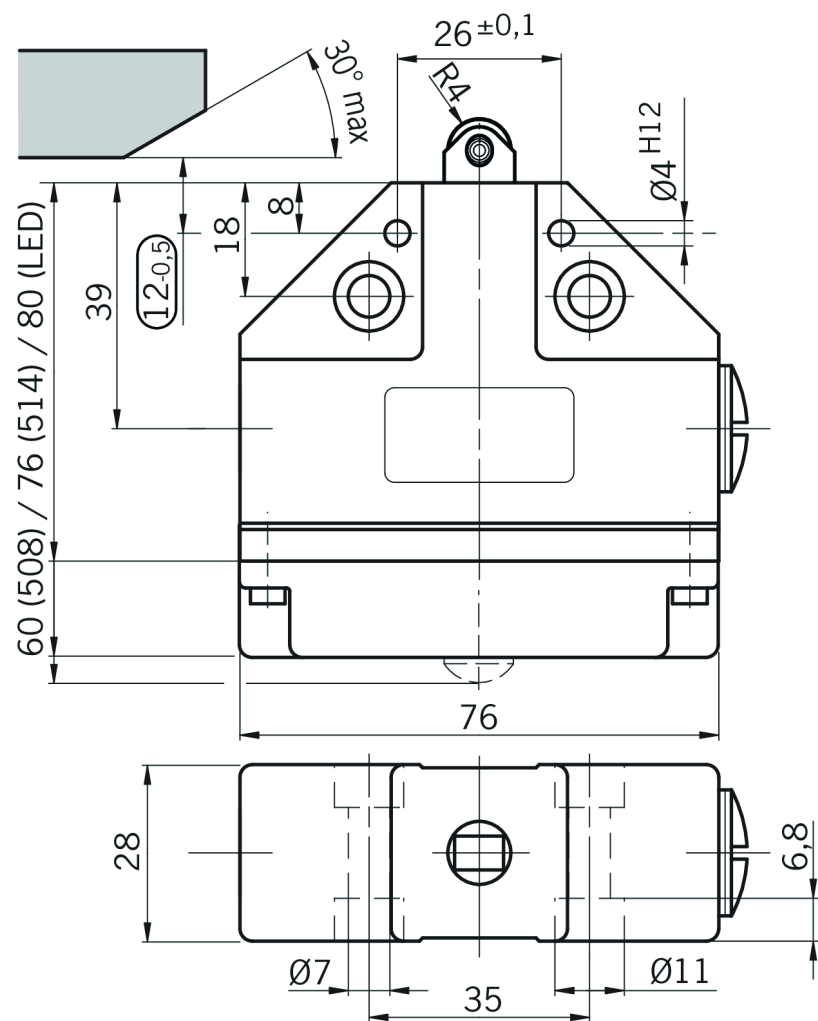

## Connection examples

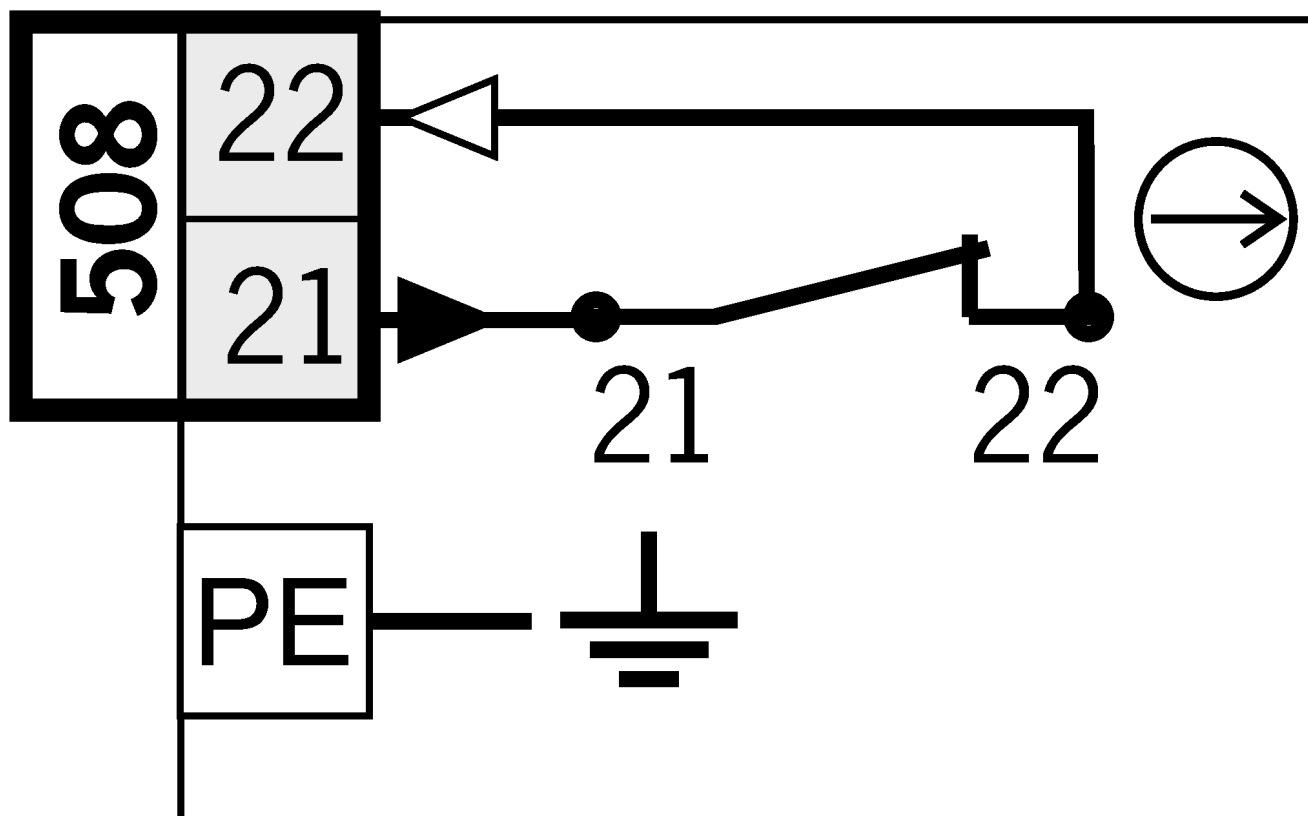

## Shift travel diagrams

