


MGB-L1HEB-PNA-R-158416 (Order no. 158416)

Locking set MGB-L1...-PN (guard locking by spring force) with 2 control elements, 7/8" and M12 plugs

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 2 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ With escape release
- ▶ Unicode

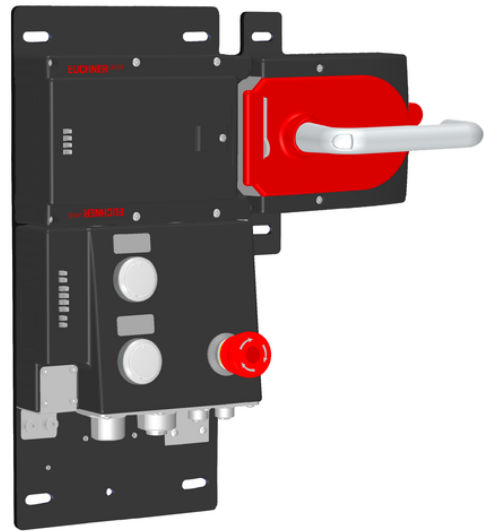

Profinet connection

7/8" plugs according to ANSI/B93.55M-1981 and M12 plugs (d-coded) according to IEC 61076-2-101

Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.

Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

Illuminated emergency stop

Emergency stop with illumination that can be controlled as required.

Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.

Adhesive labels

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.

Dimensional drawings

