


## **C-M23F19-19XDIFPU25,0-MA-092912 (Order no. 092912)**

**Connecting cable with plug connector M23 with option C1825, 25 m, angled**

- ▶ M23 plug connector, 18-pin + PE
- ▶ Angled plug connector
- ▶ Cable exit C (left)
- ▶ PUR cable
- ▶ Cable length 25 m
- ▶ With flying lead
- ▶ Cores color-coded



## Connector assignment

| Plug connector (view of connection side)                                          | Pin | Cross-section       | Conductor coloring |
|-----------------------------------------------------------------------------------|-----|---------------------|--------------------|
|  | 1   | 0.5 mm <sup>2</sup> | VT                 |
|                                                                                   | 2   | 0.5 mm <sup>2</sup> | RD                 |
|                                                                                   | 3   | 0.5 mm <sup>2</sup> | GY                 |
|                                                                                   | 4   | 0.5 mm <sup>2</sup> | RDBU               |
|                                                                                   | 5   | 0.5 mm <sup>2</sup> | GN                 |
|                                                                                   | 6   | 1.0 mm <sup>2</sup> | BU                 |
|                                                                                   | 7   | 0.5 mm <sup>2</sup> | GYPK               |
|                                                                                   | 8   | 0.5 mm <sup>2</sup> | GNWH               |
|                                                                                   | 9   | 0.5 mm <sup>2</sup> | YEWH               |
|                                                                                   | 10  | 0.5 mm <sup>2</sup> | GYWH               |
|                                                                                   | 11  | 0.5 mm <sup>2</sup> | BK                 |
|                                                                                   | 12  | 1.0 mm <sup>2</sup> | GNYE               |
|                                                                                   | 13  | 0.5 mm <sup>2</sup> | PK                 |
|                                                                                   | 14  | 0.5 mm <sup>2</sup> | BNGY               |
|                                                                                   | 15  | 0.5 mm <sup>2</sup> | BNYE               |
|                                                                                   | 16  | 0.5 mm <sup>2</sup> | BNGN               |
|                                                                                   | 17  | 0.5 mm <sup>2</sup> | WH                 |
|                                                                                   | 18  | 0.5 mm <sup>2</sup> | YE                 |
|                                                                                   | 19  | 1.0 mm <sup>2</sup> | BN                 |

## Dimensional drawings

CEM-C40



CTP / CTA



CET



Bei der gezeigten Einbaulage des Geräts gilt:



Leitungsabgang C  
(links)

Leitungsabgang A  
(rechts)



- 1 The following applies to the device installation position shown: cable outlet C (left)
- 2 The following applies to the device installation position shown: cable outlet A (right)

## Dimensional drawings

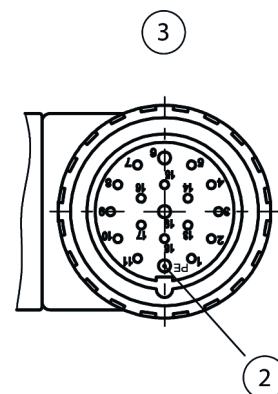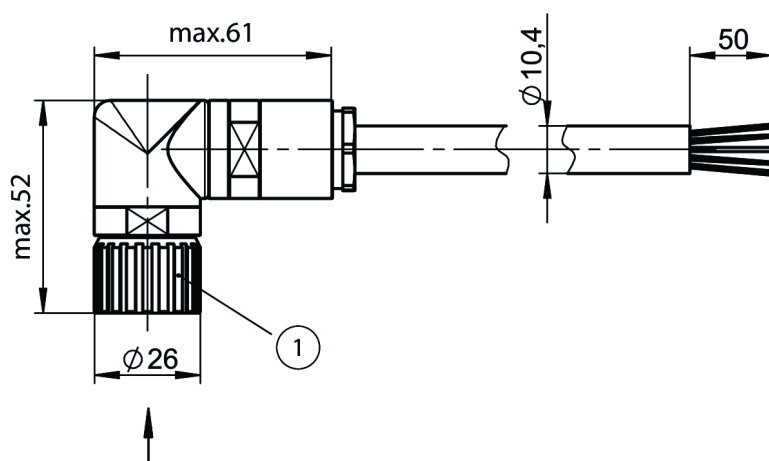

- 1 Female plug with union nut M23, 19-pin, with shield spring
- 2 PIN 12 (PE with shield spring)
- 3 Terminal assignment as seen from the connection side cable outlet C