

NZ1RK-3131-M (Order no. 090908)

Safety switch NZ.RK, roller plunger, steel roller \varnothing 8 mm, cable entry M20 x 1.5

- ▶ Roller plunger, steel roller \varnothing 8 mm
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact
- ▶ 2 NO contacts



Approach direction




Horizontal

Can be adjusted in 90° steps

Switching element

3131H Slow-action switching contact 2 positively driven contacts $\ominus \rightarrow$ + 2 NO contact

Dimensional drawings

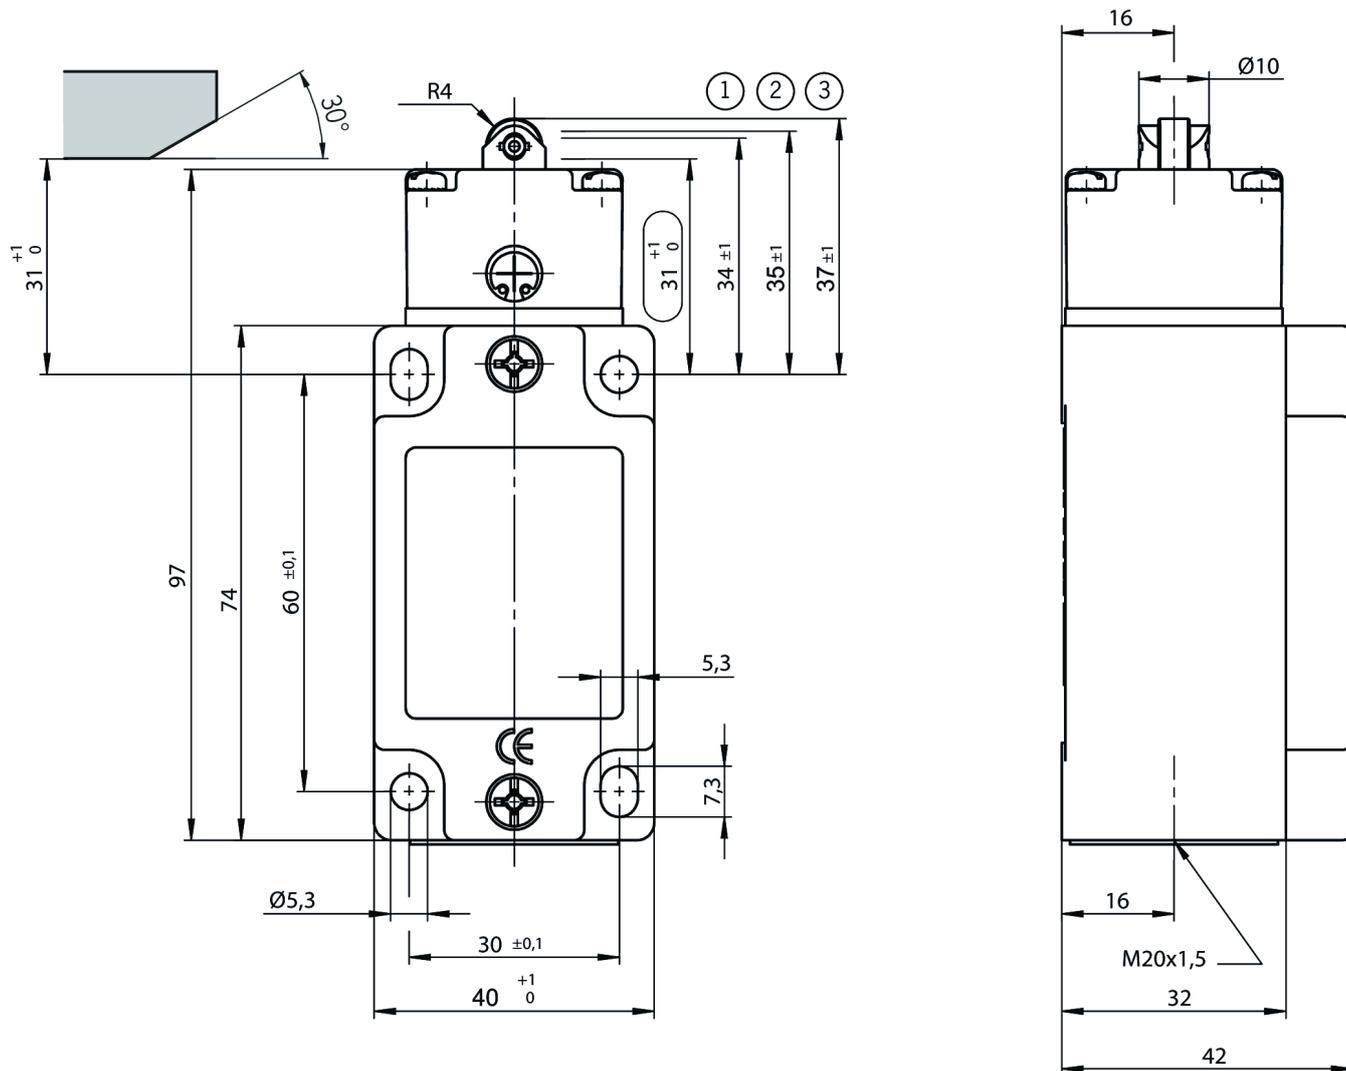

1 Operating point NO contact 13-14; 33-34

2 Operating point NC contact 21-22; 41-42

3 Free position

Connection examples

