

NZ1HS-3131-MC1779 (Order no. 079996)

Safety switch NZ.HS, lever arm with steel roller, cable entry M20 x 1.5

- ▶ Lever arm, steel roller ø 18 mm
- ▶ Cable entry M20 x 1.5
- ▶ 2 pos. driven contact
- ▶ 2 NO contacts
- ▶ Roller mounted on inside of lever



Approach direction



Horizontal

Can be adjusted in 90° steps



Switching direction adjustable

Right, left or both sides

Switching element

3131H Slow-action switching contact 2 positively driven contacts $\rightarrow$ + 2 NO contact

Dimensional drawings

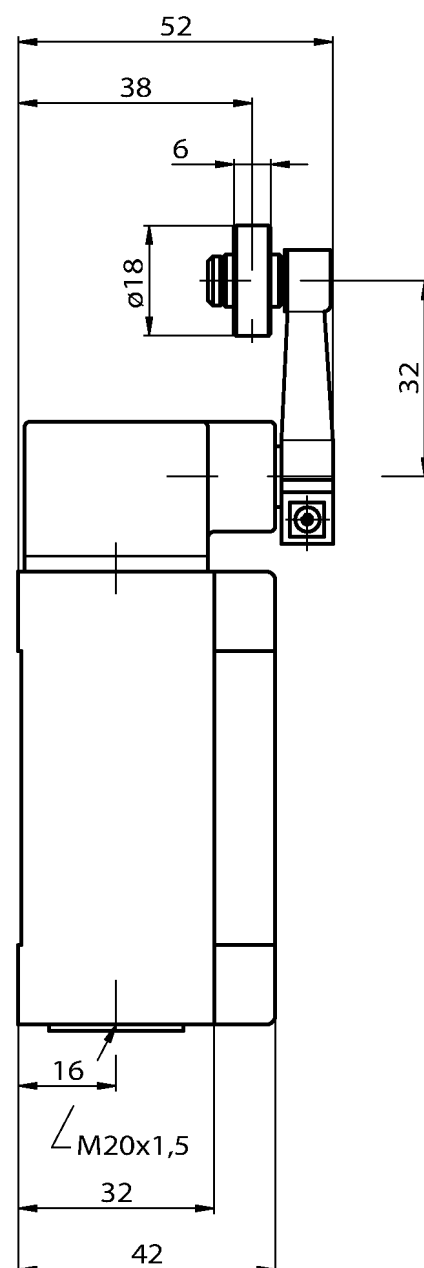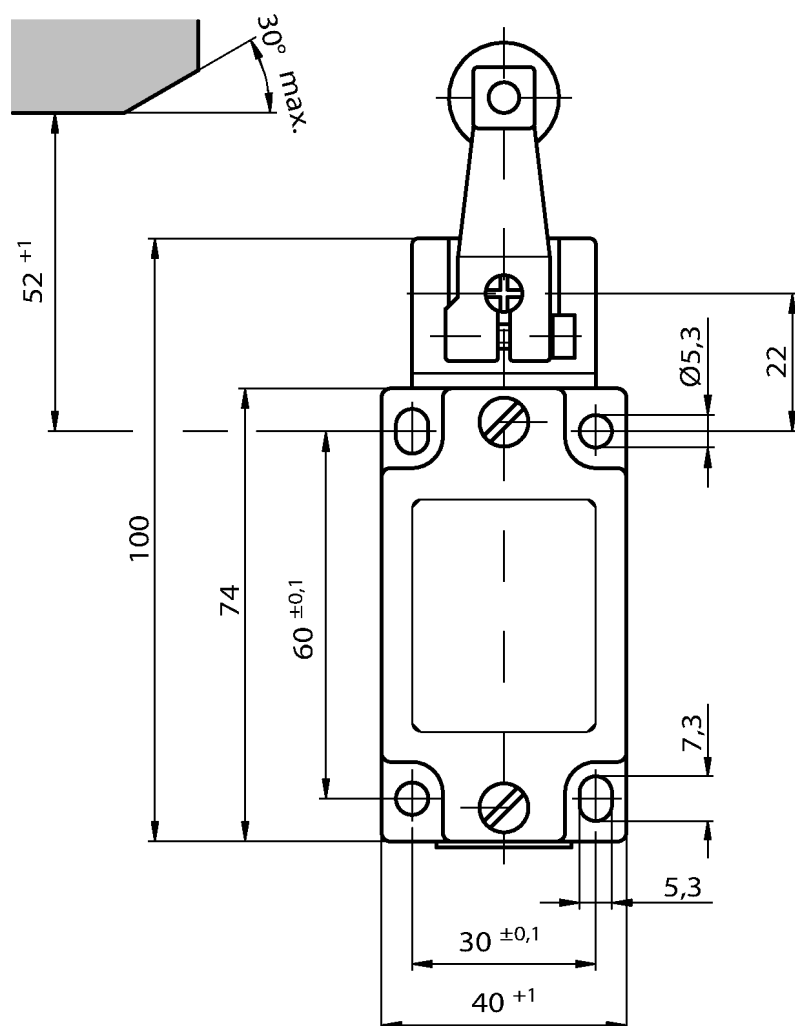

Connection examples

