


## N1AW508-M (Order no. 087205)

### Single limit switch N1AW, rounded plunger, cable entry M16x1.5

- ▶ Rounded plunger
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16x1.5
- ▶ 1 pos. driven contact



### Approach direction




Horizontal and vertical


### Switching element

508 Slow-action switching contact 1 positively driven contact 


Dimensional drawings

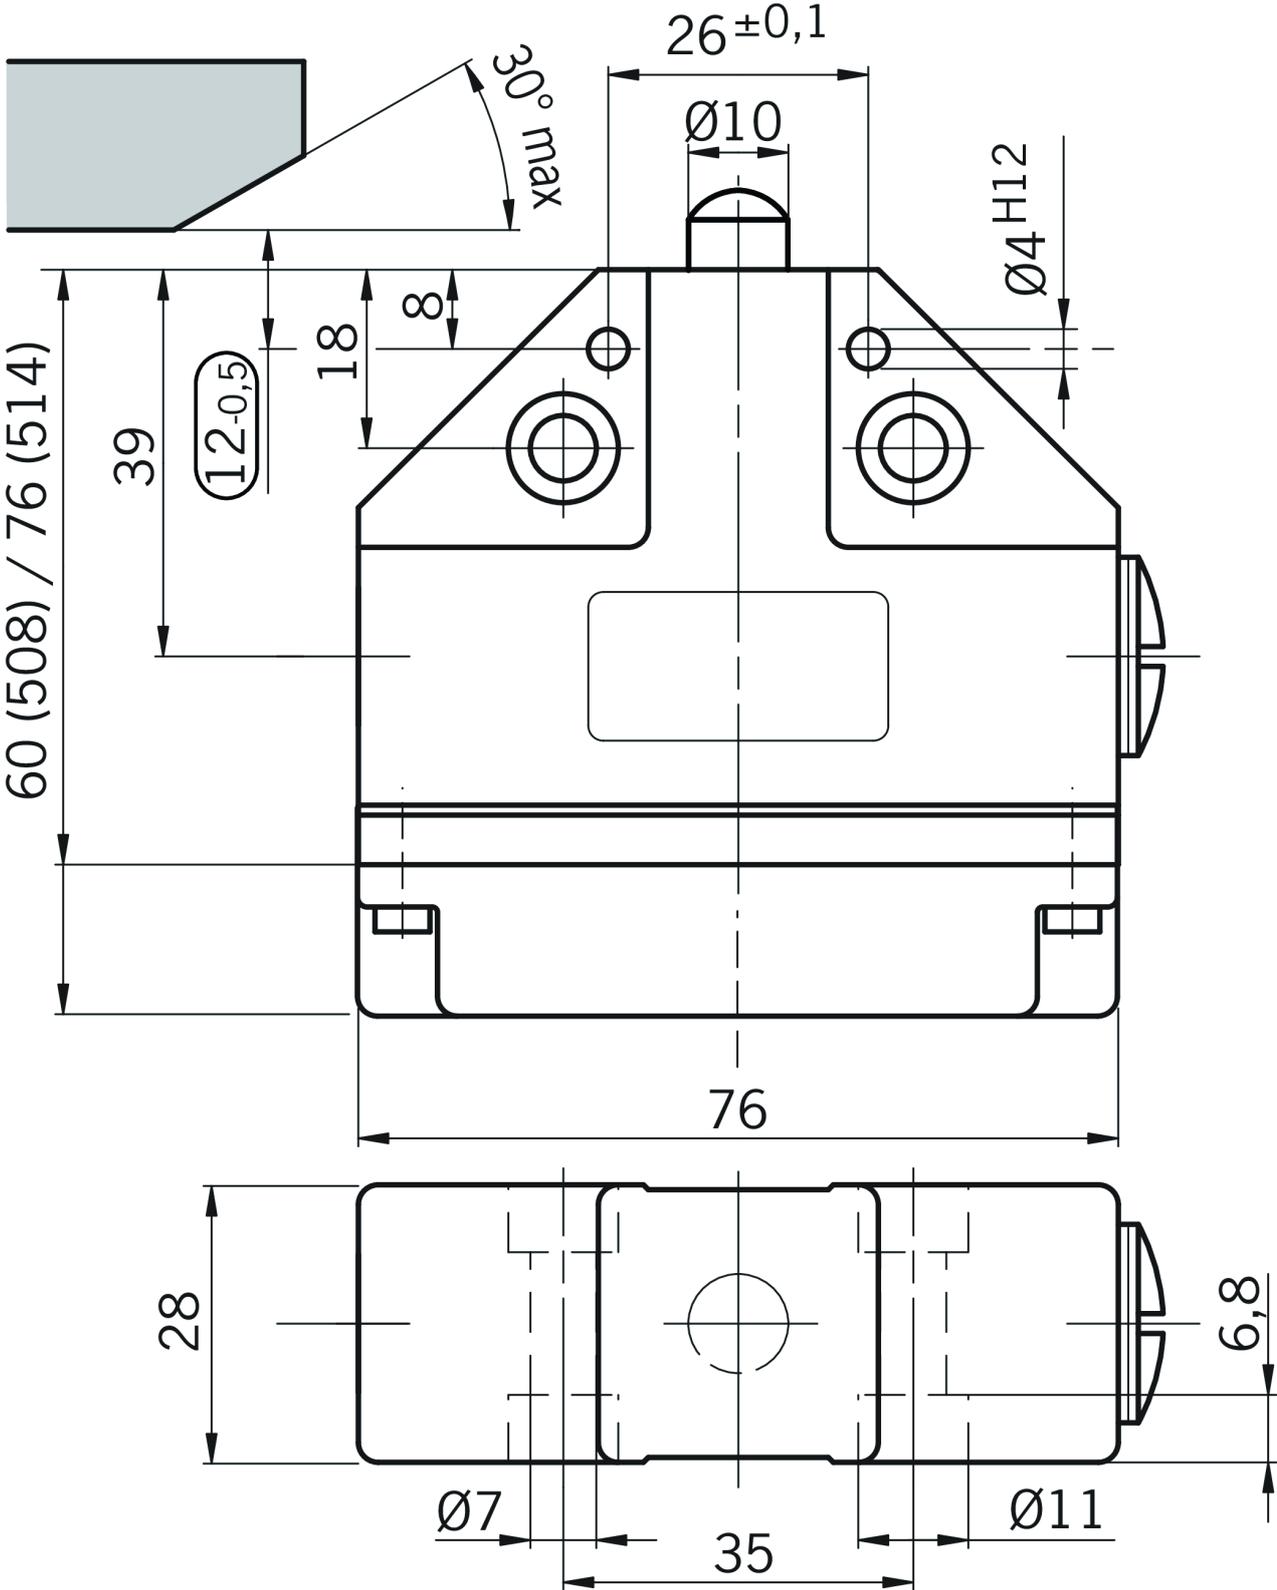

## Connection examples

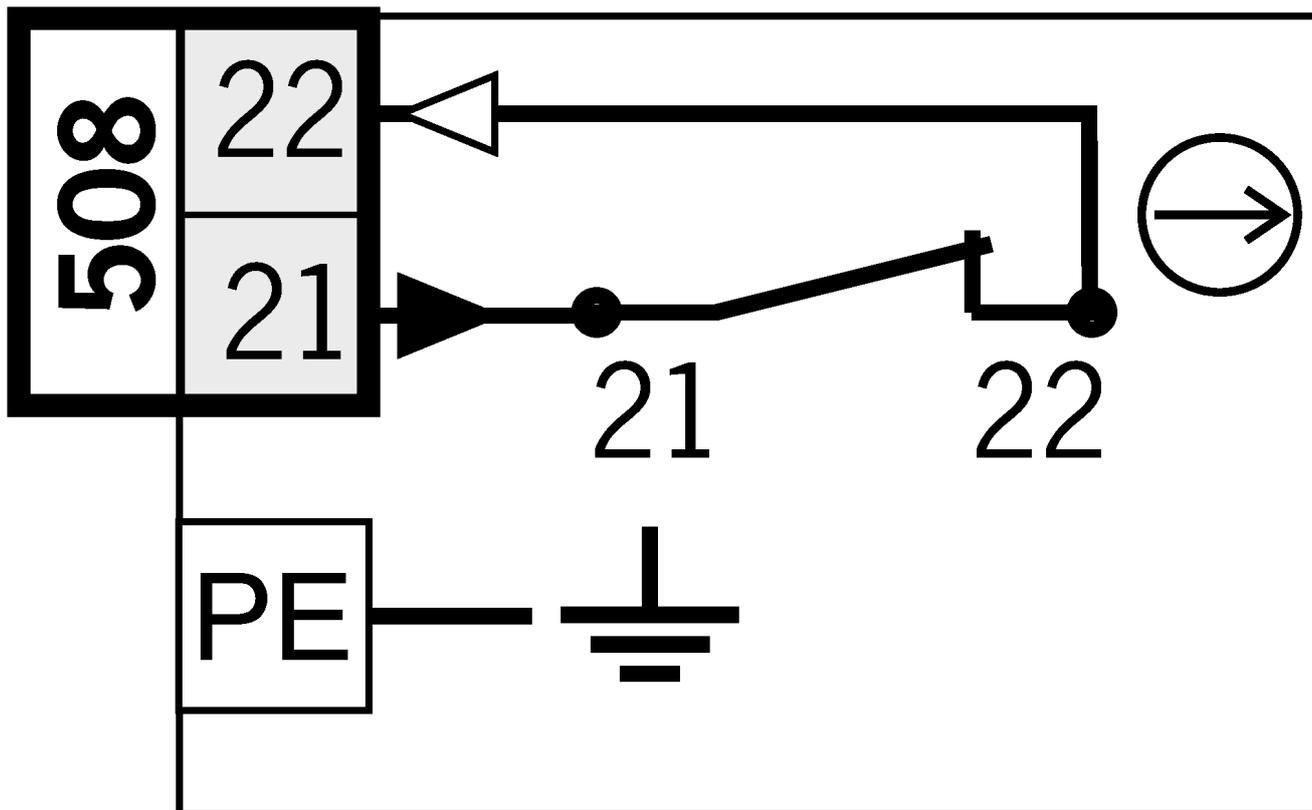

## Shift travel diagrams

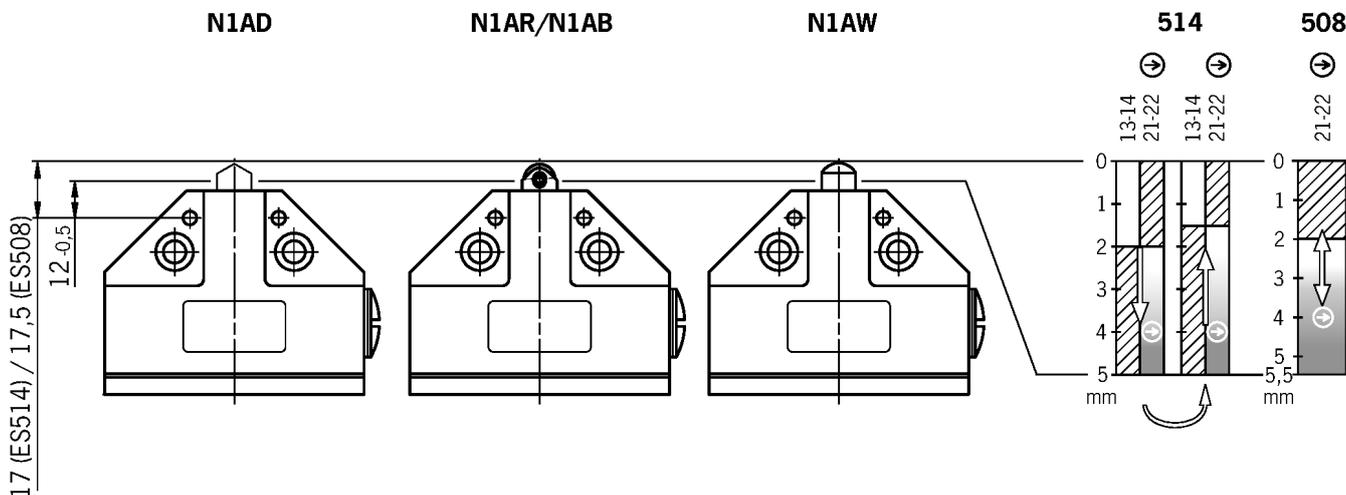

- g\_Kontakte\_geschlossen\_sw.eps      Contacts closed
- g\_Kontakte\_offen\_sw.eps              Contacts open
- g\_Kontakte\_zwangsgeoeffnet\_sw.eps   Contacts positively driven