

NZ1RG-528-M (Order no. 090932)

Safety switch NZ.RG, roller plunger, plastic roller \varnothing 12 mm, cable entry M20 x 1.5

- ▶ Roller plunger, plastic roller \varnothing 12 mm
- ▶ Version C according to EN 50041
- ▶ Cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction




Horizontal

Can be adjusted in 90° steps

Switching element

528H Slow-action switching contact 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

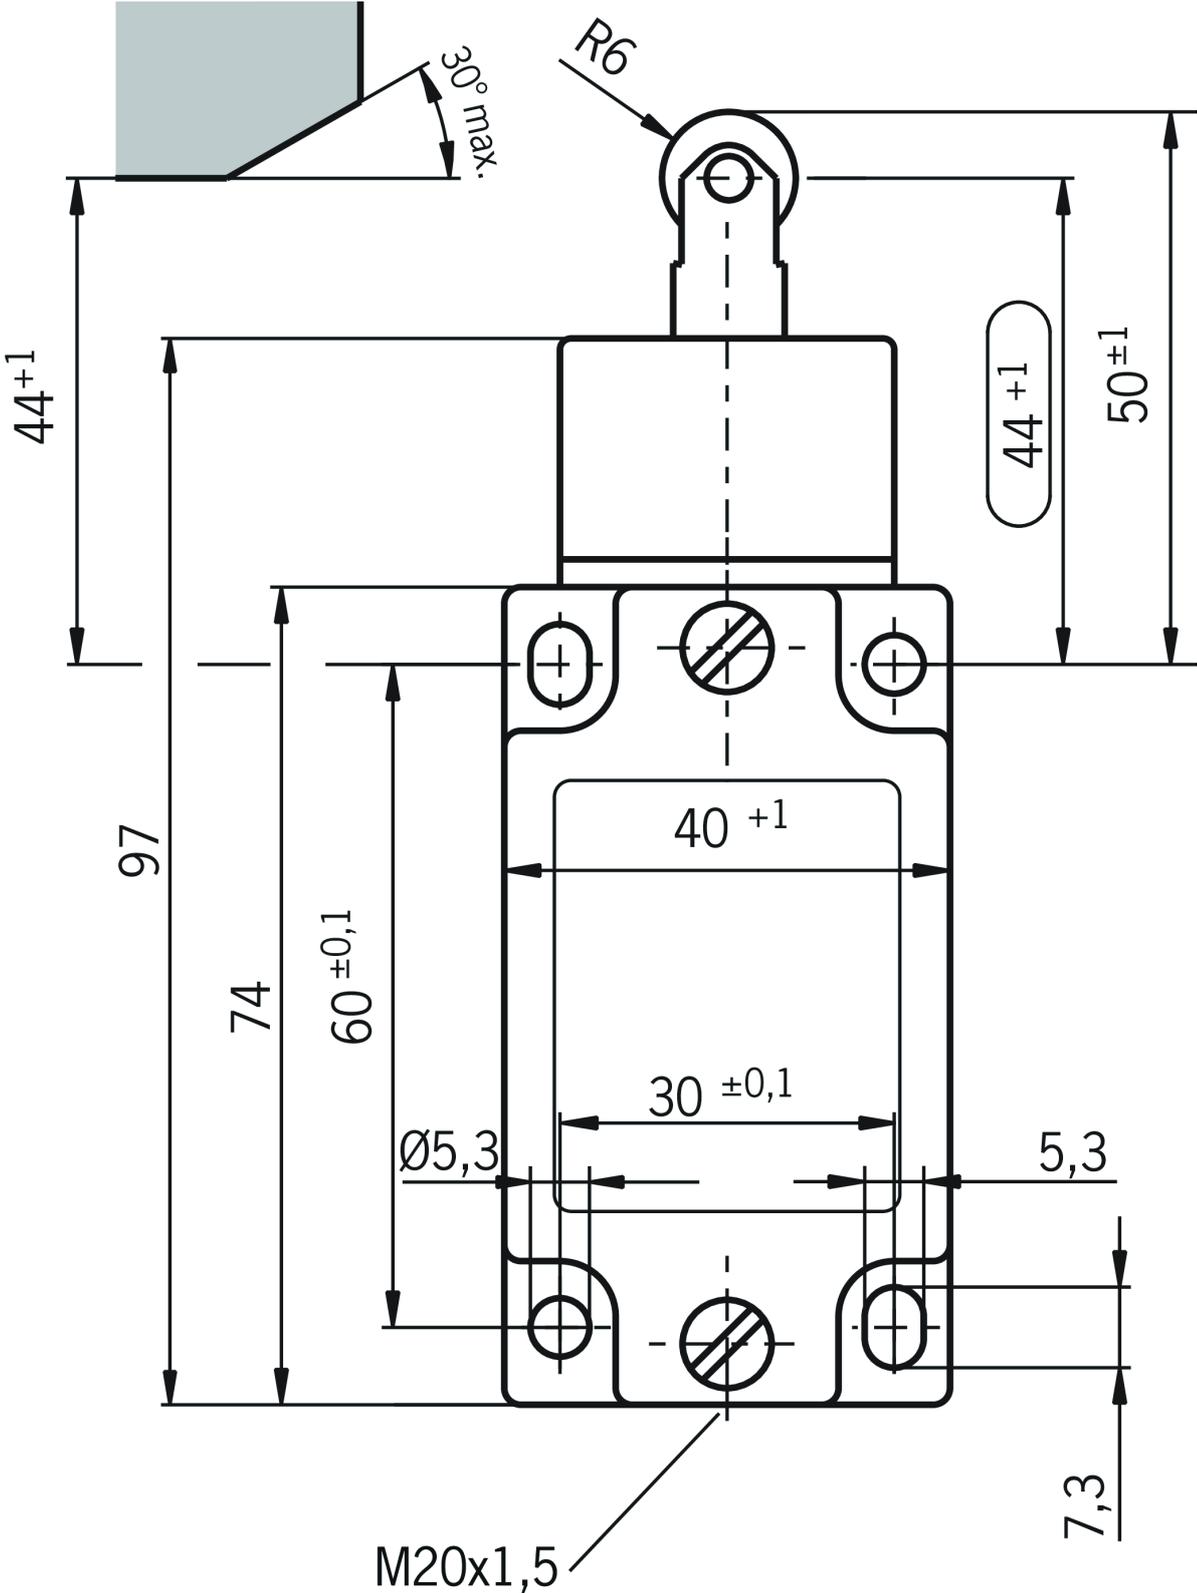

Connection examples

