


Project : _____
 Type : _____
 Drawn by : _____
 Catalogue No. : _____
 Date : _____

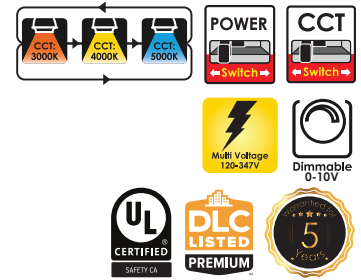

Specifications


| Model No. | | <input type="checkbox"/> VO-ALW15FT2-347-3WAY -P-W-D-X | <input type="checkbox"/> VO-ALW15FT2-347-3WAY -P-B-D-X | <input type="checkbox"/> VO-ALW50FT4-347-3WAY -P-W-D-X | <input type="checkbox"/> VO-ALW50FT4-347-3WAY -P-B-D-X | <input type="checkbox"/> VO-ALW100FT8-347-3WAY -P-W-D-X | <input type="checkbox"/> VO-ALW100FT8-347-3WAY -P-B-D-X |
|------------------------|---------------------------------|---|---|---|---|--|--|
| General | Watts | 10-13-15W | 10-13-15W | 30-40-50W | 30-40-50W | 60-80-100W | 60-80-100W |
| | HID Equivalent | Min.26W, Max. 40W | Min.26W, Max. 40W | Min.78W, Max. 130W | Min.78W, Max. 130W | 2xMin.78W, Max. 130W | 2xMin.78W, Max. 130W |
| | Lumen | 1300-1690-1950LM | 1300-1690-1950LM | 3900-5200-6500LM | 3900-5200-6500LM | 7800-10400-13000LM | 7800-10400-13000LM |
| | Efficiency | 130LM/W | 130LM/W | 130LM/W | 130LM/W | 130LM/W | 130LM/W |
| | CCT | | 3000/4000/5000 ADJ | 3000/4000/5000 ADJ | 3000/4000/5000 ADJ | 3000/4000/5000 ADJ | 3000/4000/5000 ADJ |
| | Volts | AC120-347V | AC120-347V | AC120-347V | AC120-347V | AC120-347V | AC120-347V |
| | CRI | >80 | >80 | >80 | >80 | >80 | >80 |
| | Beam Angel | 120degree | 120degree | 120degree | 120degree | 120degree | 120degree |
| | Hours Rated | 50000 hours | 50000 hours | 50000 hours | 50000 hours | 50000 hours | 50000 hours |
| | Installation ways | Pendant, wall mounted, surface mounted | Pendant, wall mounted, surface mounted | Pendant, wall mounted, surface mounted | Pendant, wall mounted, surface mounted | Pendant, wall mounted, surface mounted | Pendant, wall mounted, surface mounted |
| IP rating | IP20 | IP20 | IP20 | IP20 | IP20 | IP20 | |
| Linkable | Yes Max. linkable qty: 48pcs | Yes Max. linkable qty: 48pcs | Yes Max. linkable qty: 16pcs | Yes Max. linkable qty: 16pcs | Yes Max. linkable qty: 8pcs | Yes Max. linkable qty: 8pcs | |
| Electrical | Operating Frequency | 50-60Hz | 50-60Hz | 50-60Hz | 50-60Hz | 50-60Hz | 50-60Hz |
| | Power Factor | >0.9 | >0.9 | >0.9 | >0.9 | >0.9 | >0.9 |
| | Flicker percentage | <5% | <5% | <5% | <5% | <5% | <5% |
| | Surge Protection | L/N-1KV | L/N-1KV | L/N-1KV | L/N-1KV | L/N-1KV | L/N-1KV |
| | Operating Temperature | -20°C TO 40°C | -20°C TO 40°C | -20°C TO 40°C | -20°C TO 40°C | -20°C TO 40°C | -20°C TO 40°C |
| Physical | Dimension | 23.62X2.95X2.36 in | 23.62X2.95X2.36 in | 47.24X2.95X2.36 in | 47.24X2.95X2.36 in | 94.49X2.95X2.36 in | 94.49X2.95X2.36 in |
| | Housing | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum | Aluminum |
| | Housing finish color | White, RAL9016 | Black, RAL9011 | White, RAL9016 | Black, RAL9011 | White, RAL9016 | Black, RAL9011 |
| | Diffuser material | PC | PC | PC | PC | PC | PC |
| | Weight | 3.09lb | 3.09lb | 5.07lb | 5.07lb | 9.7lb | 9.7lb |
| Additional Information | Rated For Enclosed Fixture | 3CCT+3Power adjustable | 3CCT+3Power adjustable | 3CCT+3Power adjustable | 3CCT+3Power adjustable | 3CCT+3Power adjustable | 3CCT+3Power adjustable |
| | Warranty | 5 years | 5 years | 5 years | 5 years | 5 years | 5 years |
| Compliance | Safety Listing | CUL-Listed | CUL-Listed | CUL-Listed | CUL-Listed | CUL-Listed | CUL-Listed |
| | Location Rating | Damp | Damp | Damp | Damp | Damp | Damp |
| | Energy Star | No | No | No | No | No | No |
| | DLC Approved | Yes,DLC5.1 Premium | Yes,DLC5.1 Premium | Yes,DLC5.1 Premium | Yes,DLC5.1 Premium | Yes,DLC5.1 Premium | Yes,DLC5.1 Premium |
| DLC ID | S-YO0L8N | S-YO0L8N | S-OGYPIB | S-OGYPIB | S-EZFXHK | S-EZFXHK | |

Features & Specifications


| | |
|-------------------------|--|
| Construction | <ul style="list-style-type: none"> Aluminum housing, low profile, upscale design 3 CCTs and 3 Powers Selectable provides more options on site and save SKU in warehousing Screwless end cap and buckle joint ensure tool-free connecting Indirect/direct lighting mode for options Various different installation accessories for different application: pendant, wall mounted, surface mounted Various different accessories for different shape: I, L, T, X, V |
| | <ul style="list-style-type: none"> Pendant Optional accessories for different installation: wall mounted, surface mounted |
| Mounting | <ul style="list-style-type: none"> Available in 3000K/4000/5000K selectable color temperature 80+ CRI, SDCM<5 Electrical ratings: 120-347 V Estimated life of over 100,000 hours to L70 0-10V dimming driver Flicker percentage<5%, meet IEEE standard Operating temperature: -20°C to 40°C (-4°F to 104°F) |
| | <ul style="list-style-type: none"> cULus certified for Damp locations DLC5.1 Premium |
| Performance Data | |
| Compliances | |

Dimensions & Weights

| Model.No | 2FT | 4FT | 8FT |
|------------------|-----------------------------------|------------------------------------|------------------------------------|
| Size in. (mm) | 23.62X2.95X2.36 in (600X75X60) | 47.24X2.95X2.36 in (1200X75X60) | 94.49X2.95X2.36 in (2400X75X60) |
| Net weight (lbs) | 3.09lb | 5.07lb | 9.7lb |
| Package | 1pc/box 6pcs/ctn | 1pc/box 6pcs/ctn | 1pc/box 4pcs/ctn |

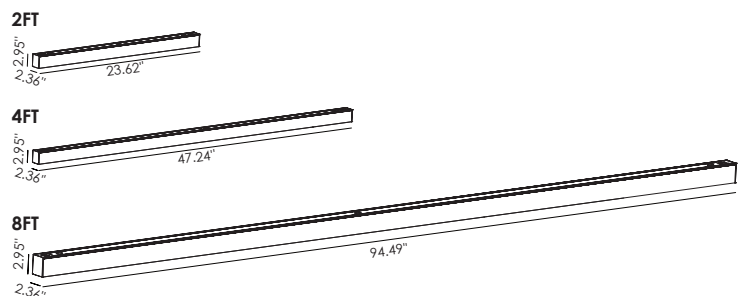

Product Details

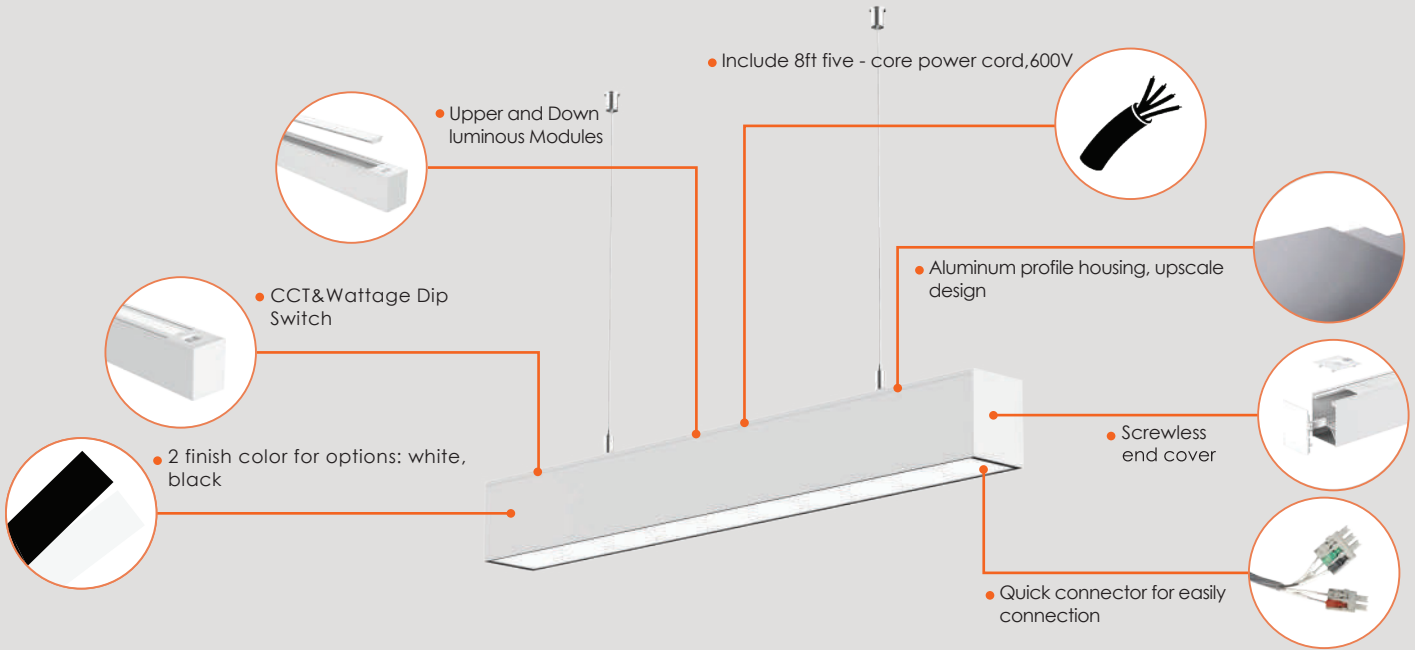


Connections



I connector, I shape; Max. linkable: 8FT-8PCS,4FT-16PCS,2FT-48PCS



X connector, X shape

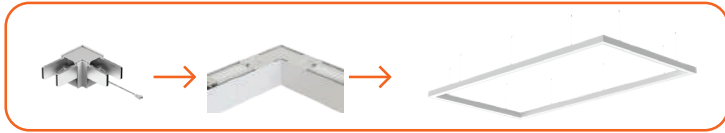

L connector, rectangle shape



V connector, Hexagon shape(120 degree)



T connector, T shape