

NZ2HB-528 (Order no. 090845)

Safety switch NZ.HB, lever arm with plastic roller, plug connector SR6

- ▶ Lever arm, plastic roller \varnothing 18 mm
- ▶ Version A according to EN 50041
- ▶ SR6 plug connector; 6-pin + PE
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction



Horizontal

Can be adjusted in 90° steps


Switching direction adjustable

Right, left or both sides

Switching element

528H Slow-action switching contact 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

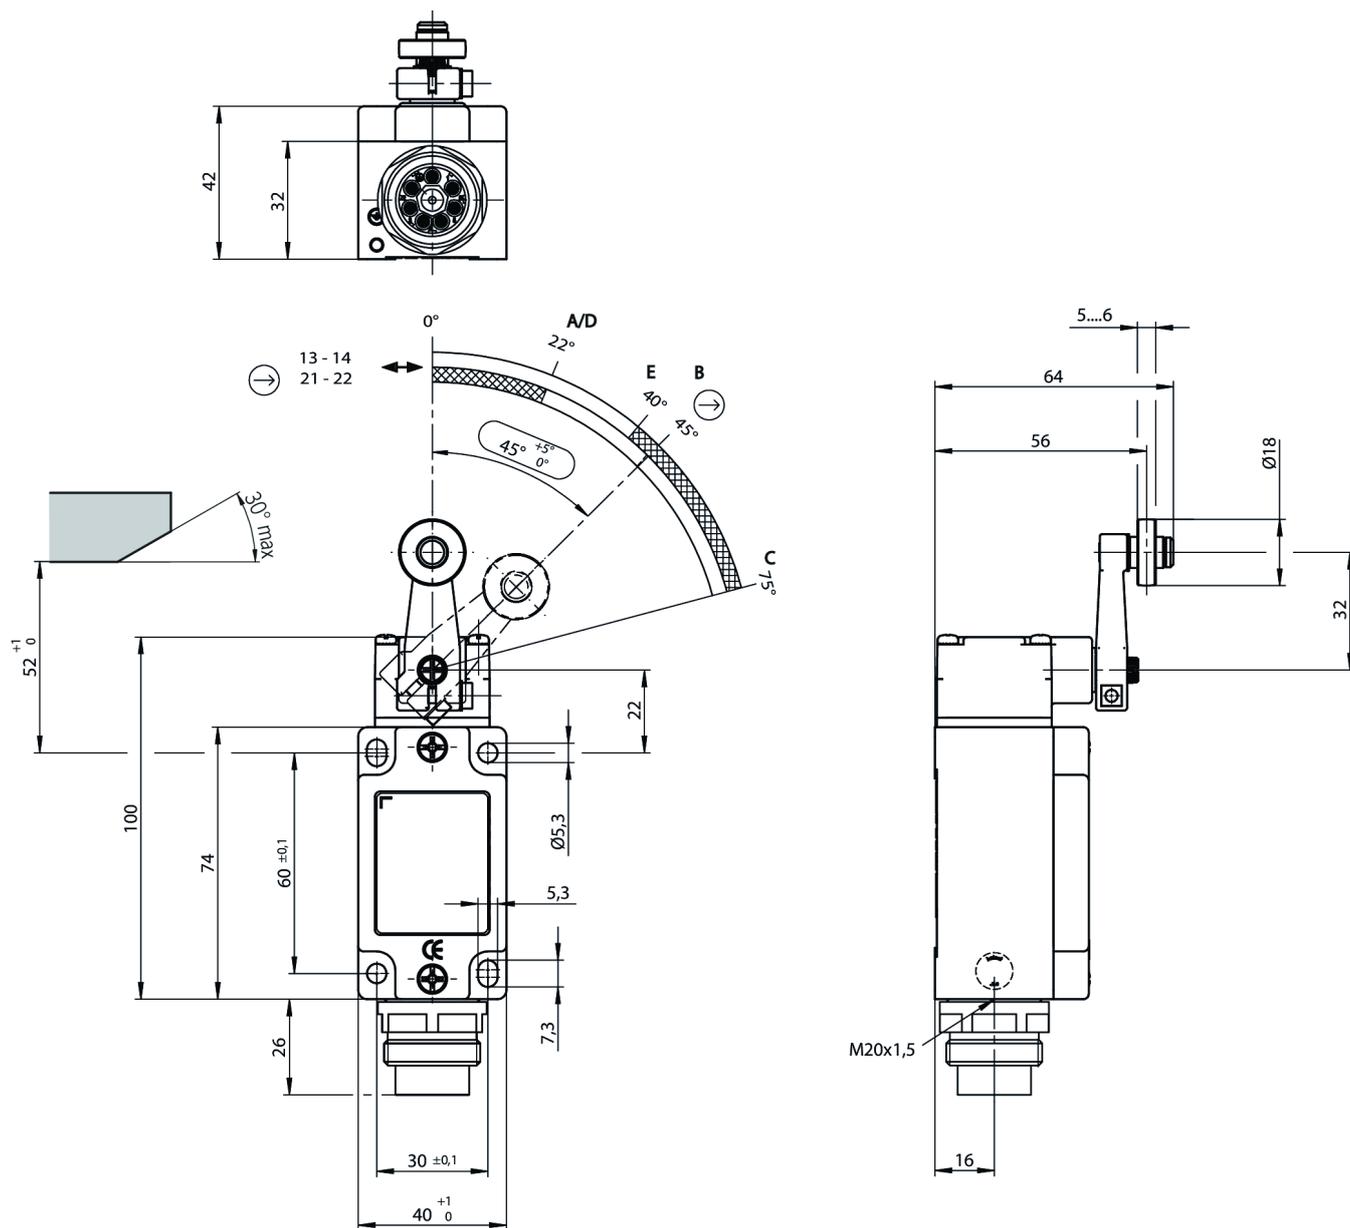

A=Operating point (NC contact)

B=Positively driven travel

C=End position

D=Reset point

E=Operating point (NO contact)

Connection examples

