

## AE-L-CET-122609 (Order no. 122609)


### Lockout bar for CET actuator

- ▶ Prevents unintentional closing of the door
- ▶ Can be secured with padlocks
- ▶ Not suitable in combination with cover AM-C for actuator CET



The lockout bar can be used to prevent maintenance personnel from being unintentionally locked in the danger zone, for example. The lockout bar is mounted on the CET actuator when the guard is open, and it can be secured with up to 2 padlocks.

**Dimensional drawings**

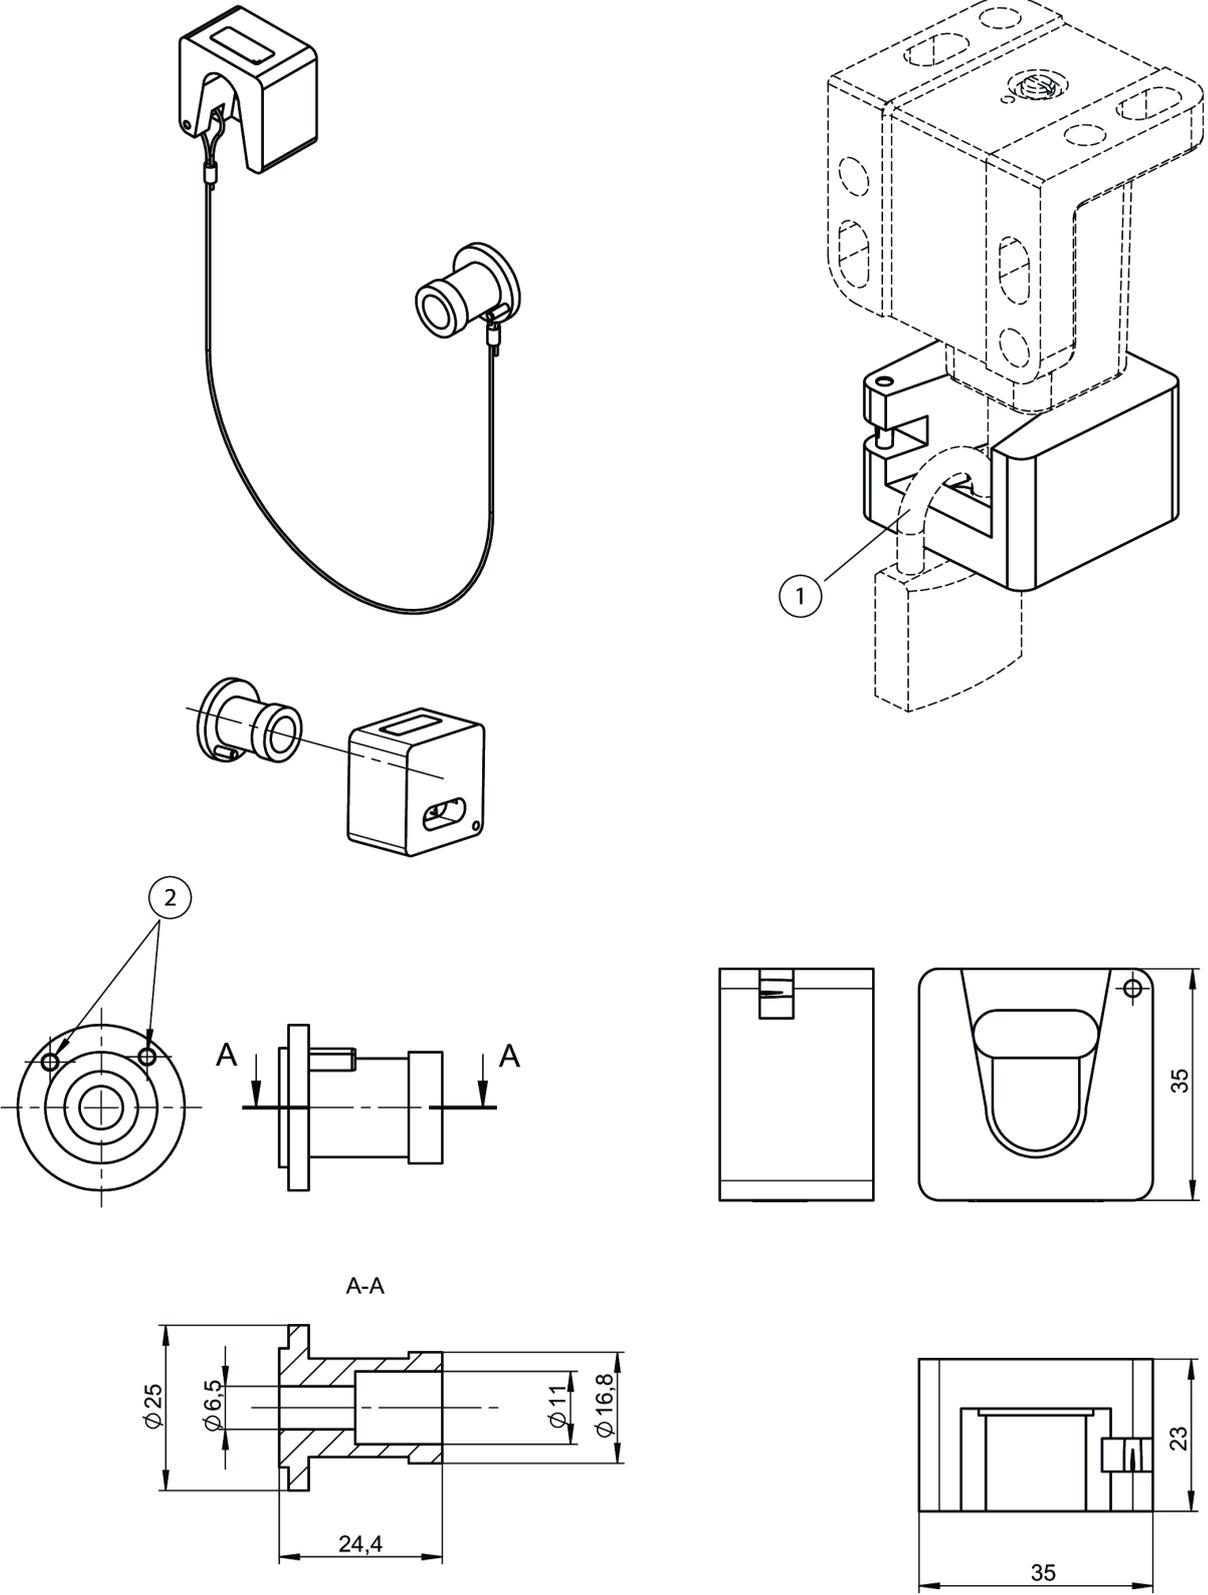

- 1 Shackle diameter: 5 mm – 6 mm
- 2 Protection against twisting for lockout bar on holder

## Technical data

### Mechanical values and environment

Dimensions	35x35x23
Storage temperature	-25 ... 70 °C
Material	Aluminum, red anodized

### Miscellaneous

Additional information	
Shackle diameter	5 mm – 6 mm
	2 padlocks can be attached
Rope length	Approx. 250 mm