

## NZ2RS-511SVM5L060GE (Order no. 098651)

### Safety switch NZ.RS, roller plunger, steel roller $\varnothing$ 12 mm, plug connector M12

- ▶ Roller plunger, steel roller  $\varnothing$  12 mm
- ▶ Version C according to EN 50041
- ▶ Plug connector M12, 5-pin
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12–60 V yellow



### Approach direction



Horizontal

Can be adjusted in 90° steps


### LED indicator

The switch has one freely assignable LED indicator.

### Switching element

511 Snap-action switching contact, 1 positively driven contact  $\ominus \rightarrow$  + 1 NO contact

## Dimensional drawings

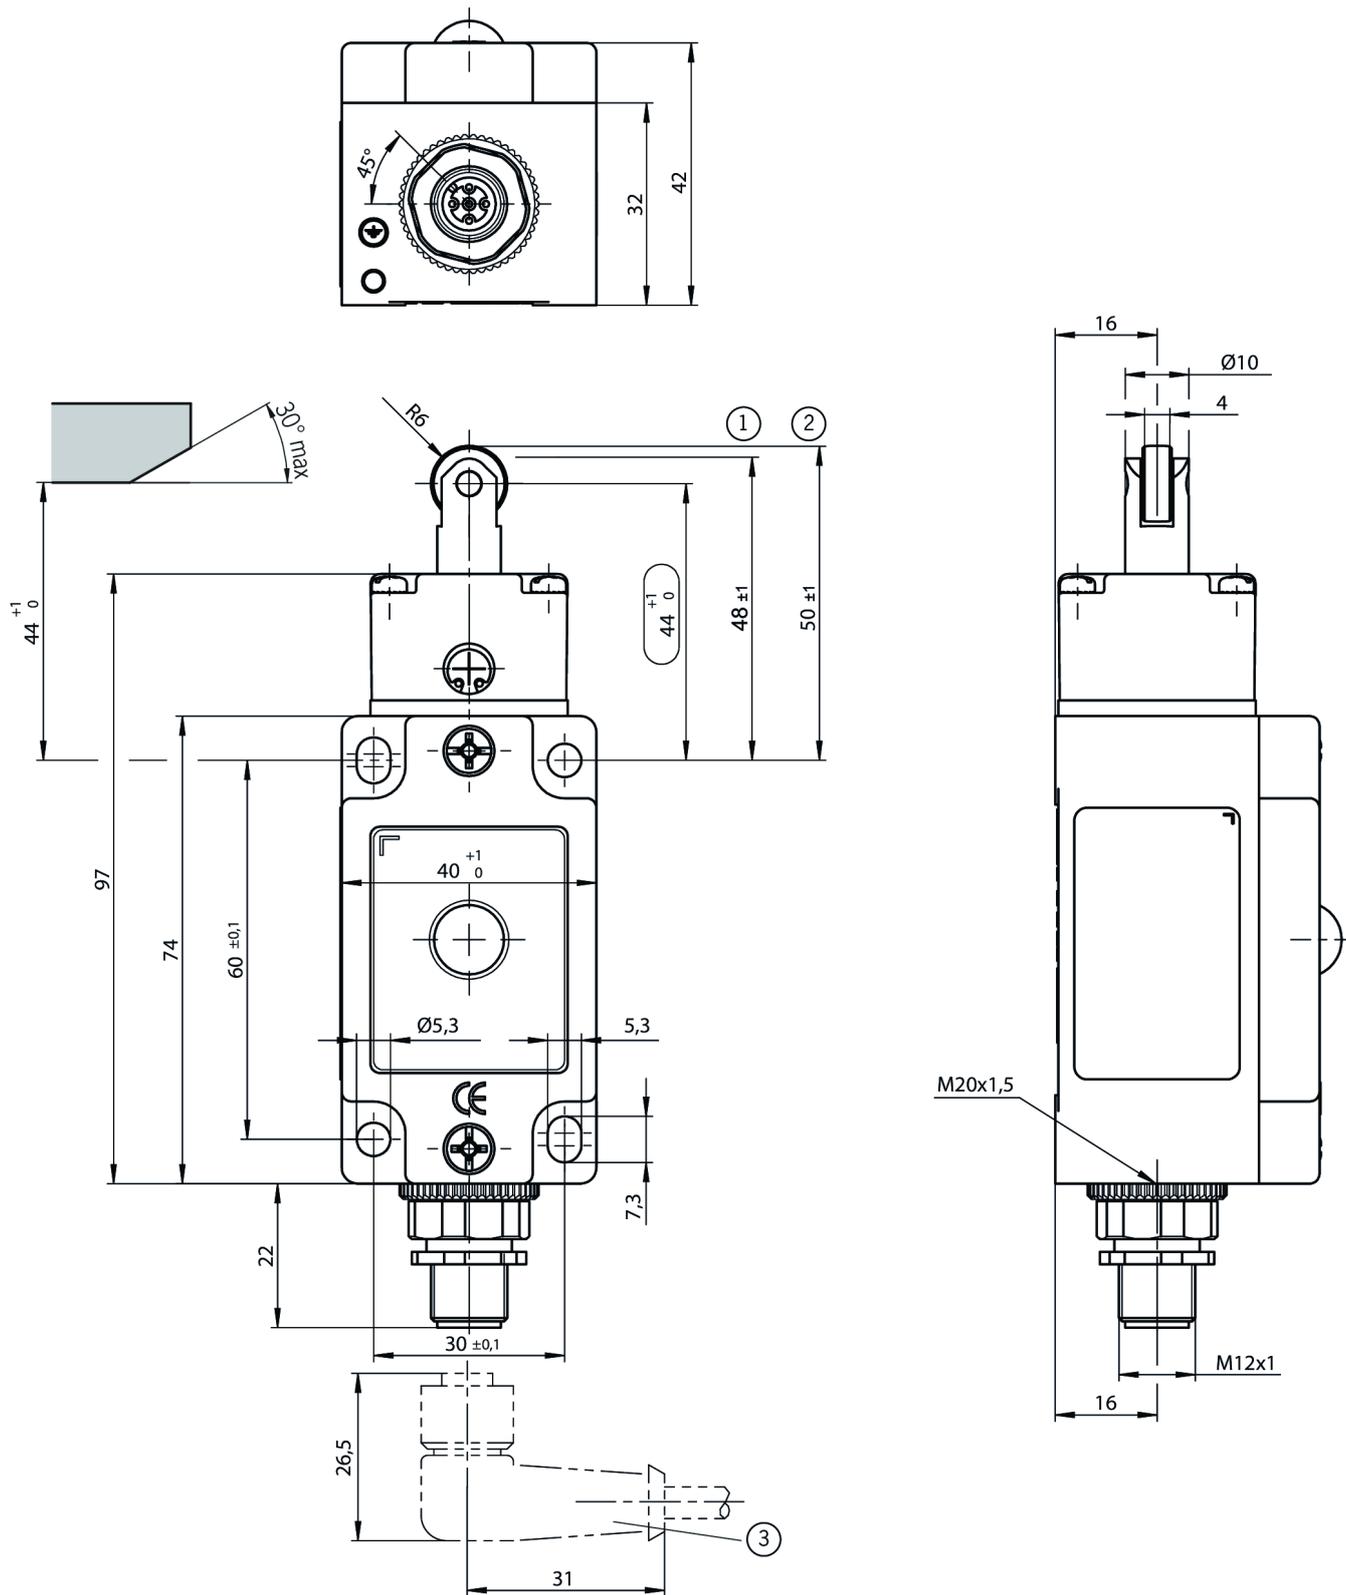

1 Operating point

2 Free position

3 Right-angle plug connector: cable outlet adjustable max. 270° Default setting for cable outlet to the right.

Connection examples

