


MGB-L1-APA-AA6A1-S5-L-114237 (Order no. 114237)

Locking module MGB-L1-APA.. (guard locking by spring force) with 3 pushbuttons, M12 for enabling switch, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ 3 pushbuttons (illuminated, wh, ye, bu and printed)
- ▶ With plug connector RC18
- ▶ With plug connector M12 for enabling switch
- ▶ Unicode

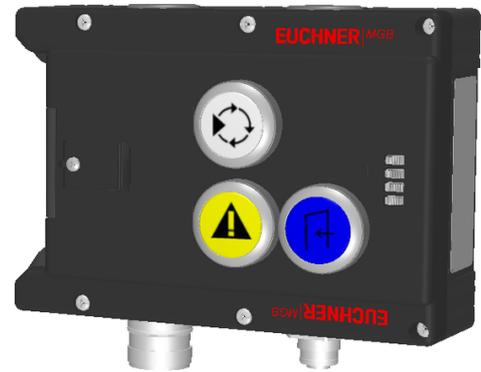

Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OT Bolt tongue inserted into the evaluation module

OI Diagnostics; there is a fault

Pushbuttons

S2 1 NO contact, white, illuminated and printed



S3 1 NO contact, yellow, illuminated and printed

S4 1 NO contact, blue, illuminated and printed

Connection for enabling switch

The device has an M12 plug connector for the direct connection of an enabling switch (e.g. ZSA, order no.: 110560).

Dimensional drawings

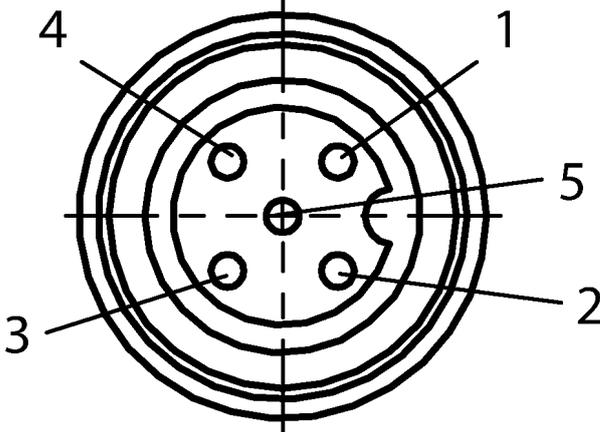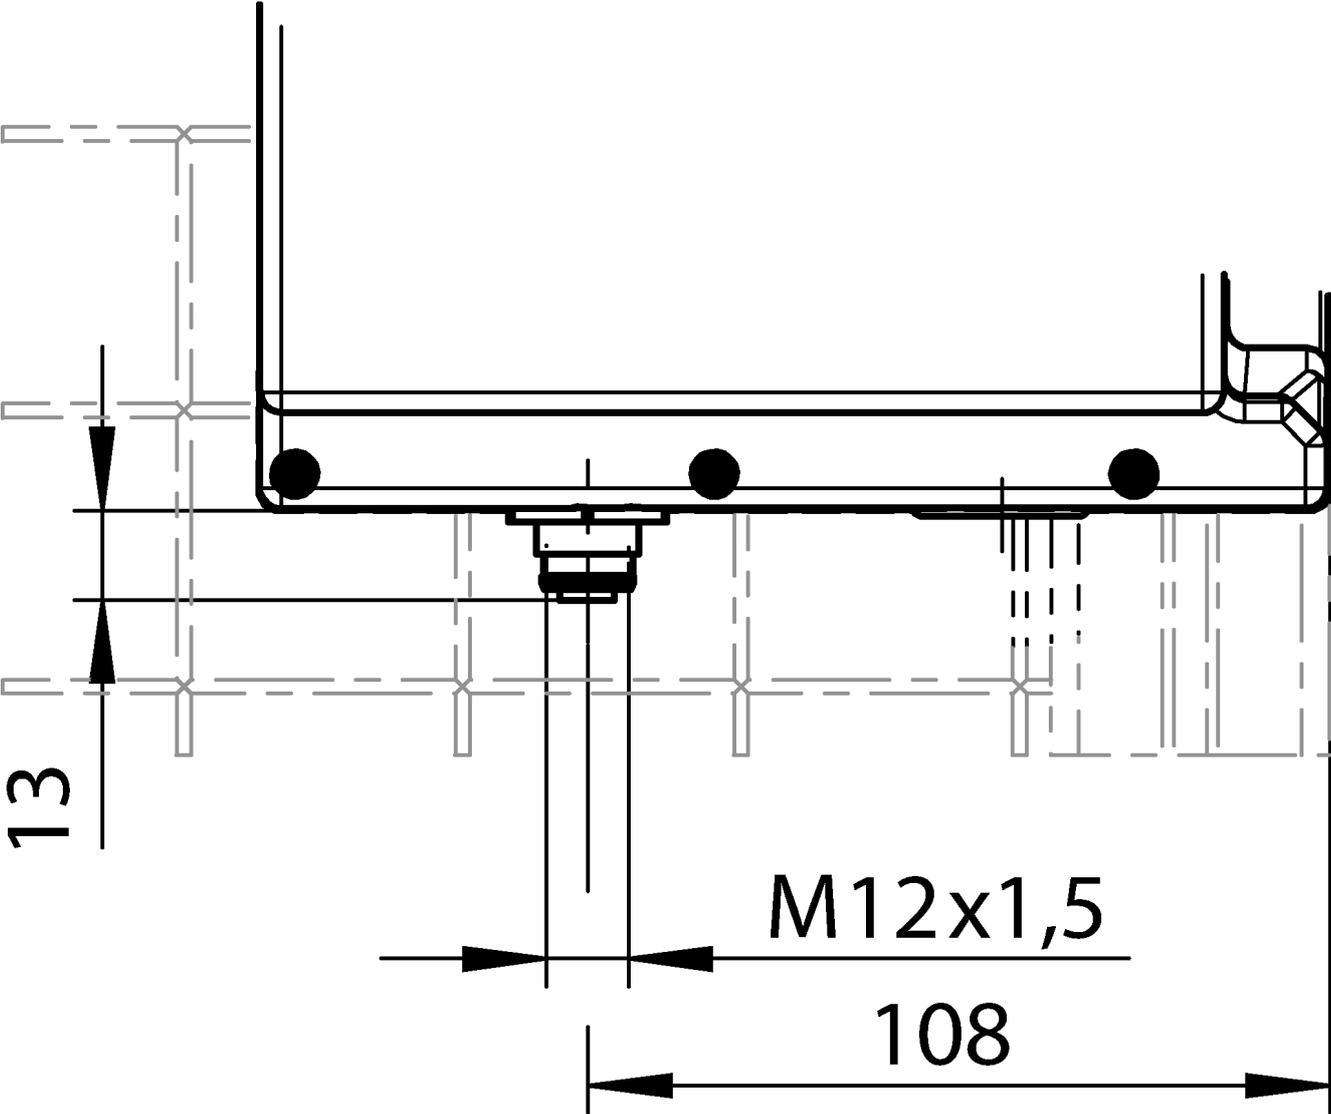

Dimensional drawings

