


MGB-L2-ARA-AD3A1-S1-L-110861 (Order no. 110861)

Locking module MGB-L2-ARA..., (guard locking by solenoid force) with 3 pushbuttons, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ 1 pushbutton (illuminated, bu)
- ▶ 1 pushbutton (illuminated, with button labeling "Unlocked," wh)
- ▶ 1 pushbutton (illuminated, with button labeling "Locked," wh)
- ▶ With plug connector RC18
- ▶ Unicode

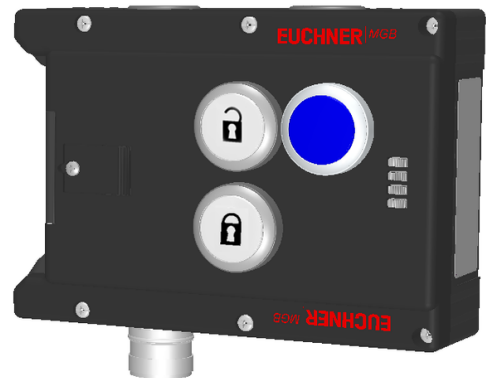

Guard locking type

MGB- The locking arm is held in the locked position by solenoid force and is unlocked by spring force
L2... when the solenoid is switched off (open-circuit current principle, electrically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.


Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

Pushbuttons

- S1 1 NO contact, blue, illuminated
- S2 1 NO contact, white, illuminated (symbol: unlocked)
- S3 1 NO contact, white, illuminated (symbol: locked)

Dimensional drawings

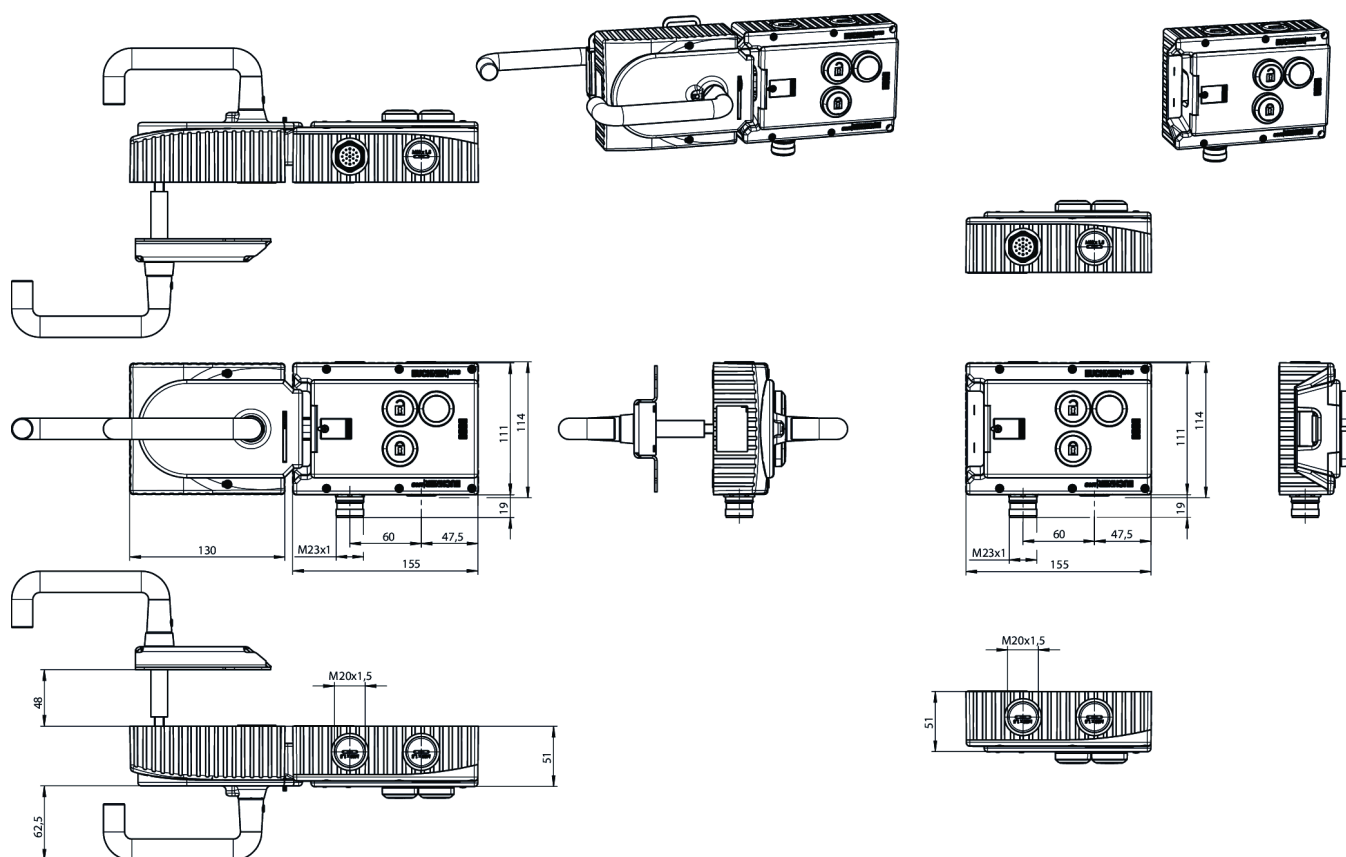

Dimensional drawings

