


NZ2WO-528L060 (Order no. 091279)

Safety switch NZ.WO, rounded plunger, plug connector M26 (SR6)

- ▶ Rounded plunger
- ▶ Version B according to EN 50041 (hardened)
- ▶ Plug connector M26 (SR6), 6-pin + PE
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ LED indicator: AC/DC 12-60 V red



Approach direction



Horizontal and vertical
Can be adjusted in 90° steps


Switching element

528H Slow-action switching contact 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

LED indicator

The switch has one freely assignable LED indicator.

Dimensional drawings

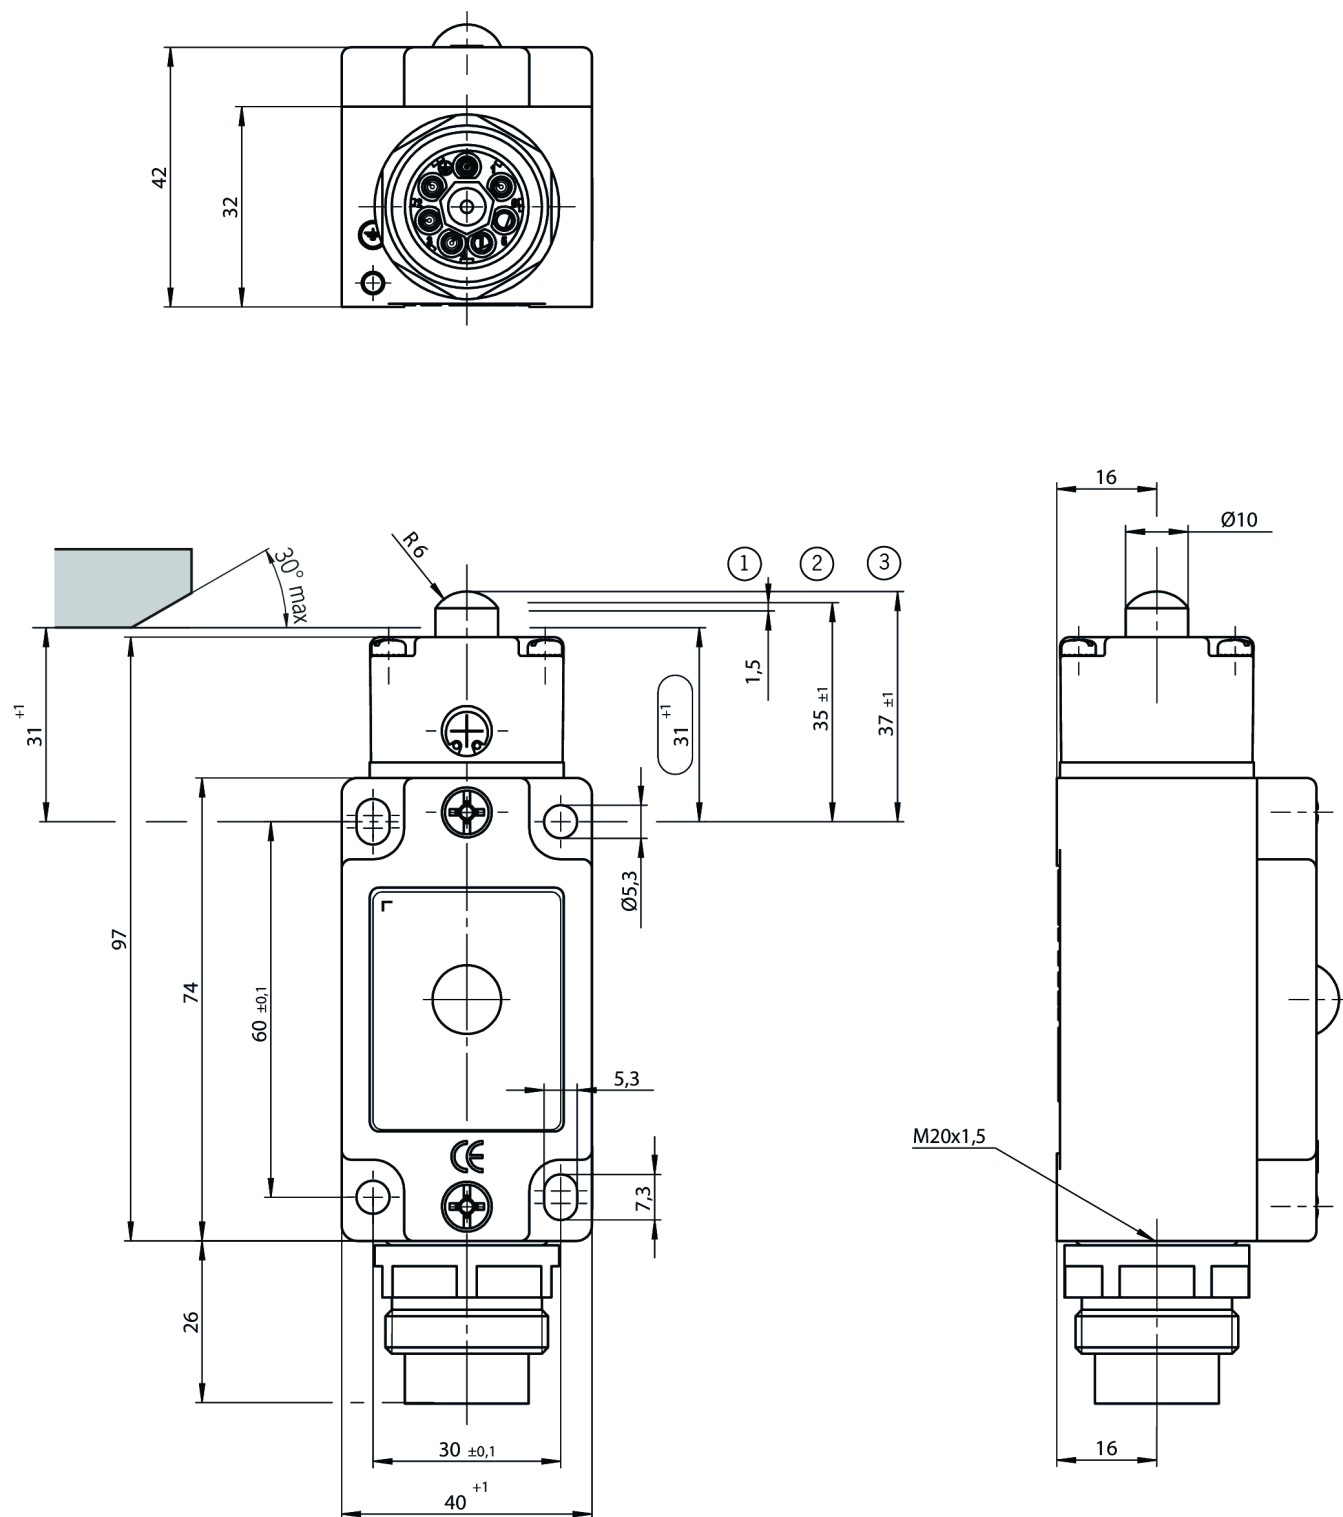

- 1 Operating point NO contact
- 2 Operating point NC contact
- 3 Free position

Connection examples

