

CIA3PL1G08 (Order no. 091875)

Read-only interface adapter CIA3PL1G08


- ▶ Parallel interface
- ▶ In combination with read head CIT3ASX1N12ST
- ▶ Rail mounting



Attention:

- ▶ The connecting cable to the control system is allowed to be max. 15 m long.
- ▶ On the use of a screened cable the connecting cable to the read head is allowed to be max. 15 m long.
- ▶ It is only ever possible to connect 1 read head per interface adapter.

Dimensional drawings

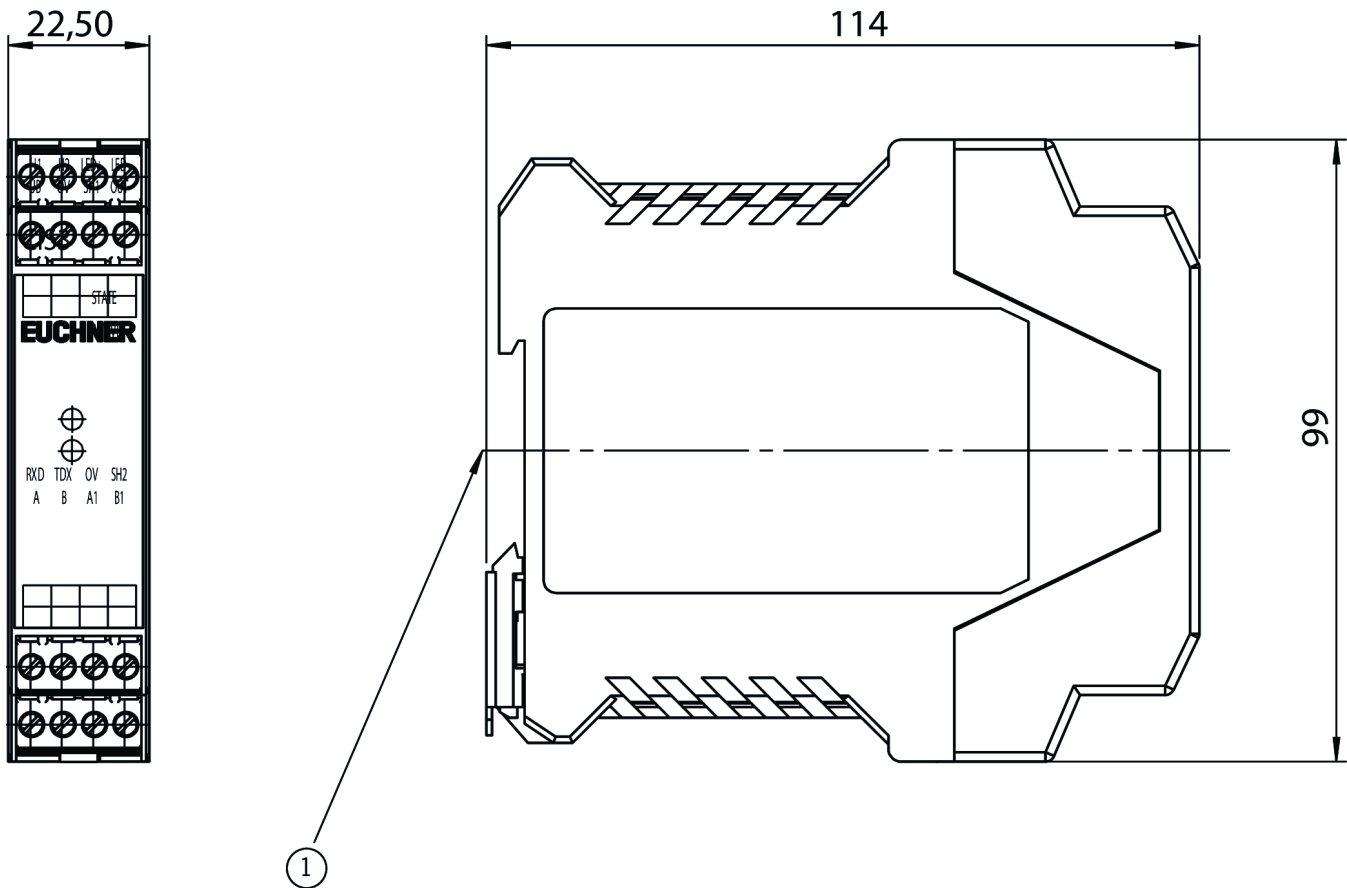

1 Suitable for 35 mm mounting rail according to DIN 46277

Connection examples

Bezeichnung	Beschreibung	Aderfarbe
H1	Antenne vom Lesekopf	BN
H2	Antenne vom Lesekopf	WH
LED +	LED vom Lesekopf	YE
LED -	LED vom Lesekopf	GN
SH	Schirm vom Lesekopf	BK

Connection examples

Bezeichnung	Beschreibung
0V/GND	Masse, DC 0 V
24 V/U _B	Spannungsversorgung, DC 24 V
A	Ausgang Datenleitung A
B	Ausgang Datenleitung B
C	Ausgang Datenleitung C
D	Ausgang Datenleitung D
SKIP	Eingang Datentakt
STROBE 1	Ausgang Datenträger aktiv
RST	Eingang RESET