


RADIUSBETAETIGER-Z-O (Order no. 057950)

Hinged actuator, top, for safety switches NZ.VZ, NZ.VZ.VS and TZ

- ▶ Two stainless-steel safety screws per actuator

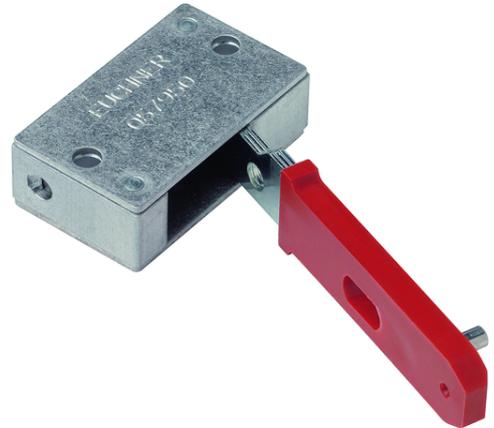


Hinged actuators

For door radii less than 1000 mm a hinged actuator should be used. The spring action movement of the actuator prevents damage due to the actuator jamming in the actuator head. Depending on the movement of the guard, the actuator must be selected for left/right or top/bottom.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

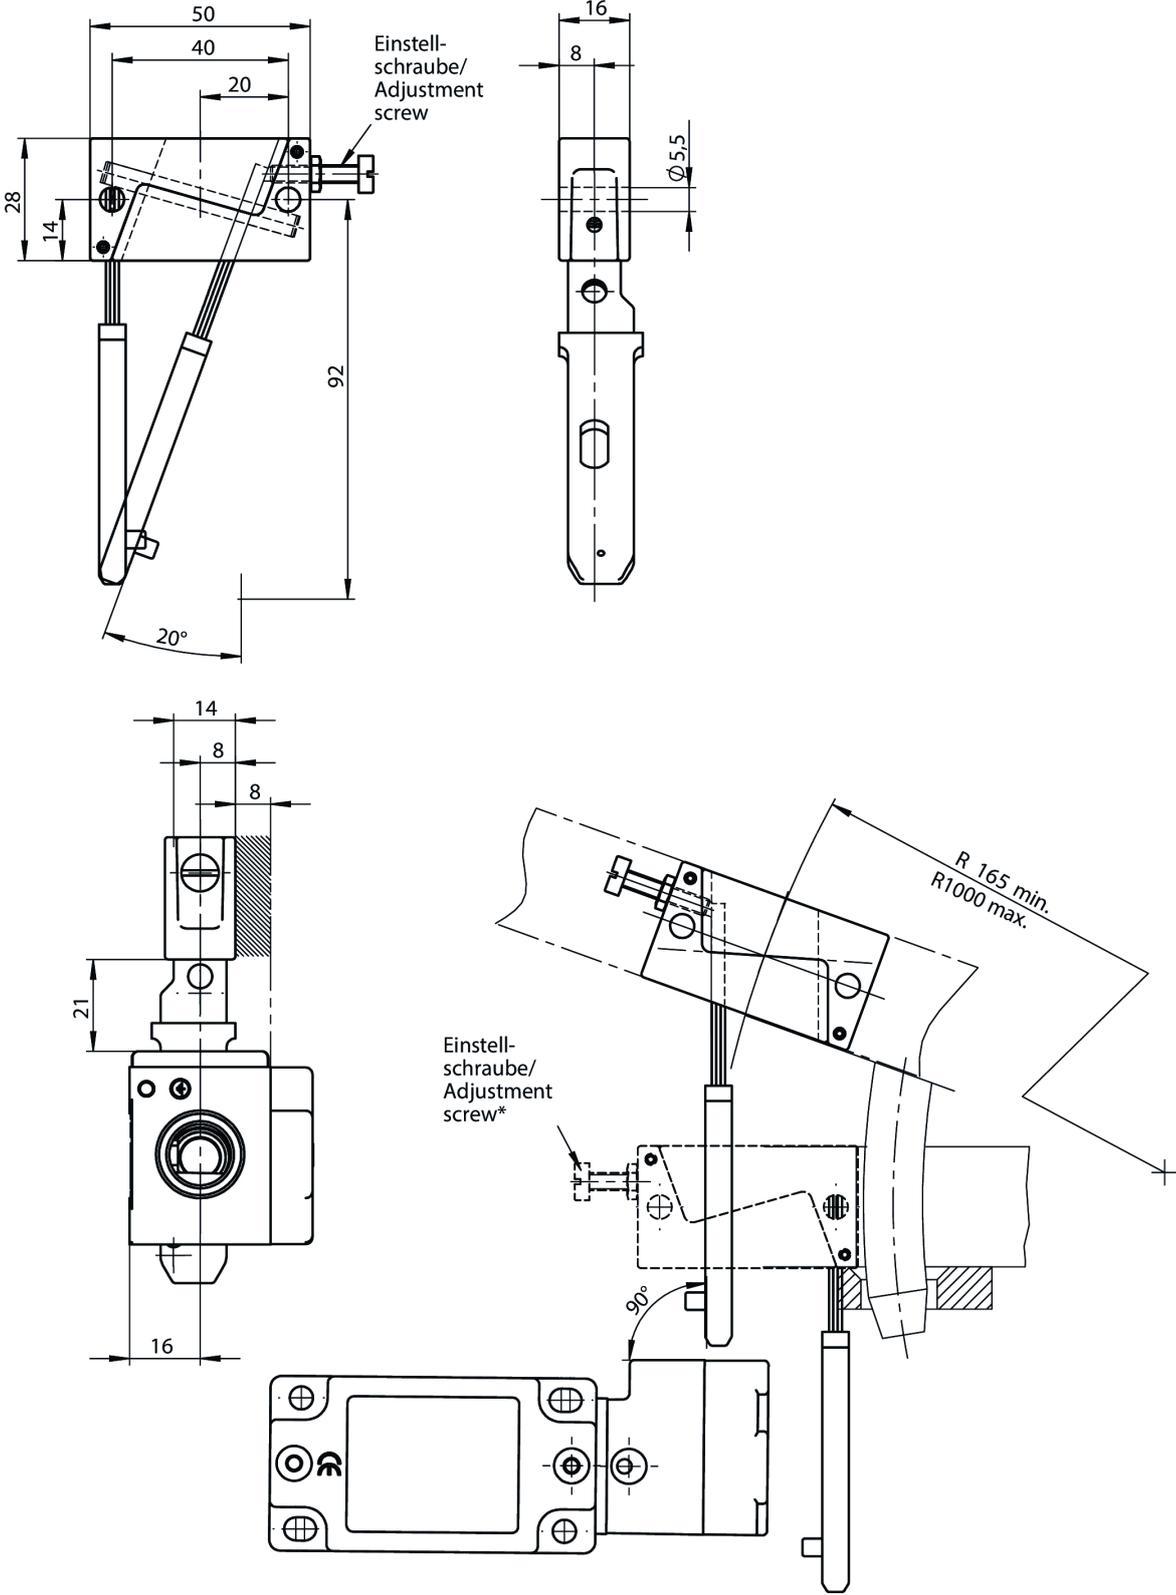

Technical data

Approvals



Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Overtravel	max. 4 mm
------------	-----------

Door radius	min. 165 mm
-------------	-------------

Material

Screw	Stainless steel
-------	-----------------

Actuator	Galvanized steel
----------	------------------

Sheath	Plastic
--------	---------

Miscellaneous

Usability of insertion funnel	No
-------------------------------	----