

AE-B-A1-02,0-F-097747 (Order no. 097747)

Wire front release (bowden)


- ▶ Can be used as escape release or emergency release
- ▶ automatic return
- ▶ Sheath length 2 m (rope length 6 m)



Flexible routing of the pull wire permits release of the guard locking in inaccessible installation situations.

- ▶ Use as emergency unlocking if the safety switch is mounted in an inaccessible position
- ▶ Use as escape release for unlocking the guard locking from the danger zone
- ▶ Can be retrofitted on all safety switches of series CTP/CTA/TP/STP/STA

Dimensional drawings

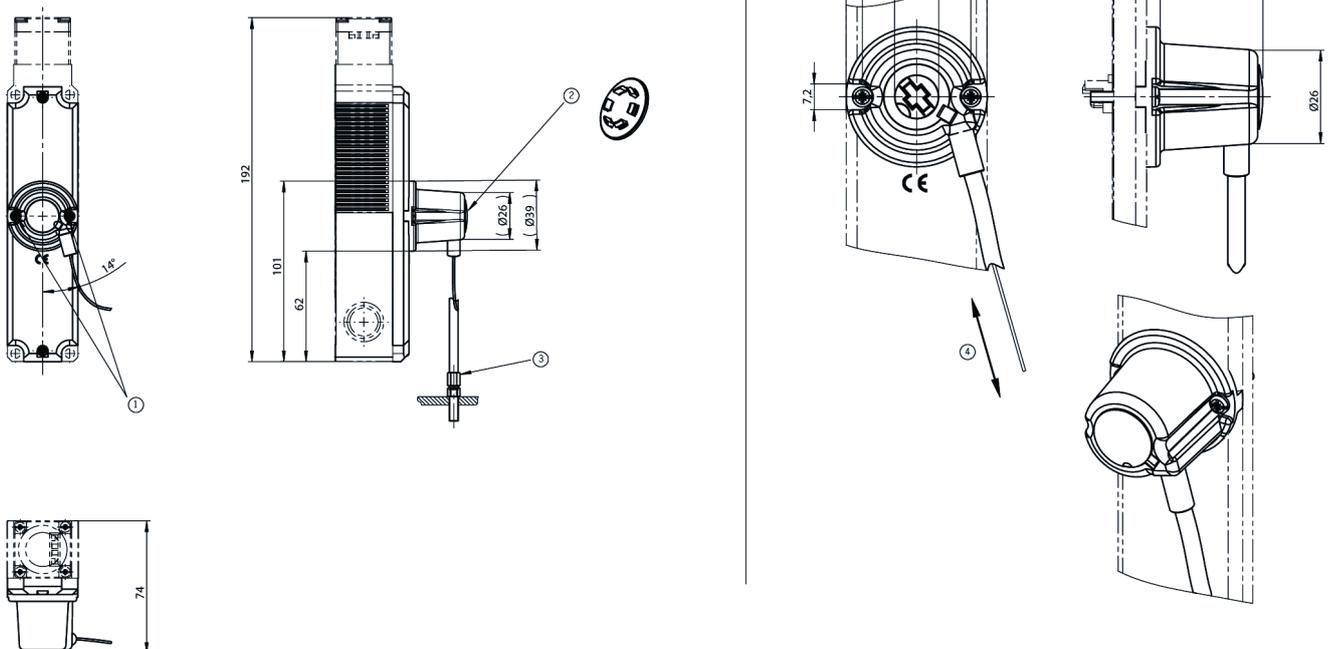

1 Mounting by means of the screw included, length: 17mm!

2 Cover

3 Adjusting screw M5x17.5 for fixing the hose cable (included).

4 A stroke of min. 17 mm is necessary for safe release.

Technical data

Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Sheath length

Hose nozzle	2 m
-------------	-----

Rope length

Pull wire	6 m
-----------	-----

Material

Housing	Plastic
---------	---------

Miscellaneous

Detent mechanism	no, resetting
------------------	---------------