


RADIUSBETAETIGER-S-OU-LN (Order no. 096697)

Hinged actuator S, top/bottom, for safety switch SGA/SGP/STA/STP/STM for insertion funnel

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator
- ▶ For top-hinged and bottom-hinged doors

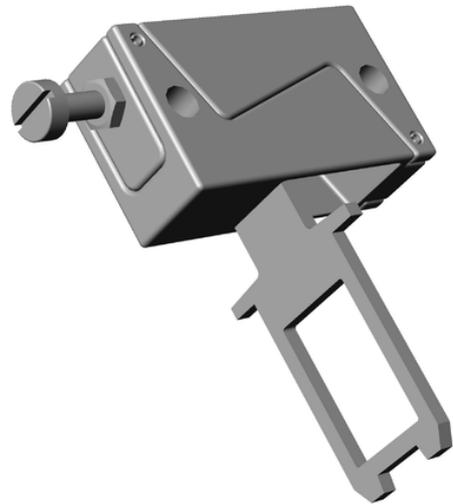


Notice

S-...-SN actuators must not be used in conjunction with insertion funnels. S-...-LN actuators must be used for insertion funnels.

Hinged actuators

For door radii less than 1000 mm a hinged actuator should be used. The spring action movement of the actuator prevents damage due to the actuator jamming in the actuating head. Depending on the movement of the guard, the actuator must be selected for left/right or top/bottom.

Dimensional drawings

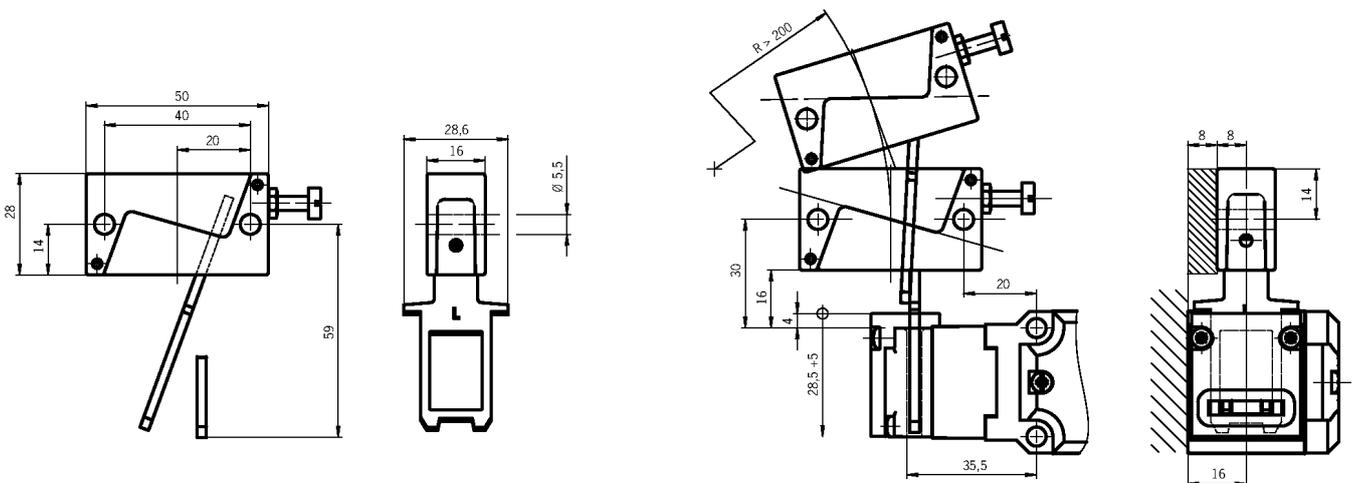

Technical data

Approvals



Mechanical values and environment

Storage temperature	-25 ... 70 °C
---------------------	---------------

Overtravel	max. 5 mm
------------	-----------

Door radius	min. 200 mm
-------------	-------------

Material

Actuator	Stainless steel
----------	-----------------

Screw	Stainless steel
-------	-----------------

Miscellaneous

Usability of insertion funnel	Yes
-------------------------------	-----

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/096697/?#downloads-tab>