

MGB-L1-ARA-AN3A1-S1-R-157848 (Order no. 157848)

Locking module MGB-L1-ARA... (guard locking by spring force) with 2 pushbuttons, key-operated rotary switch, IP54, RC 18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Key-operated rotary switch (form L, 90°)
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ With plug connector RC18
- ▶ Unicode
- ▶ IP54



Guard locking type

MGB- The locking arm is held in the locked position by spring force and is unlocked by solenoid force
L1... (closed-circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OD ON when the door is closed

OT Bolt tongue inserted into the evaluation module

OL Guard locking solenoid in locked position

OI Diagnostics; there is a fault

Key-operated rotary switch

S1 Key-operated rotary switch with 2 positions (form L, 90°). The key latches in both positions and can be removed in both positions.

Pushbuttons


S2 1 NO contact, illuminated

S3 1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

Dimensional drawings

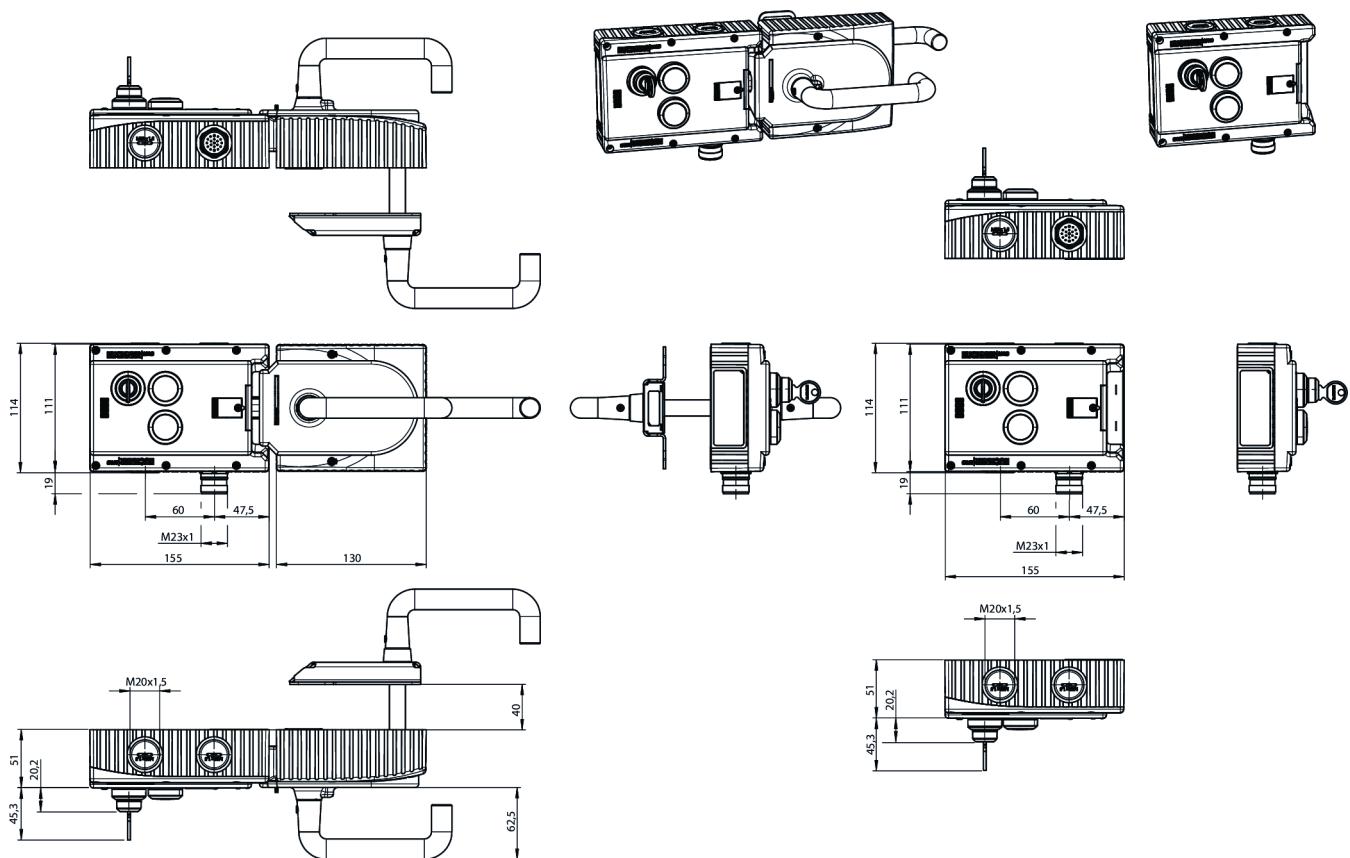

Connection examples

