

C-M23F19-19XDIFPU01,5-MA-092906 (Order no. 092906)

Connecting cable with plug connector M23 with option C1825, 1.5 m, angled

- ▶ M23 plug connector, 18-pin + PE
- ▶ Angled plug connector
- ▶ Cable exit C (left)
- ▶ PUR cable
- ▶ Cable length 1.5 m
- ▶ With flying lead
- ▶ Cores color-coded



Connector assignment

Plug connector (view of connection side)	Pin	Cross-section	Conductor coloring
	1	0.5 mm ²	VT
	2	0.5 mm ²	RD
	3	0.5 mm ²	GY
	4	0.5 mm ²	RDBU
	5	0.5 mm ²	GN
	6	1.0 mm ²	BU
	7	0.5 mm ²	GYPK
	8	0.5 mm ²	GNWH
	9	0.5 mm ²	YEWH
	10	0.5 mm ²	GYWH
	11	0.5 mm ²	BK
	12	1.0 mm ²	GNYE
	13	0.5 mm ²	PK
	14	0.5 mm ²	BNGY
	15	0.5 mm ²	BNYE
	16	0.5 mm ²	BNGN
	17	0.5 mm ²	WH
	18	0.5 mm ²	YE
	19	1.0 mm ²	BN

Dimensional drawings

CEM-C40



CTP / CTA



CET



Bei der gezeigten Einbaulage des Geräts gilt:


Leitungsabgang C
(links)

Leitungsabgang A
(rechts)



- 1 The following applies to the device installation position shown: cable outlet C (left)
- 2 The following applies to the device installation position shown: cable outlet A (right)

Dimensional drawings

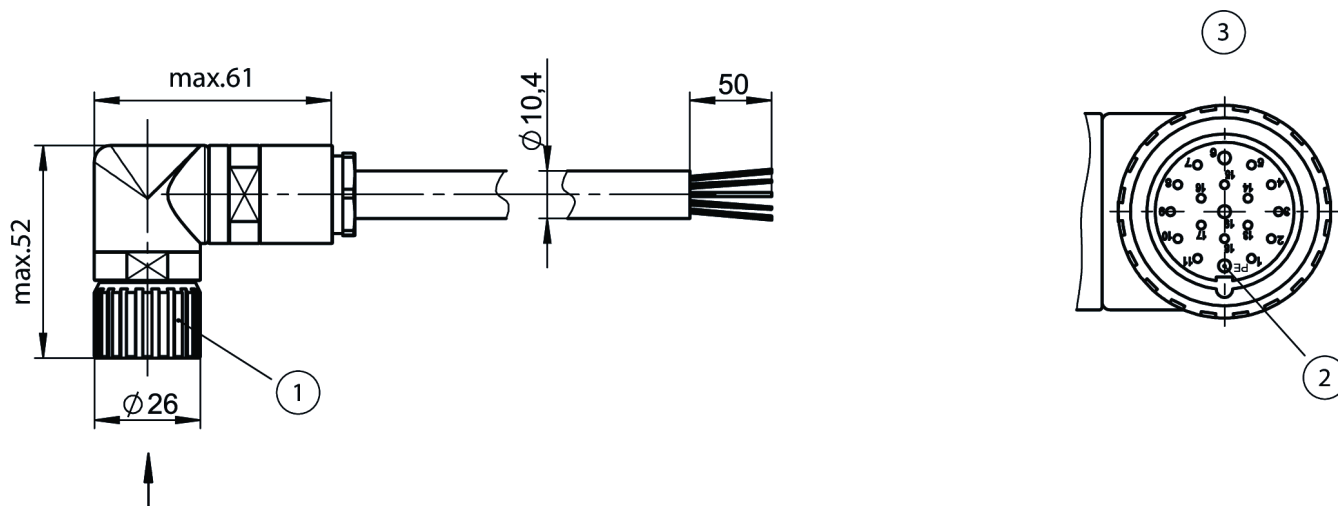

- 1 Female plug with union nut M23, 19-pin, with shield spring
- 2 PIN 12 (PE with shield spring)
- 3 Terminal assignment as seen from the connection side cable outlet C