


STA-TW-3A-4121AC024L024M (Order no. 106379)

Safety switch STA-TWIN with door monitoring contact

- ▶ Two actuating heads made of metal
- ▶ Simultaneous monitoring of two safety doors
- ▶ Auxiliary release on the front
- ▶ With door monitoring contact
- ▶ With LED function display



Approach direction

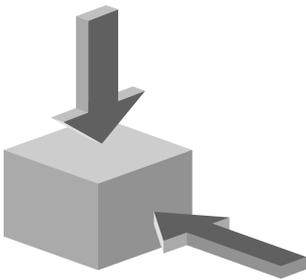

Horizontal and vertical
Can be adjusted in 90° steps

Solenoid operating voltage

- ▶ AC/DC 24 V +10%, -15%

LED function display

A function display (2 LEDs, red and green) is available for the following voltage ranges:

- ▶ AC/DC 24 V + 10%, -15%

Guard locking type

STA3 Closed-circuit current principle, guard locking by spring force. Release by applying voltage to the guard locking solenoid.


Switching element

4121 Slow-action switching contact 2 NC $\text{\textcircled{→}}$ + 1 NC/ 1 NO (door monitoring contact)

Auxiliary release

This is used for releasing the guard locking with the aid of a tool. To protect against tampering, the auxiliary release is sealed with sealing lacquer.

Functional drawings

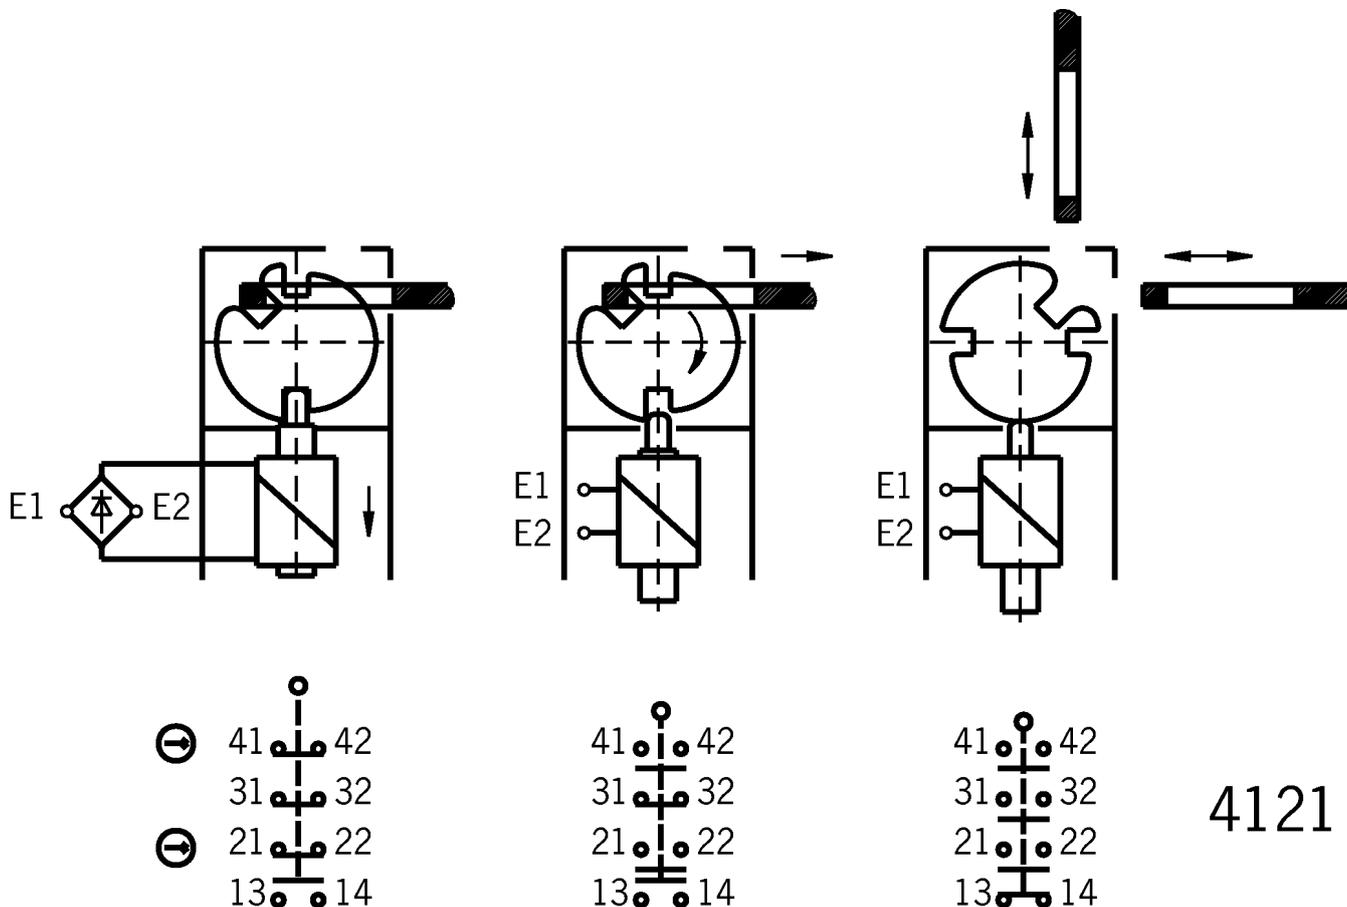

4121

Dimensional drawings

