


STUFENSCHALTER MIT PLATINE 1 AUS 3 (Order no. 097027)

Selector switch 1 of X

Dimensional drawings

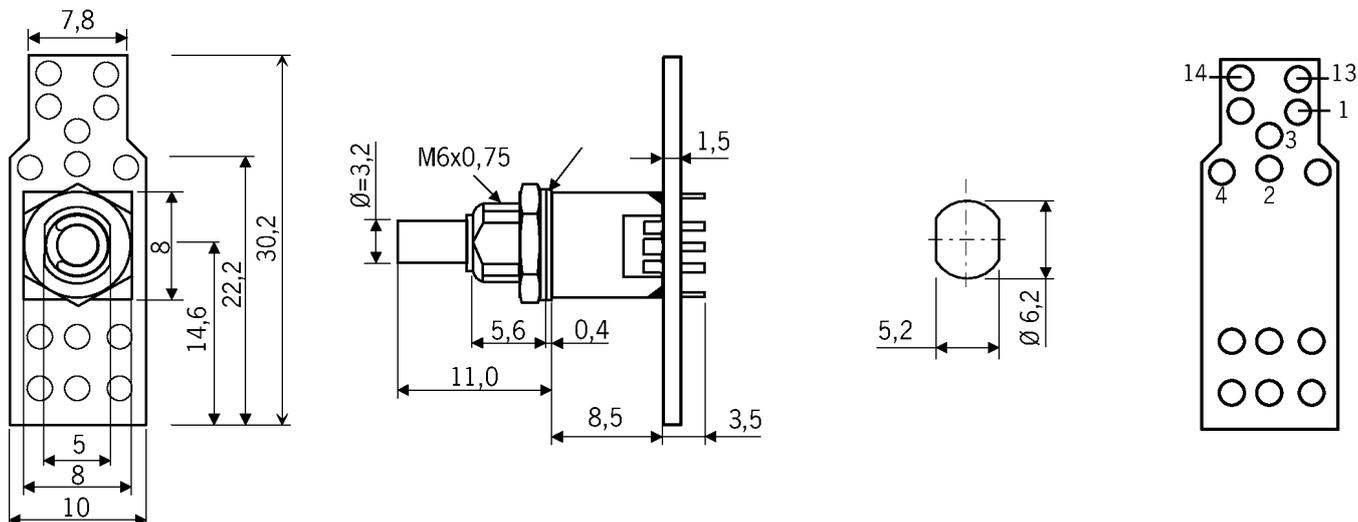

Connection examples

1 aus 2			1 aus 3				1 aus 4				
Rast- stellung	Ausgang		Rast- stellung	Ausgang			Rast- stellung	Ausgang			
	1	2		1	2	3		1	2	3	4
1	1	0	1	1	0	0	1	1	0	0	0
2	0	1	2	0	1	0	2	0	1	0	0
			3	0	0	1	3	0	0	1	0
							4	0	0	0	1

Technical data

Electrical connection values

Output code	1 of 3
Contact resistance	max. 80 mΩ
Switching capacity (VA)	max. 0.2 VA
Switching voltage	AC/DC max. 25 V
Switching current	0.1 ... 50 mA

Mechanical values and environment

Connection type	Soldered connection on printed circuit board
Storage temperature	-25 ... 70 °C
Mechanical life	0.05 x 10 ⁶
Mounting cut-out	6,2 x 5,2 mm
Detent positions per revolution	3 break-before-make
Detent angle	30
Degree of protection	IP67 (in the installed state)
Ambient temperature	-25 ... 70 °C

Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/097027/?#downloads-tab>