


## MGB-L2H-ARA-R-105786 (Order no. 105786)

### Locking set MGB-L2H-ARA... (guard locking by solenoid force) without control or indicator

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ With cable entry
- ▶ Unicode

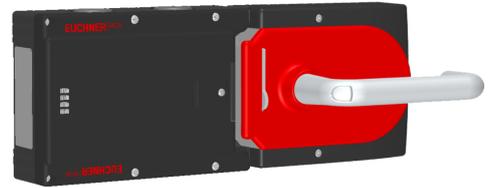

### Guard locking type

MGB-L2H-... The locking arm is held in the locked position by solenoid force and is unlocked by spring force L2... when the solenoid is switched off (open-circuit current principle, electrically locked).

### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.


### LED indicator

The LED indicator indicates all important system and status information.


### Monitoring outputs

- OD ON when the door is closed
- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault

## Dimensional drawings

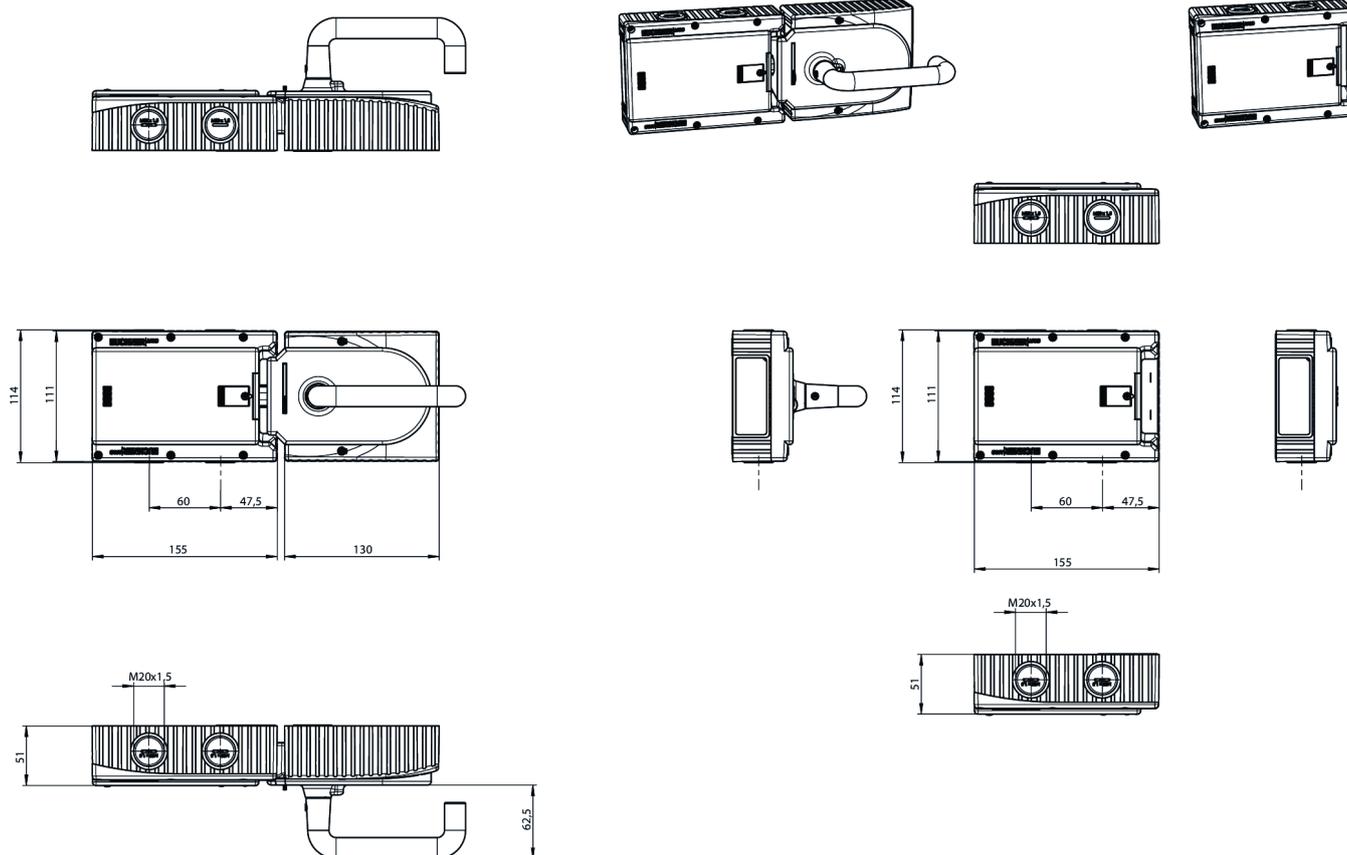

## Connection examples

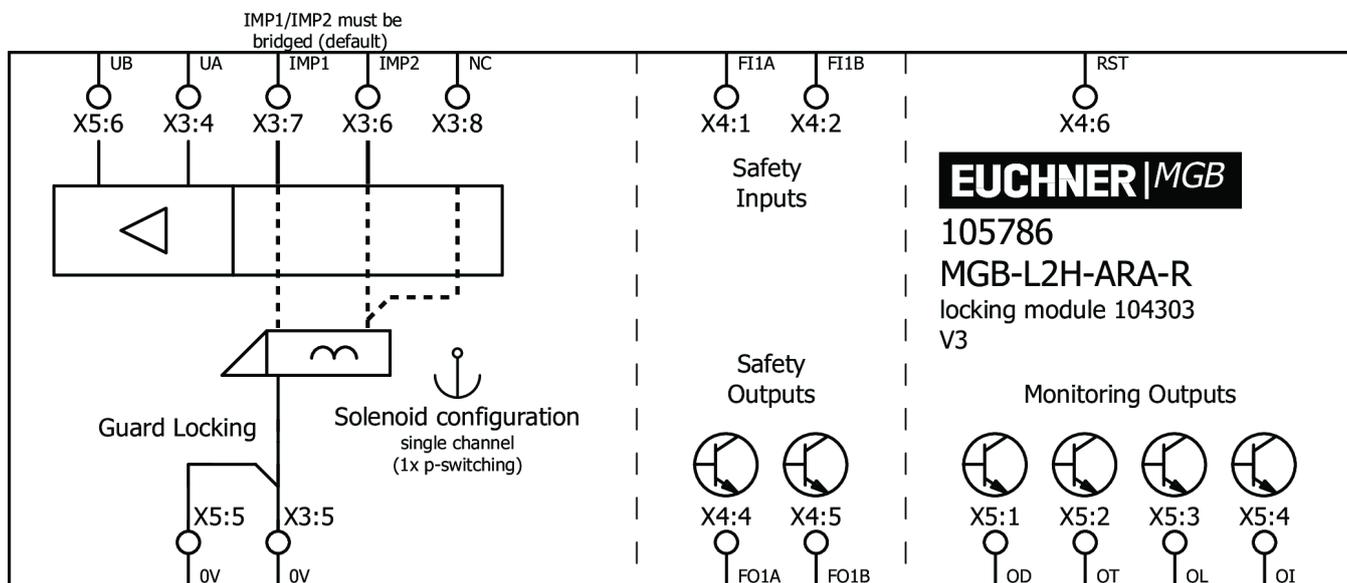

## Components



### 100464

MGB-H-AA1A1-R-100464

Handle module MGB-H-...

- ▶ Intelligent bolt tongue
- ▶ Lockout mechanism
- ▶ Door handle



### 104303

MGB-L2-ARA-AA1A1-M-104303

Locking module MGB-L2-ARA... (guard locking by solenoid force) without controls or indicators

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ With cable entry
- ▶ Unicode