


MGB-L1H-ARA-L-121414 (Order no. 121414)

Locking set MGB-L1H-ARA... (guard locking by spring force) with 2 pushbuttons, machine stop, incl. label carrier

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ Machine stop (black–silver)
- ▶ 2 pushbuttons (illuminated)
- ▶ With lens set, 6 pcs.
- ▶ incl. adhesive labels
- ▶ With cable entry
- ▶ Unicode

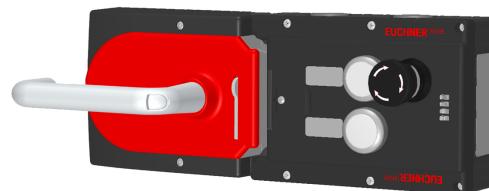

Guard locking type

MGB– The locking arm is held in the locked position by spring force and is unlocked by solenoid force
 L1... (closed–circuit current principle, mechanically locked).

Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

LED indicator

The LED indicator indicates all important system and status information.

Monitoring outputs

OD ON when the door is closed

OT Bolt tongue inserted into the evaluation module

OL Guard locking solenoid in locked position

OI Diagnostics; there is a fault

Machine stop

S1 Version as emergency stop but in black/silver, e.g. as machine stop. Important: Do not use as emergency stop.

Pushbuttons

S2 1 NO contact, illuminated

S3 1 NO contact, illuminated

Lens set

The color of the pushbuttons can be selected using the color cover set included (5 colors). Item no.: 120344 (see Accessories)

Adhesive labels

Devices with adhesive labels have pre-formed recesses. The adhesive labels enclosed (standard size 12.5 x 27 mm) can be affixed in these recesses.