

NZ2RG-528SVM5 (Order no. 090961)

Safety switch NZ.RG, roller plunger, plastic roller \varnothing 12 mm, plug connector M12

- ▶ Roller plunger, plastic roller \varnothing 12 mm
- ▶ Version C according to EN 50041
- ▶ Plug connector M12, 5-pin
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction




Horizontal

Can be adjusted in 90° steps

Switching element

528H Slow-action switching contact 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

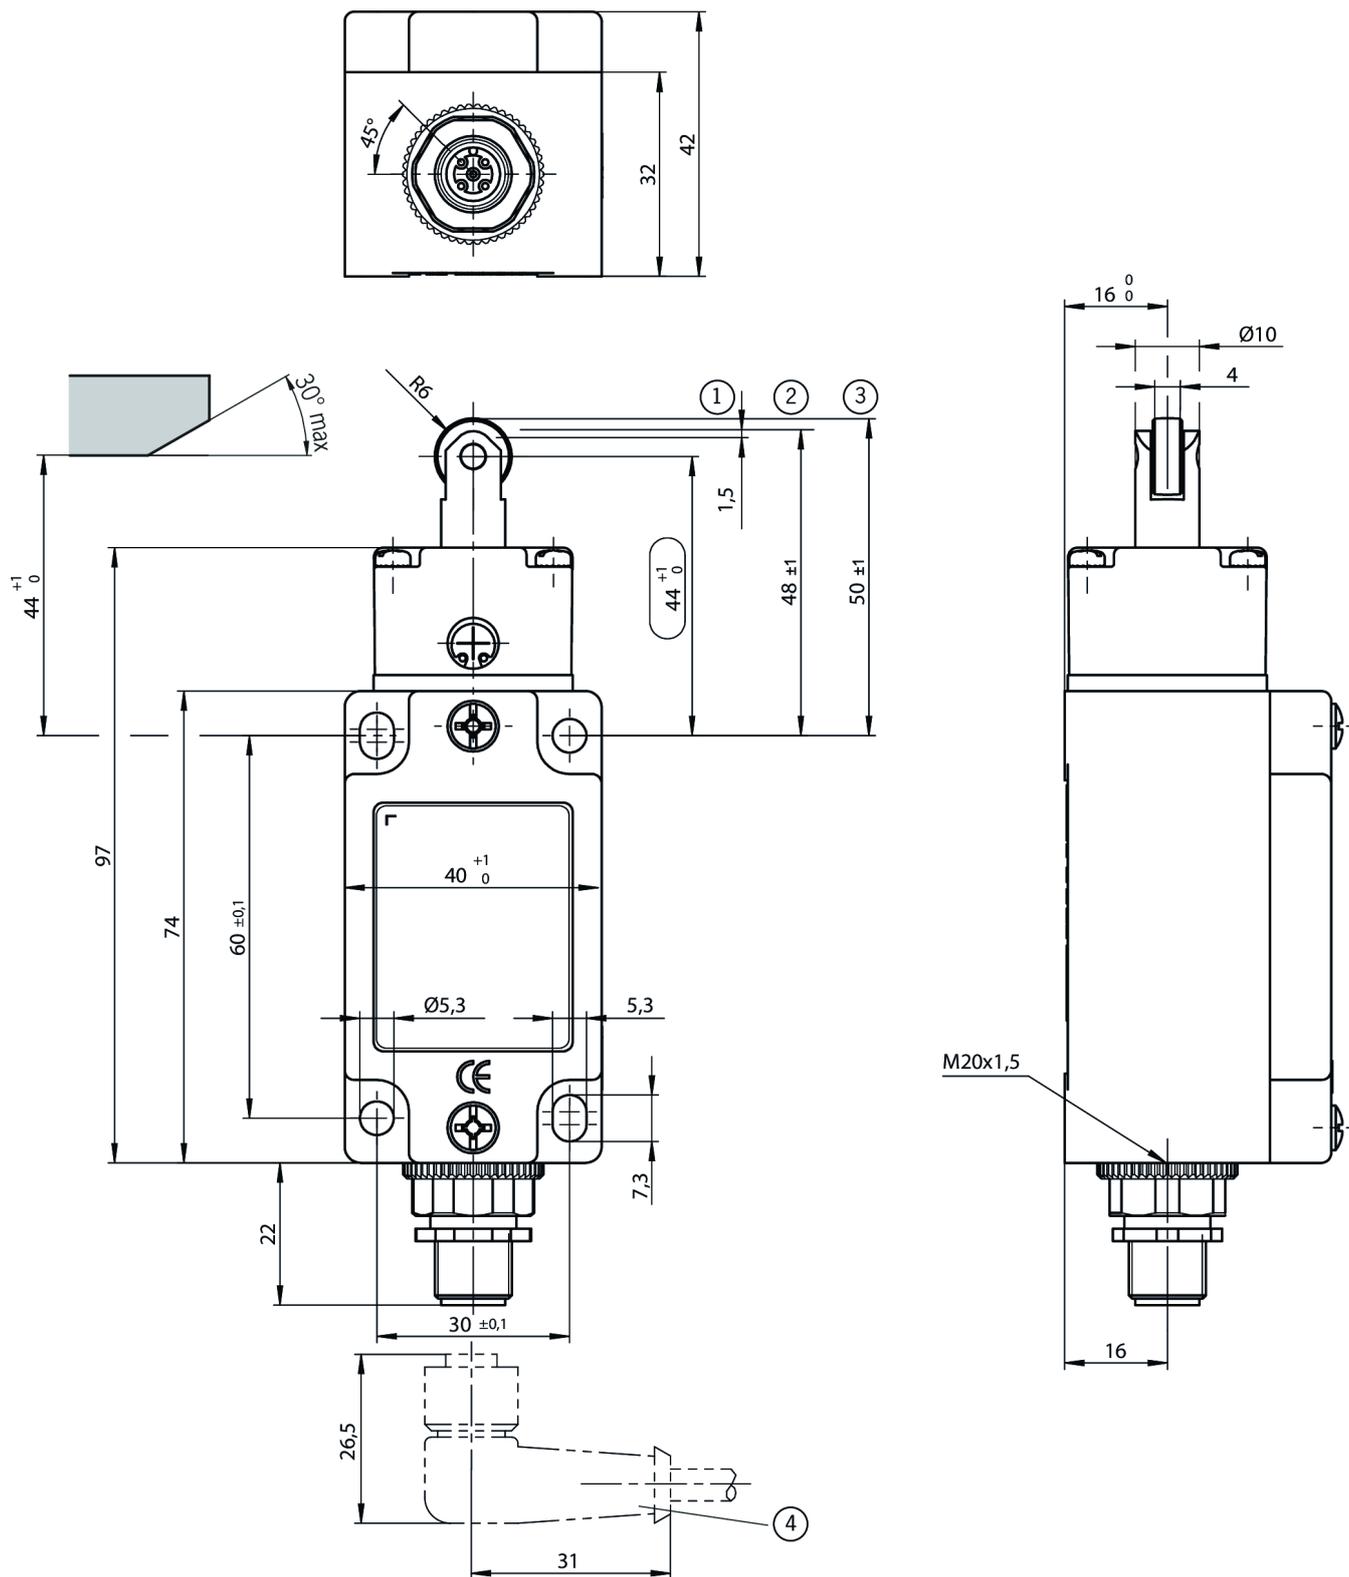

1 Operating point NO contact

2 Operating point NC contact

3 Free position

4 Right-angle plug connector: cable outlet adjustable max. 270° Default setting for cable outlet to the right.

Connection examples

