


## NOT-HALT TASTE 16MM 2 OE/ZUG (Order no. 096298)

### Emergency stop device for installation in housing ZSM/HBA/HBM

- ▶ With pull-to-reset button
- ▶ Emergency stop device according to EN ISO 13850
- ▶ EMERGENCY STOP device for housing ZSM/HBA/HBM without enabling switch ZXE, 3-stage

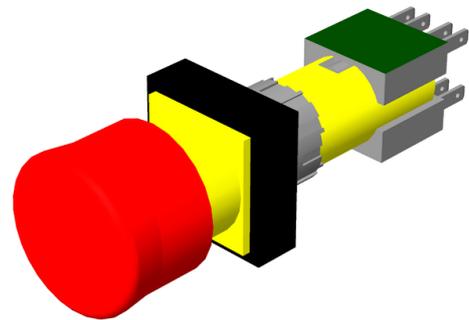


Two-channel emergency stop device (red, with pull-to-reset button) for installation in housing ZSM/HBA/HBM, for different wiring concepts.

### Notes

- ▶ The EMERGENCY STOP device engages when actuated by pressing, unlocks when pulled, and is overload proof
- ▶ Do not use with ZSM/HBA/HBM housing with 3-stage enabling switch ZXE

### Dimensional drawings

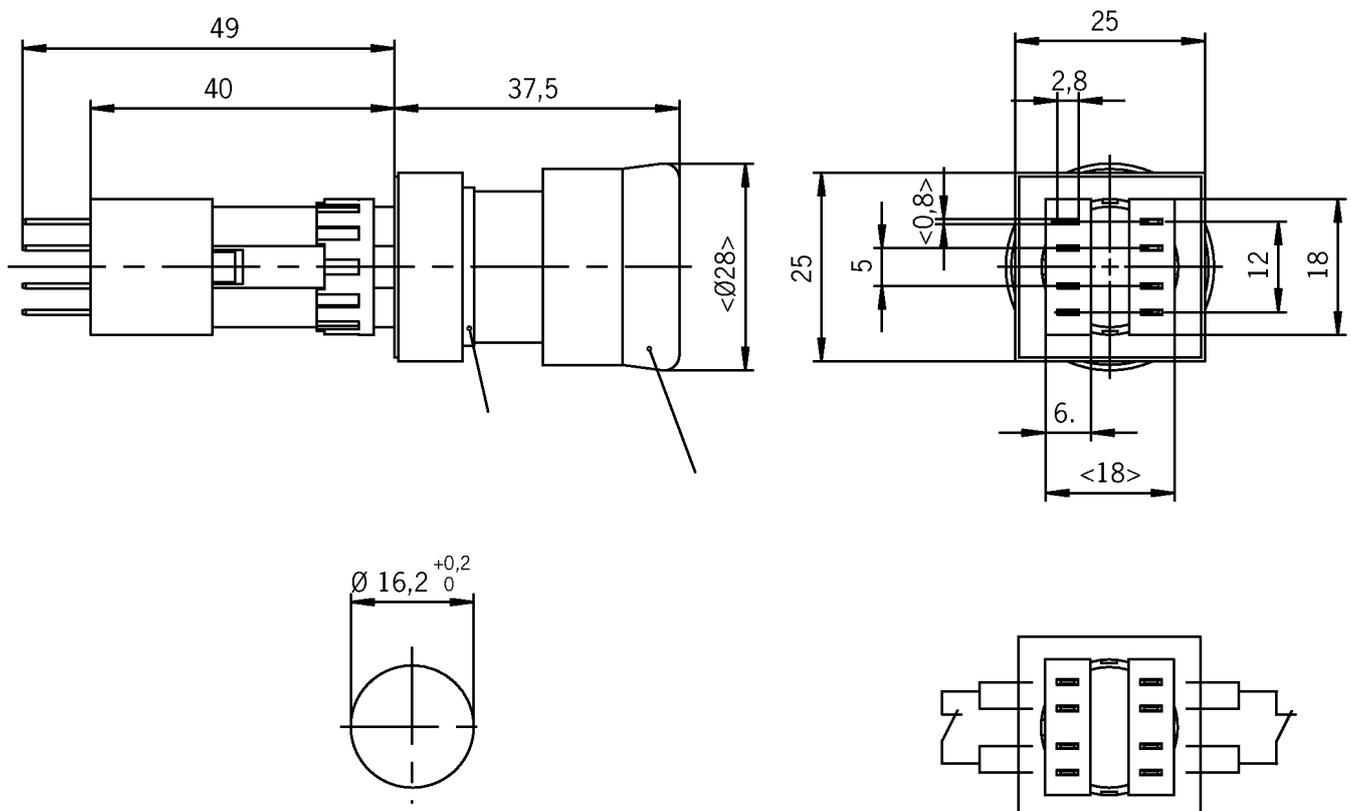

## Technical data

### Electrical connection values

Utilization category	DC-13	3 A 24 V
Switching characteristics	latching, reset by pulling	

### Mechanical values and environment

Number of switching elements	2 one positively driven contact each	
Storage temperature	-25 ... 70 °C	
Mechanical life	0.05 x 10 <sup>6</sup>	
Degree of protection	IP65	

### Miscellaneous

Color		
	Actuating button	red
	Bottom part	yellow

## Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/096298/?#downloads-tab>