


## MGB-L2-APA-AC6A1-S1-L-110501 (Order no. 110501)

### Locking module MGB-L2-APA., (guard locking by solenoid force) with 3 pushbuttons, emergency stop, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850
- ▶ 2 pushbuttons, illuminated (gn, wh)
- ▶ 1 pushbutton, not illuminated (wh)
- ▶ With plug connector RC18
- ▶ Unicode

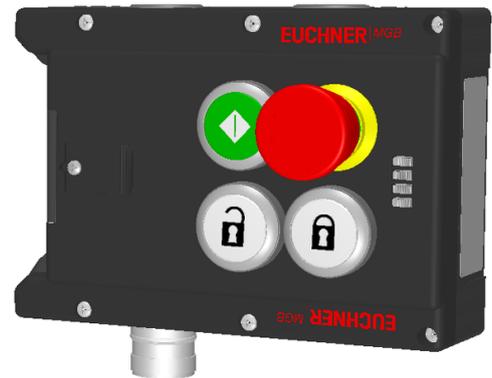

### Guard locking type

MGB- The locking arm is held in the locked position by solenoid force and is unlocked by spring force  
L2... when the solenoid is switched off (open-circuit current principle, electrically locked).

### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

### LED indicator

The LED indicator indicates all important system and status information.

### Monitoring outputs

OT Bolt tongue inserted into the evaluation module

OI Diagnostics; there is a fault

### Emergency stop device

S1 2 positively driven contacts, emergency stop with turn-to-reset, not illuminated


### Pushbuttons

S2 1 NO contact, illuminated


S3 1 NO contact, illuminated

S4 1 NO contact, not illuminated

Dimensional drawings

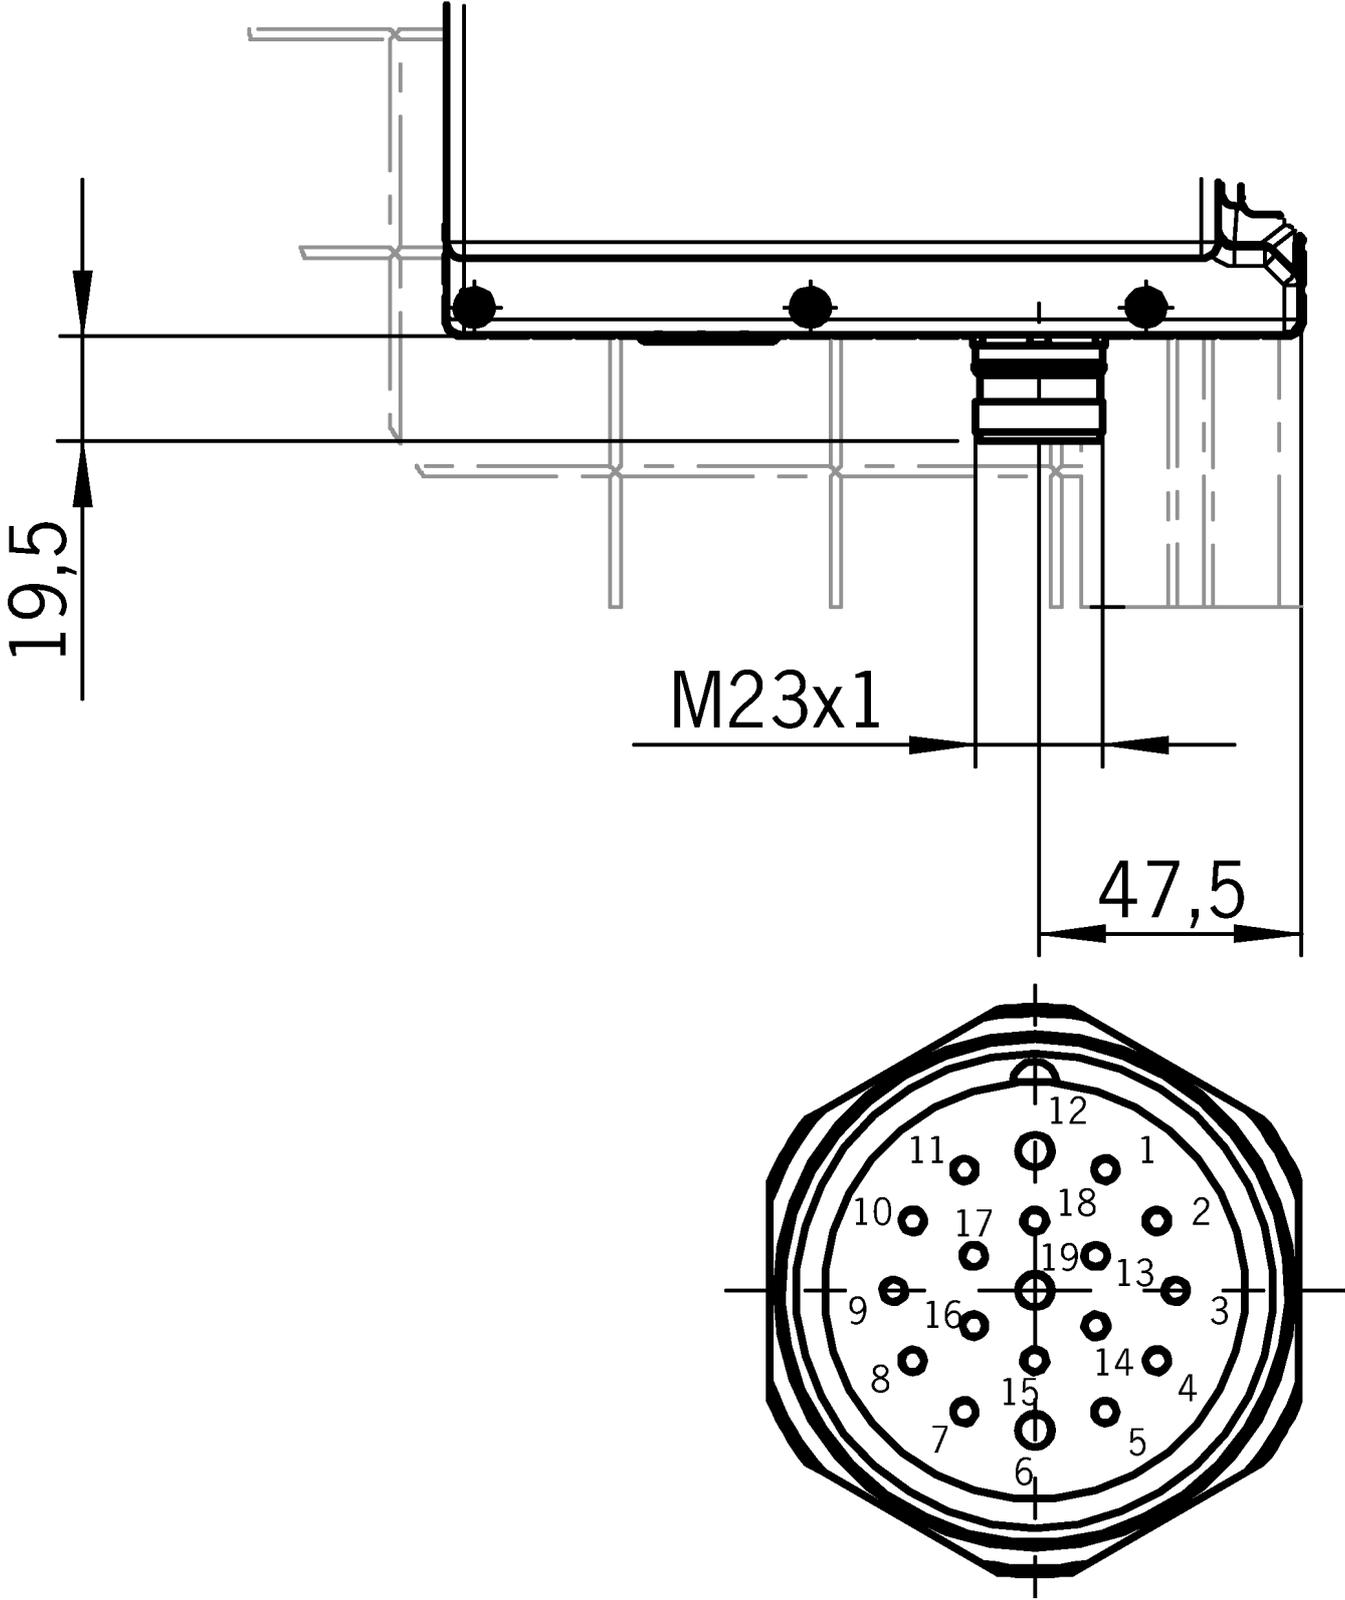

## Dimensional drawings

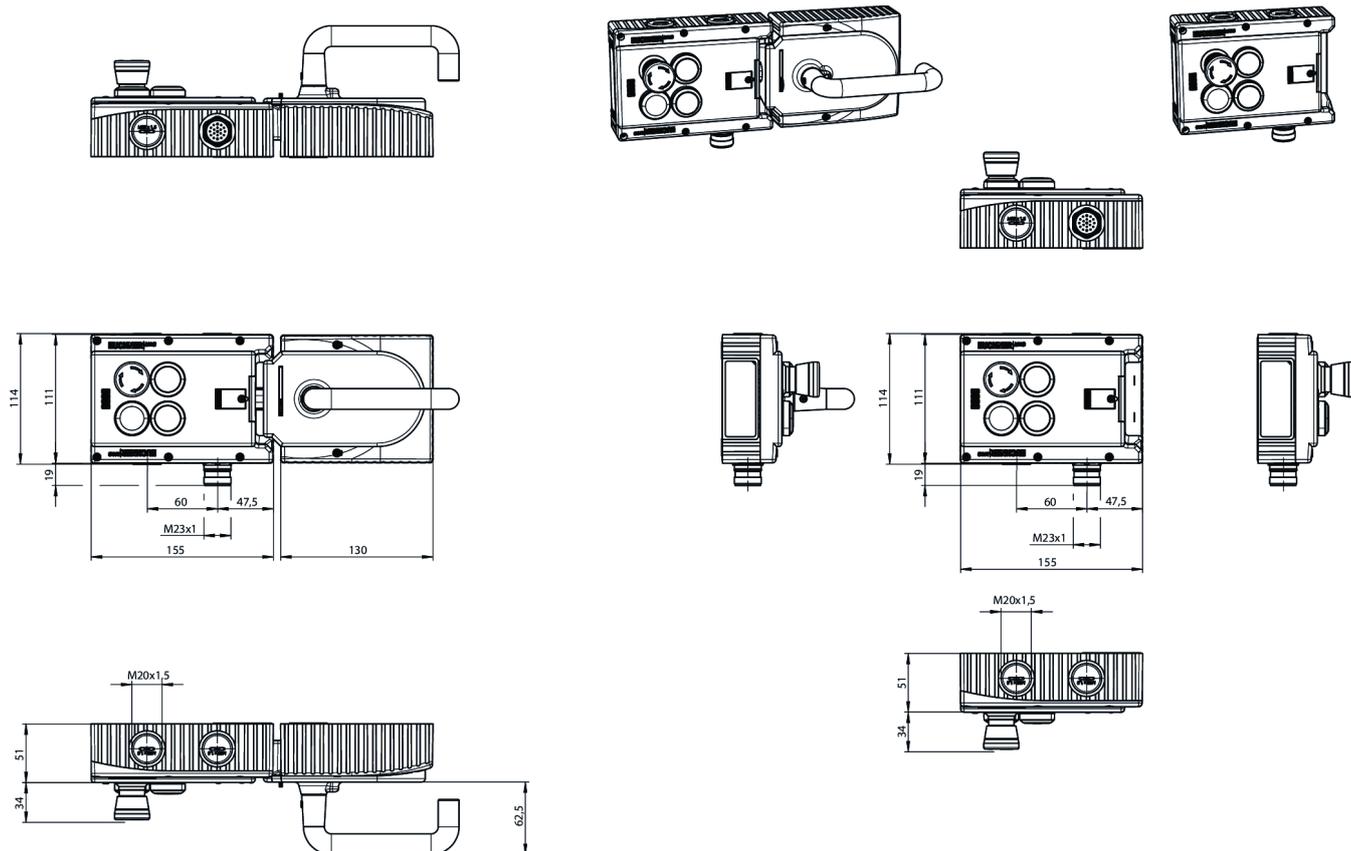

## Connection examples

