


Project : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_  
 Catalogue No. : \_\_\_\_\_  
 Date : \_\_\_\_\_

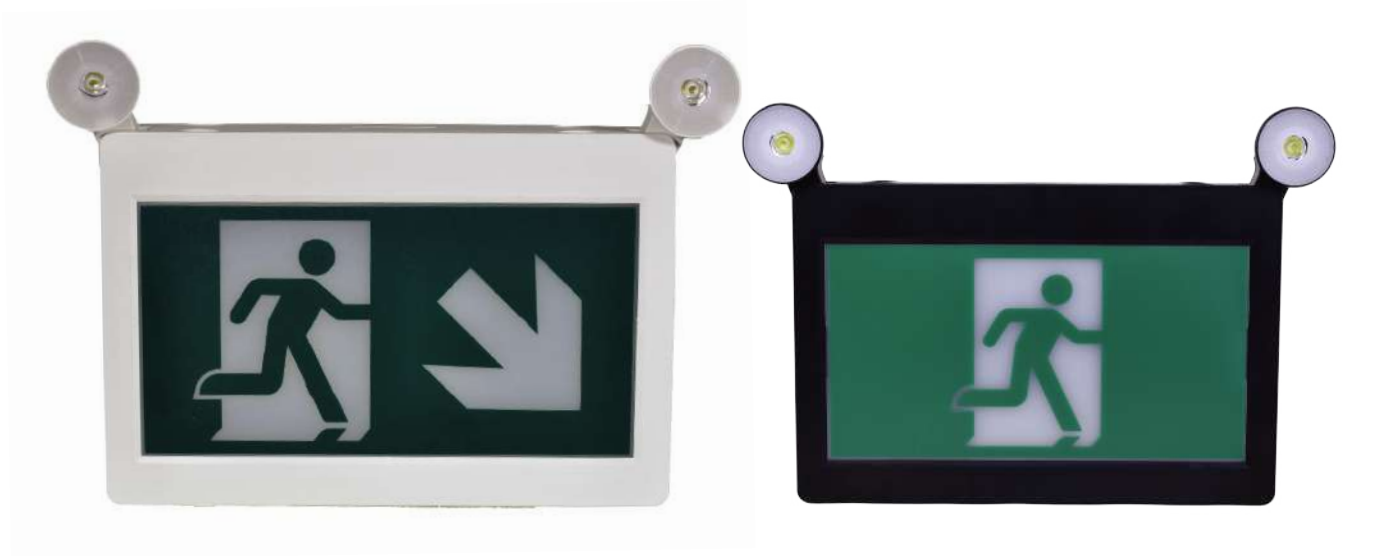

### Specifications

Model No.		<input type="checkbox"/> JRMECW/WH	<input type="checkbox"/> JRMECW/BK
General	Watt	4w	4w
	Lumen	≥140 L	≥140 L
	CCT	6000 k	6000 k
	Volts	AC347/120V	AC347/120V
	CRI	≥65	≥65
	Beam Angel	120degree	120degree
	Hours Rated	5000 hours	5000 hours
	Dimension	13.58"x9.06"x1.97"	13.58"x9.06"x1.97"
Electrical	Operating Frequency	60HZ	60HZ
	Power Factor	>0.5	>0.5
	Operating Temperature	0C° To 40C°	0C° To 40C°
Physical	Lens Material	Plastic	Plastic
	Housing Color	White	Black
	Weight (Lbs)	1.8	1.8
Additional Information	Warranty	5 years	5 years
Compliance	Safety Listing	cULus-Listed	cULus-Listed
	Location Rating	Damp	Damp
	Energy Star	NO	NO
	DLC Approved	NO	NO
	DLC ID	NO	NO

## Features & Specifications

### Construction

- Thermal plastic ABS housing and round shape light head
- High efficiency LED
- Easy replacement pictogram design
- Optional lamp head mounting direction (forward and backward)

### Mounting


- Suitable for wall mounting, ceiling mounting and side mounting
- Type and QTY of pictogram: Running man symbol\*1 pcs;  
Running man with arrow symbol\*2pcs

### Performance Data


- 347/120V AC Dual voltage operation
- 3.6V 1000mAh Ni-cad battery
- Two 1W LED heads
- Diagnostic/pilot LED for AC ON and Charge
- Push button test switch
- Charging time: 24 hours

## Dimensions & Weights


Model No.	JRMECW
Length in.(cm):	13.58 (34.5)
Width in.(cm):	1.97 (5)
Height in.(cm):	9.06(23)
Weight (lbs):	7.6

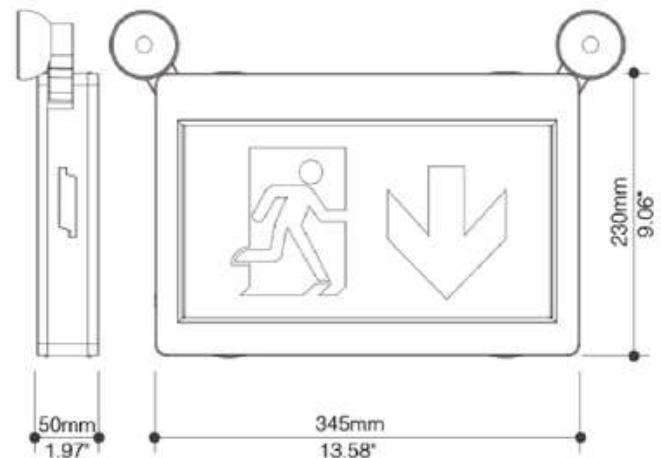

### Product Details

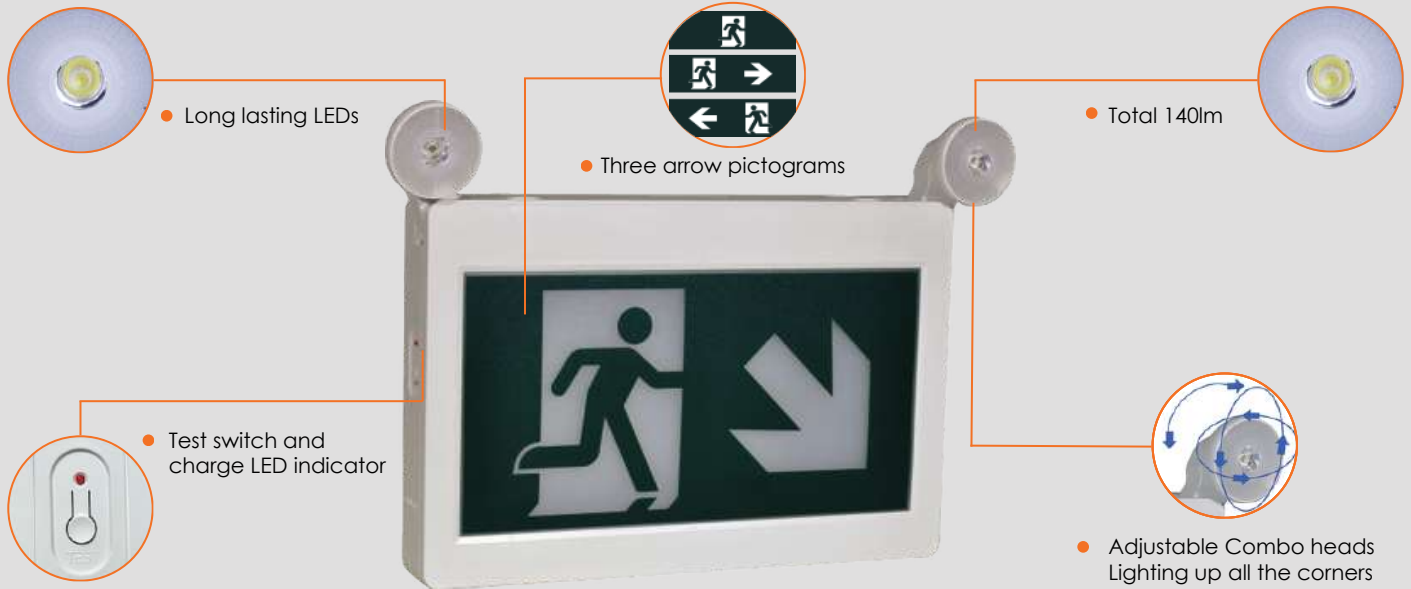

### Accessories (Included)

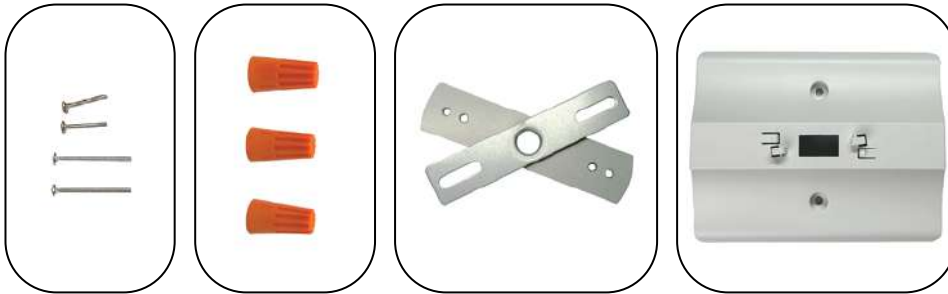

### Rating Table

Model No.	Input Ratings				Emergency output Rating		Emergency Run Time	Recharge Time
	Vac	Hz	Amps (mA)	Watts	Integral	Remote	Minutes	Hours
JRMECW	347/120	60	0.040/ 0.020	4.0	(14) LEDs +(2) 1W LED LAMP ASSEMBLY	NA	120	24



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Votatec customer service representative to confirm inventory levels at time of order

