


## MGB-L1HE-ARA-L-111944 (Order no. 111944)

### Locking set MGB-L1HE-ARA... (guard locking by spring force) without controls or indicators, RC18

- ▶ Guard locking with guard lock monitoring
- ▶ Can be connected in series with other AR devices (e.g. CES-AR and CET-AR)
- ▶ With plug connector RC18
- ▶ With escape release
- ▶ Unicode
- ▶ Release monitoring

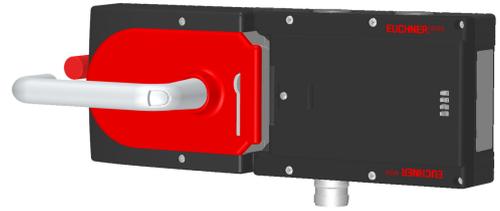

#### Door hinge

A mechanical door stop is permanently integrated into the evaluation module of the MGB. A marking on the stop makes adjustment easier.

#### LED indicator

The LED indicator indicates all important system and status information.

#### Guard locking type

MGB- The locking arm is kept in locked position by spring force and is unlocked by solenoid force  
L1... (closed-circuit current principle).

#### Auxiliary release

For releasing the guard locking, e.g. in case of a power failure.


#### Monitoring outputs

- OT Bolt tongue inserted into the evaluation module
- OL Guard locking solenoid in locked position
- OI Diagnostics; there is a fault


#### Escape release

The escape release enables people accidentally shut in to open the guard locked door from the danger zone.

Dimensional drawings

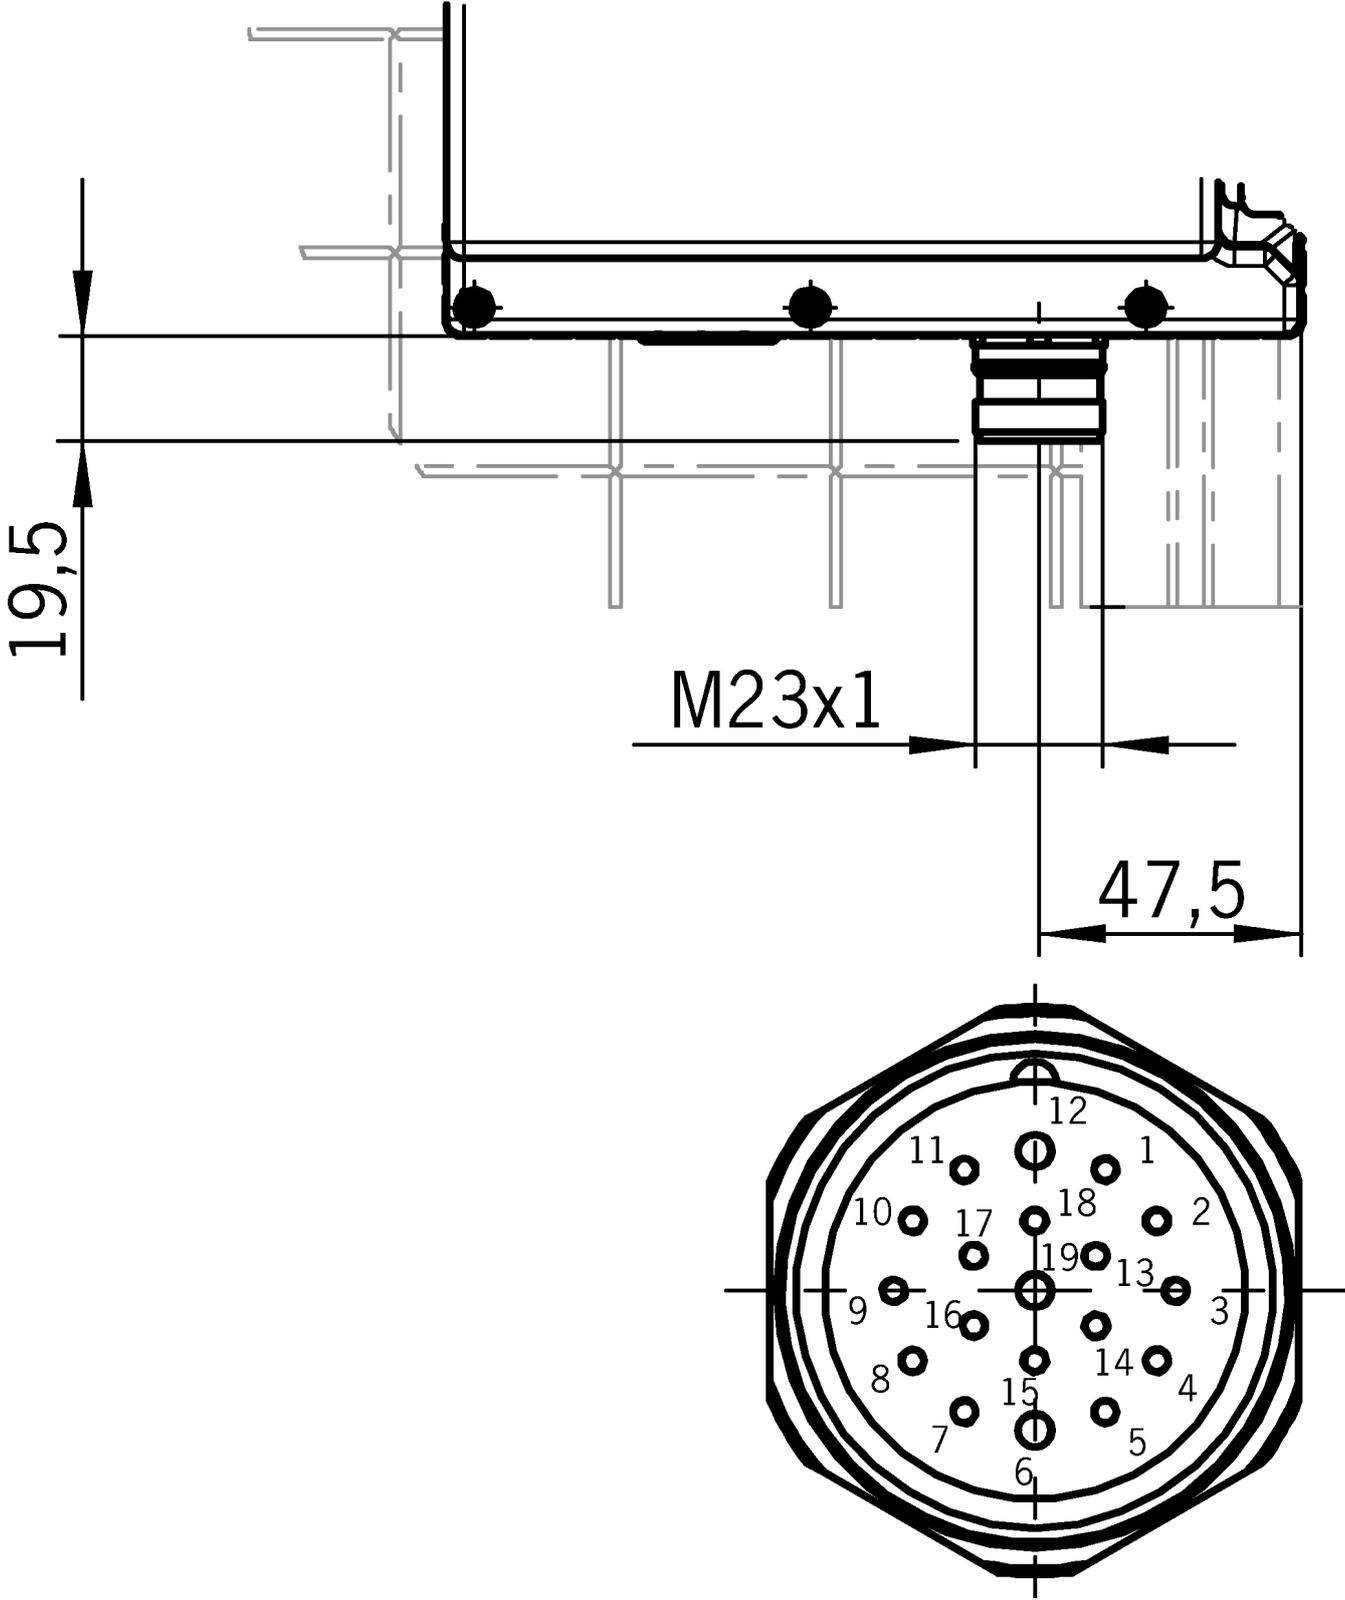

## Dimensional drawings

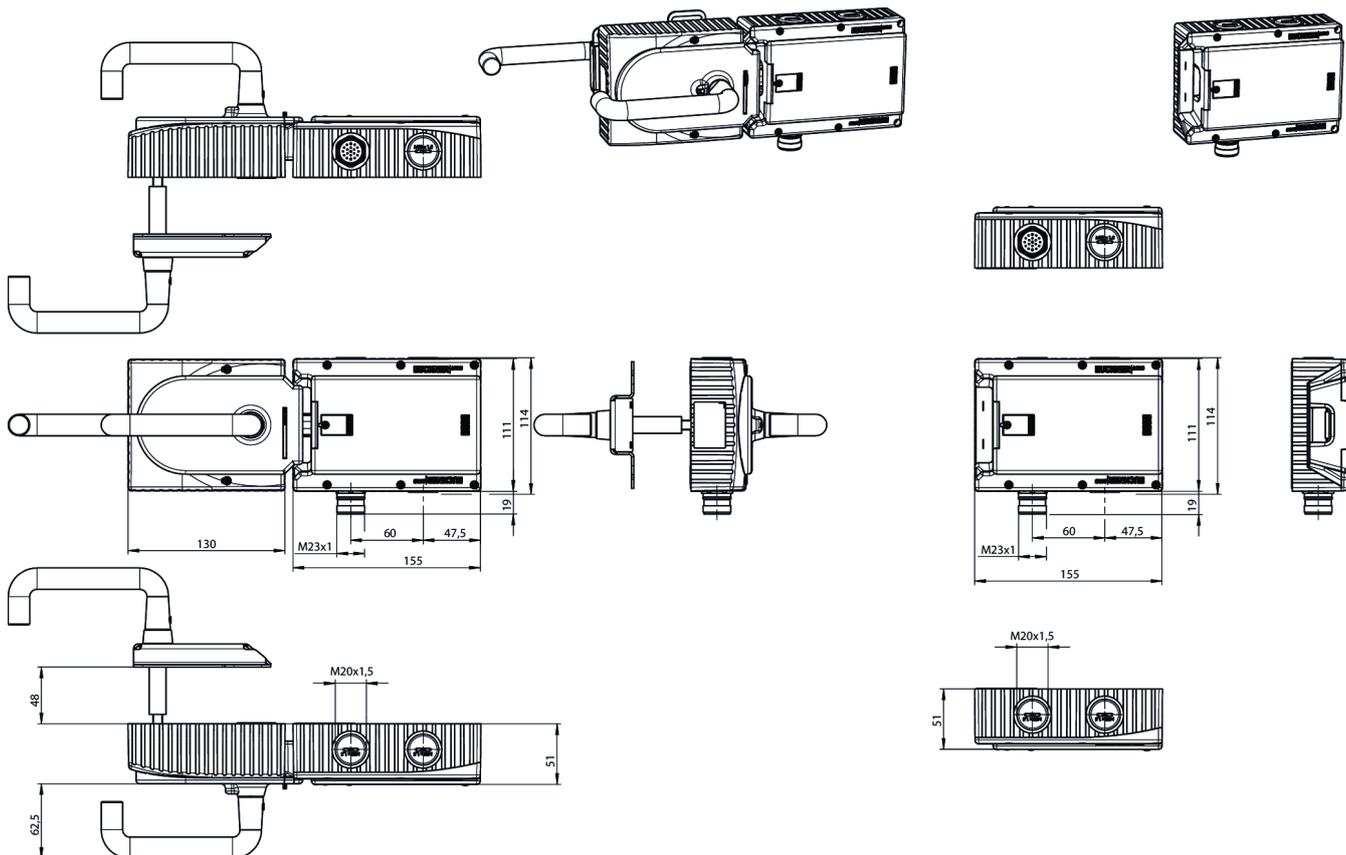

## Connection examples

