

N1AD514AM-M (Order no. 091261)

Single limit switch N1AD, chisel plunger with external diaphragm, cable entry M16x1.5

- ▶ Chisel plunger
- ▶ Housing according to DIN 43693
- ▶ 2 x cable entry M16 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts
- ▶ Exterior diaphragm



Approach direction



Horizontal

Can be adjusted in 90° steps


Exterior diaphragm

Protection against heavy soiling (dust) and aggressive coolants.

Switching element


514 Snap-action switching contact, 1 positively driven contact $\ominus \rightarrow$ + 1 NO contact

Dimensional drawings

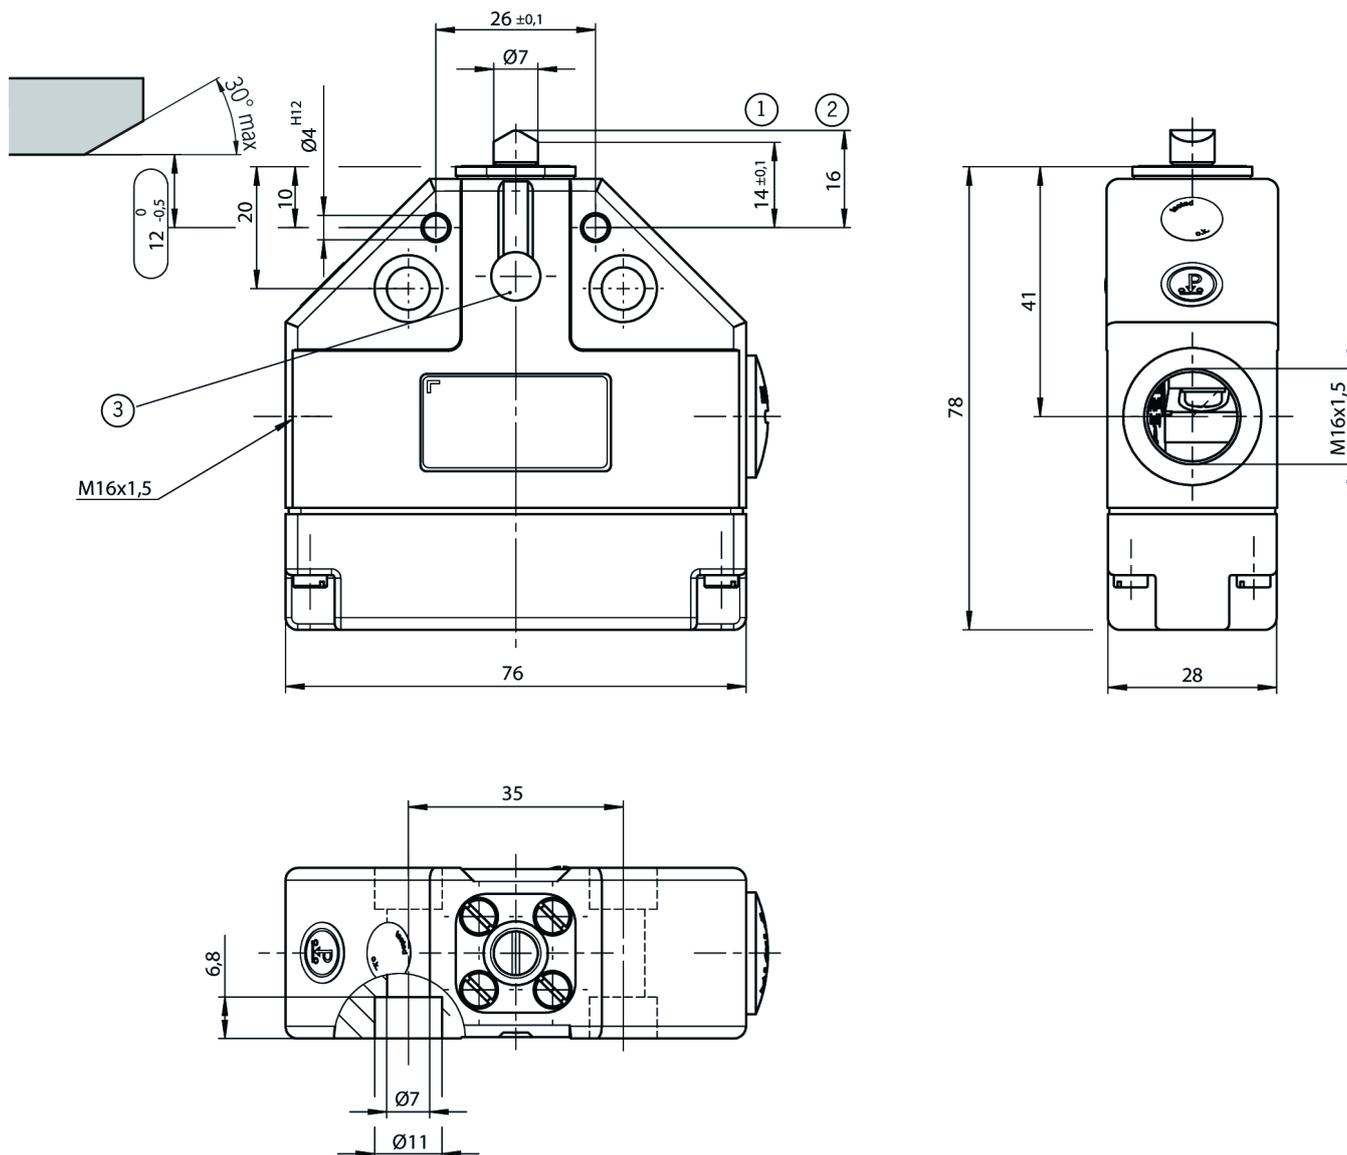


- 1 Operating point
- 2 Free position
- 3 Relief hole sealed

Connection examples

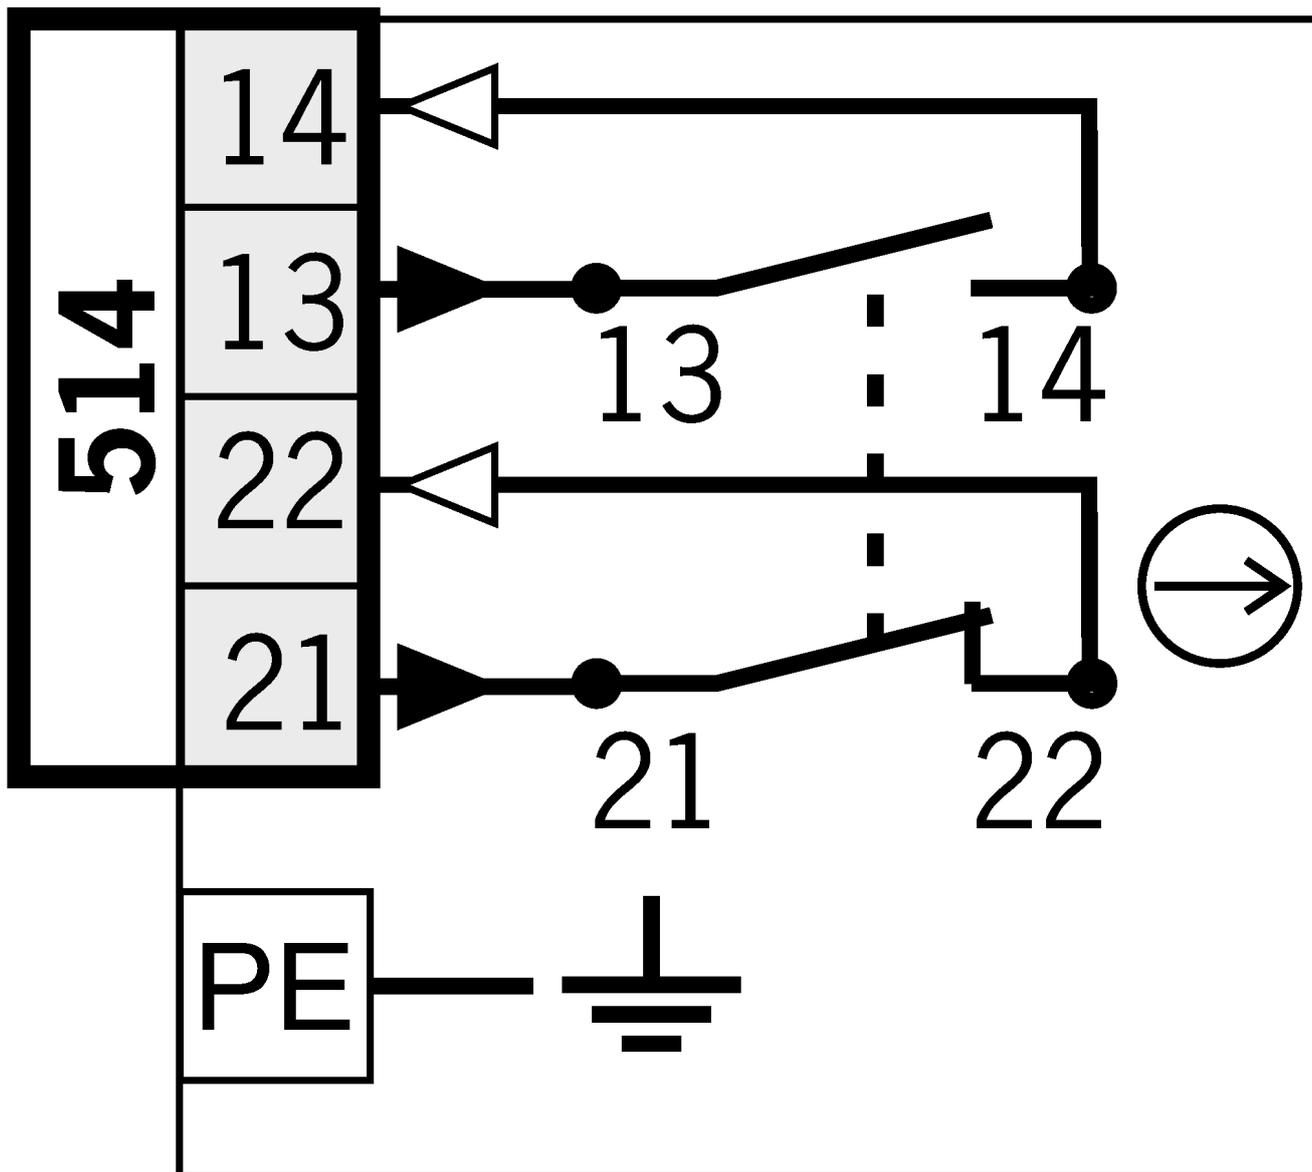

Shift travel diagrams

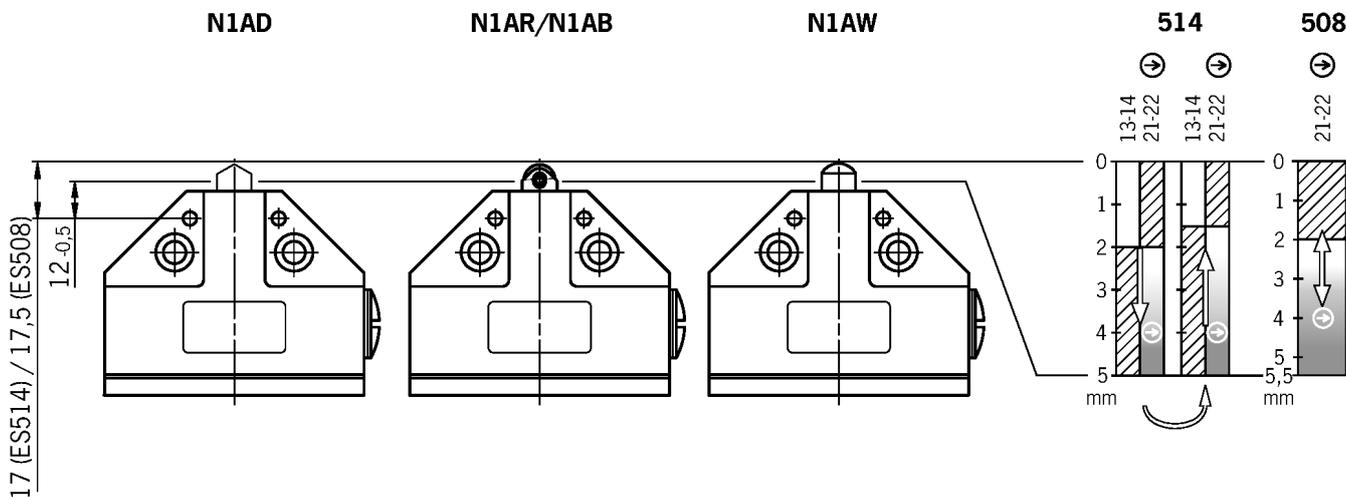

g_Kontakte_geschlossen_sw.eps Contacts closed