

## CES-A-BMB (Order no. 077791)

### Actuator CES-A-BMB


- ▶ Cylindrical design M12 x 0.75



### Insertion tool

With the aid of the insertion tool, the actuator CES-A-BMB (cylindrical design) can be screwed into a prepared M12 x 0.75 thread in the safety door.

### Dimensional drawings

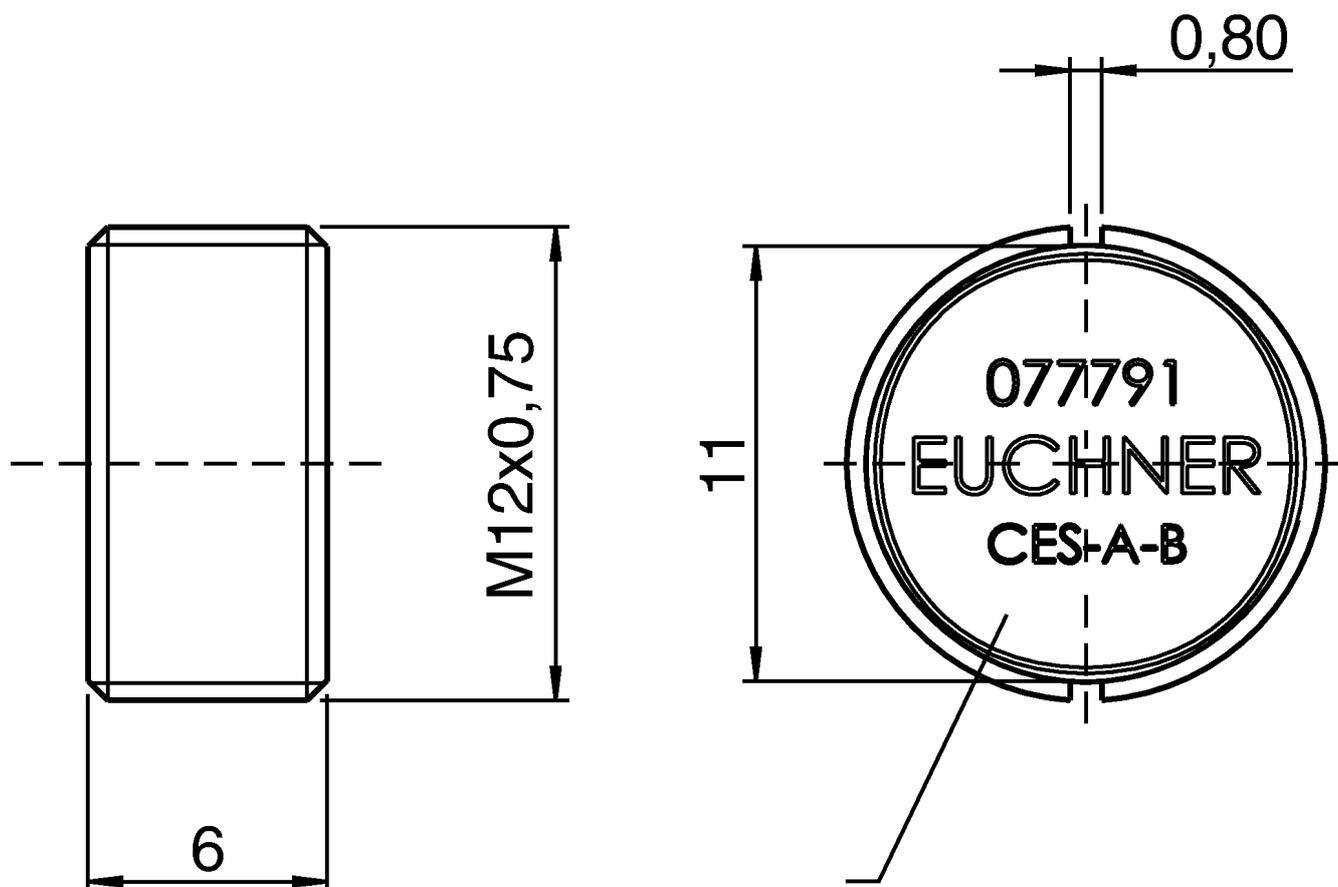

## Technical data

### Approvals



### Electrical connection values

Power supply	Inductive via read head
--------------	-------------------------

### Mechanical values and environment

Storage temperature	-25 ... 85 °C
---------------------	---------------

Mounting type	screws, flush in steel
---------------	------------------------

Degree of protection	IP67/IP69/IP69K
----------------------	-----------------

Ambient pressure	max. 10 bar (applies only if the pressure acts on the actuator from all sides)
------------------	---

Ambient temperature	-25 ... 85 °C
---------------------	---------------

#### Material

Sleeve	stainless steel
Active face	Ceramic (AL2 O3)

## Downloads

All documentation for this material can be found on our website:

<https://www.euchner.de/en-us/a/077791/?#downloads-tab>