


NP1-628AS-M (Order no. 083688)

Safety switch NP, mounting according to DIN EN 50047, cable entry M20 x 1.5

- ▶ Mounting according to DIN EN 50047
- ▶ Cable entry M20 x 1.5
- ▶ 1 pos. driven contact
- ▶ 1 NO contacts



Approach direction

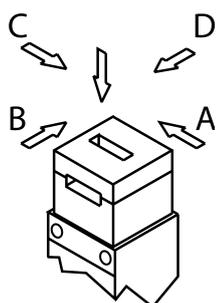

Horizontal and vertical
Can be adjusted in 90° steps


Switching element

628 Slow-action switching contact 1 positively driven contact \ominus + 1 NO contact

Accessories required

Actuator is not included.

Dimensional drawings

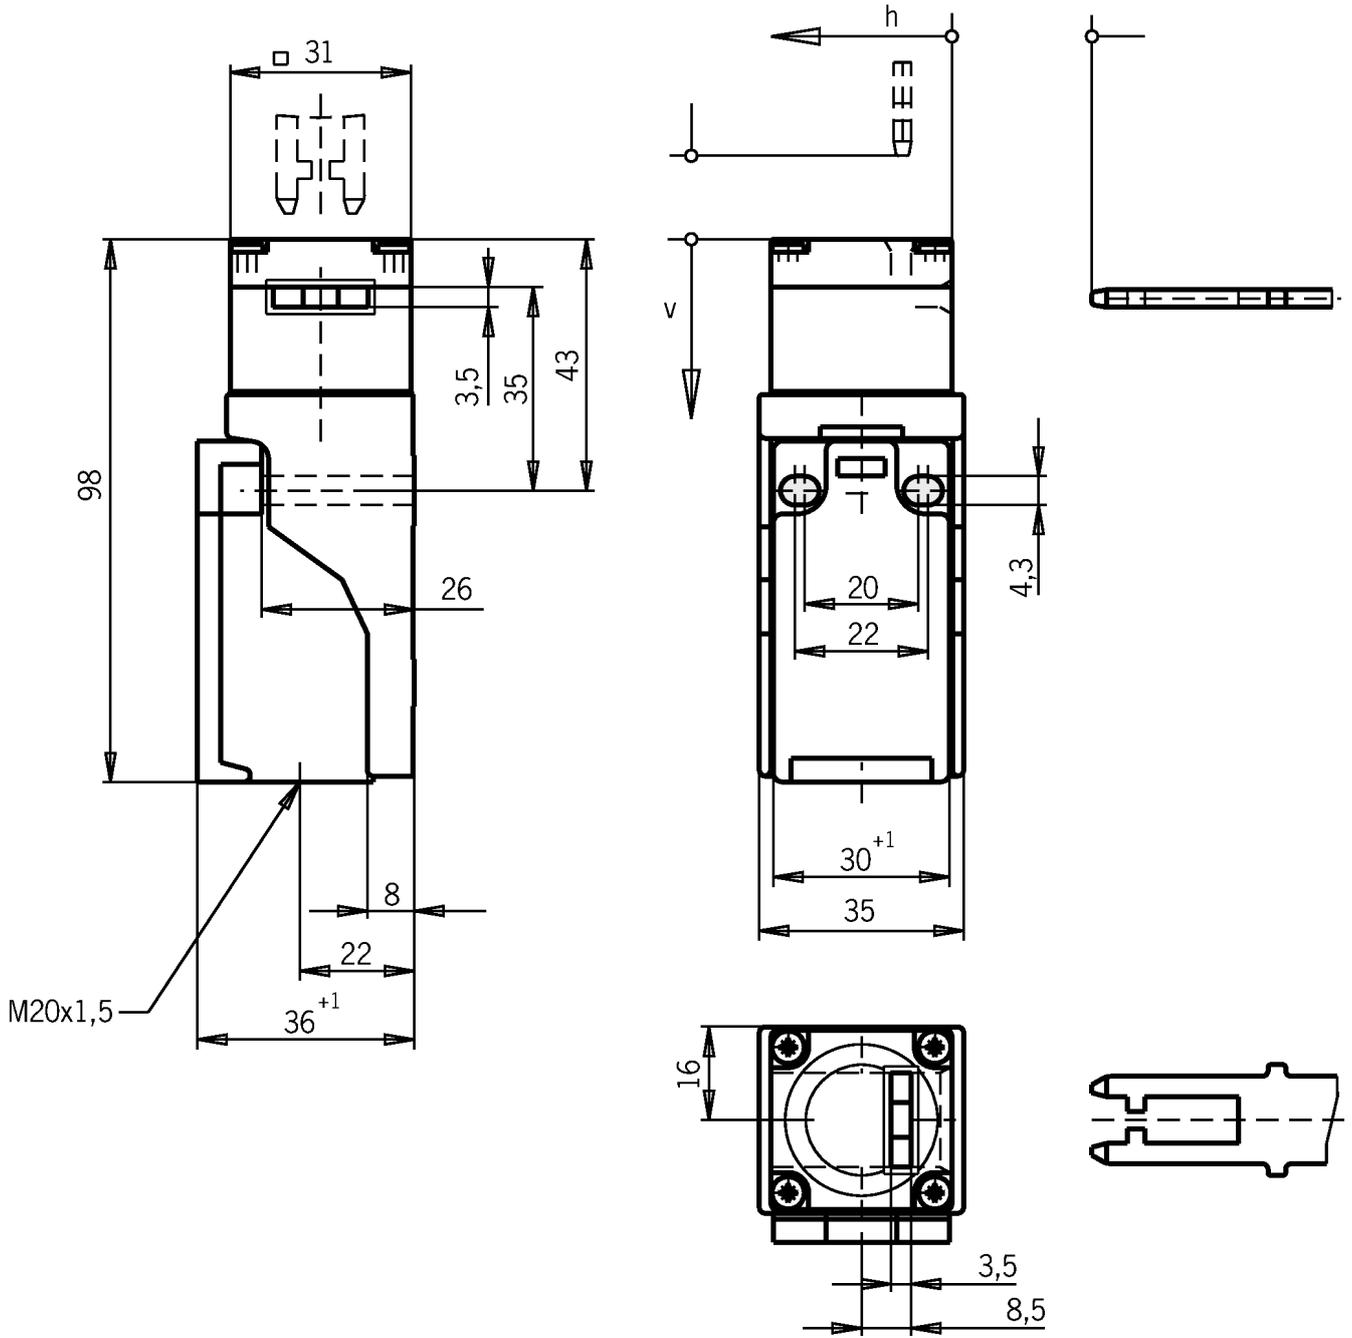

Connection examples

