

BETAETIGER-X-GNQ (Order no. 079741)

Actuator for safety switch NX/TX, increased overtravel

- ▶ Actuator made of stainless steel
- ▶ Two stainless-steel safety screws per actuator
- ▶ With rubber bush



Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 300 mm. Safety screws prevent unscrewing of the actuators.


Actuator with rubber bush

For flexible mounting of the actuator.

Screws made of stainless steel

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimensional drawings

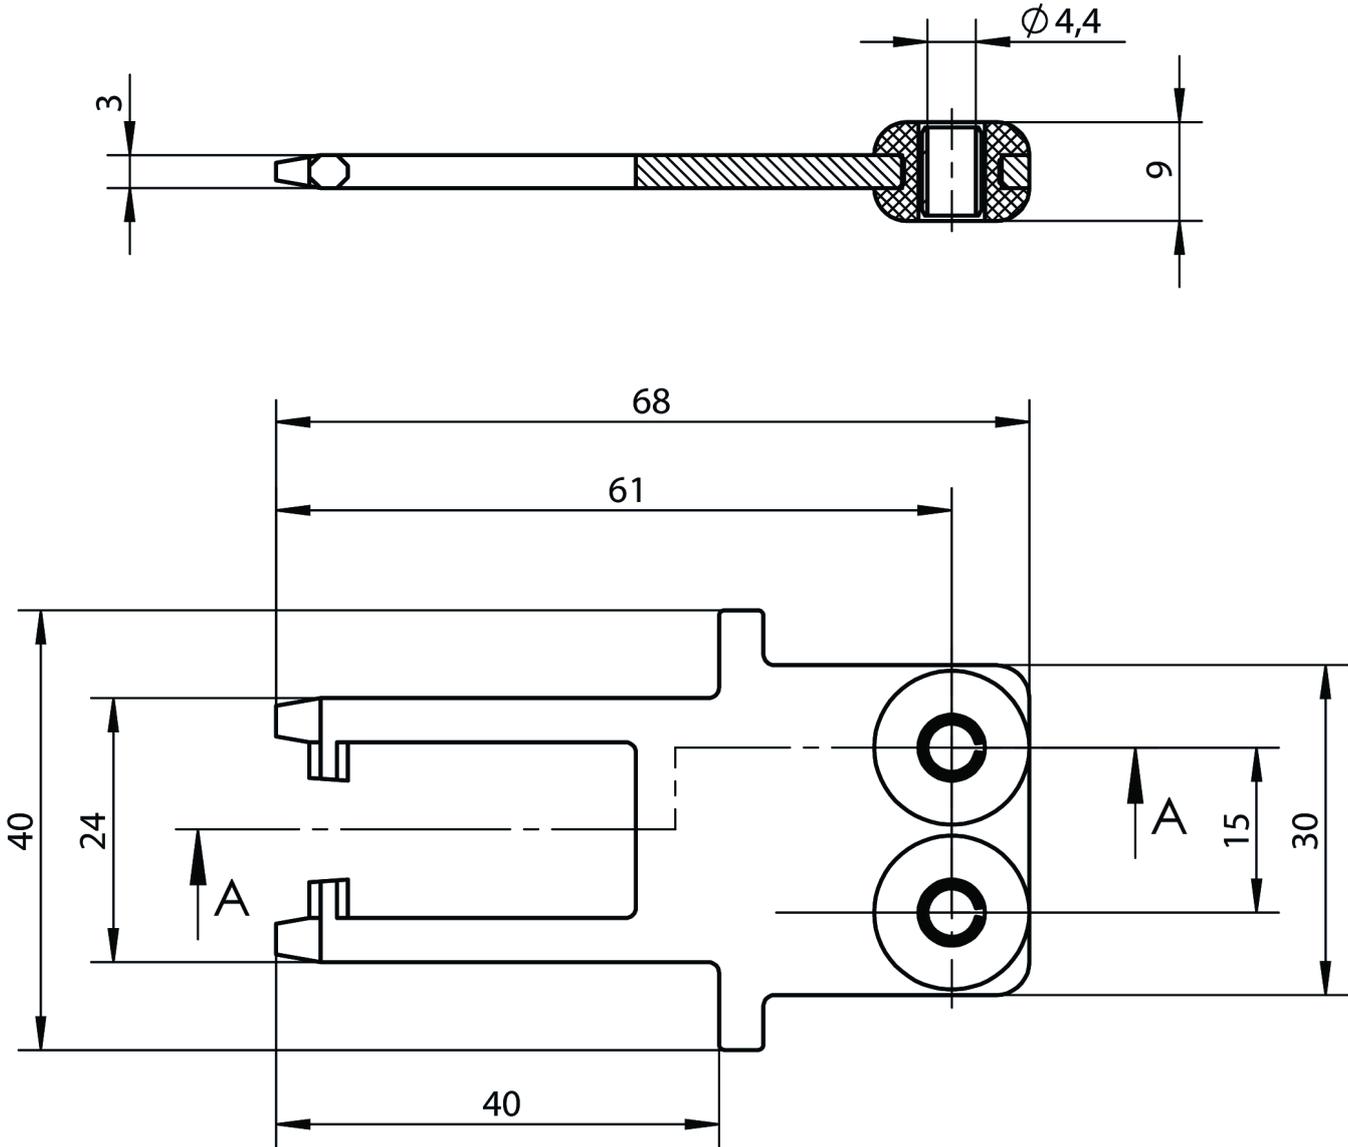

Technical data

Mechanical values and environment

Overtravel	max. 8 mm
Door radius	min. 440 mm
Material	
Actuator	Stainless steel
Rubber bush	NBR
Screw	Stainless steel

Miscellaneous

Usability of insertion funnel	No
-------------------------------	----