

RIEGEL S-C (Order no. 096385)

Bolt for safety switches STA, STP, SGP and SGA

- ▶ Bolt for safety switches STA, STP, SGP and SGA
- ▶ Steel bolt
- ▶ For doors hinged on the left
- ▶ Suitable for a door gap of approx. 15 mm



Scope of delivery

- ▶ Bolt parts
- ▶ Actuator

To be ordered separately:

- ▶ Safety switch


Door types and door hinges

Suitable for hinged and sliding doors. Suitable for doors hinged on the left. With door stop, door cannot be opened inwards.

Integrated lockout bar

With the aid of the integrated lockout bar, the bolt can be secured in the open position, e.g. using padlocks. It is possible to prevent people from being locked in the danger area unintentionally.

Dimensional drawings

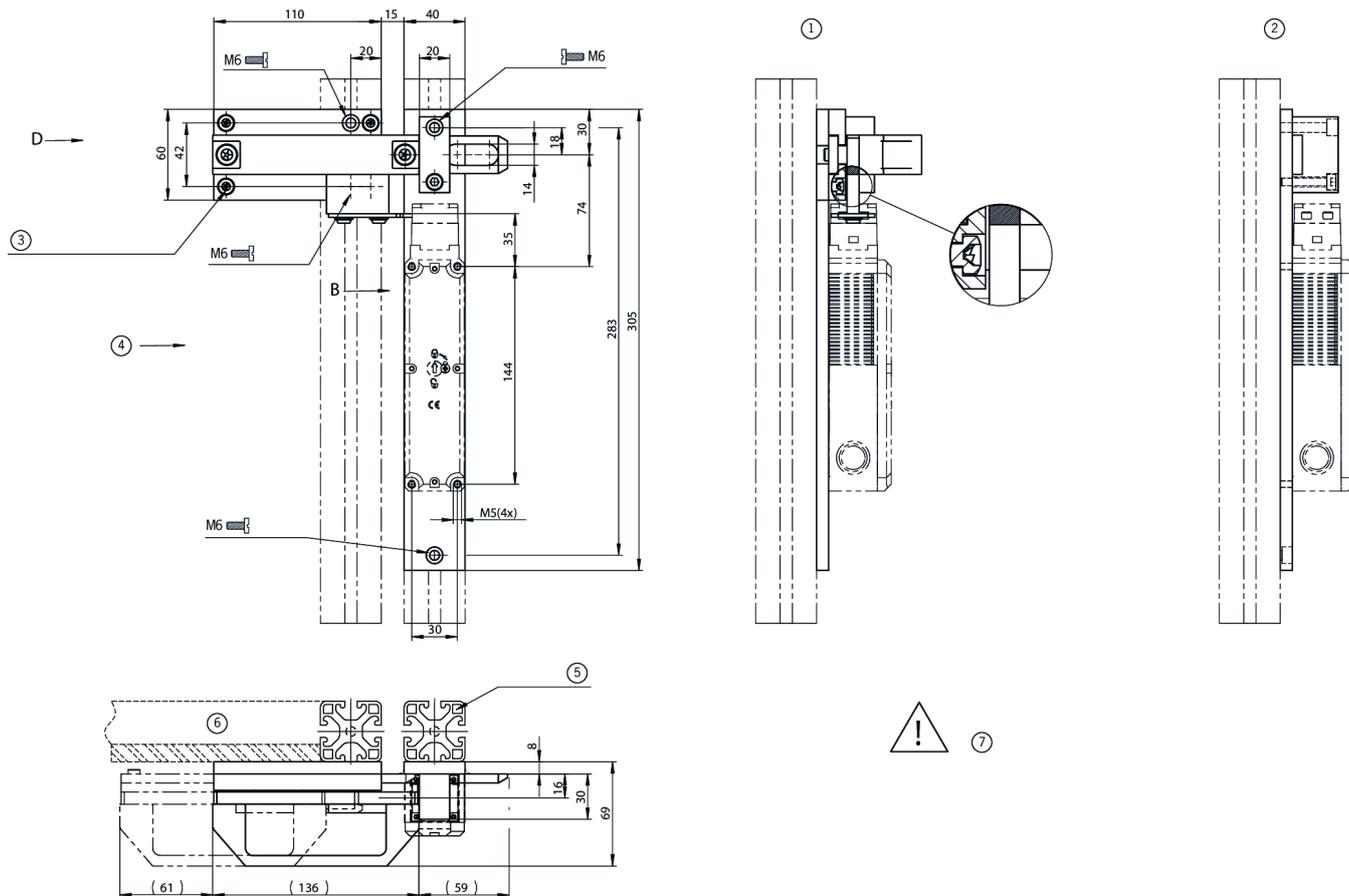

1 View D

2 View B

3 Stop screw locked

4 Safety switch STP, STA, SGP, SGA approach direction C

5 Safety guard frame (40x40)

6 Door hinged on the left

7 Attention! Bolt is not allowed to be used in conjunction with an escape release.

Technical data

Mechanical values and environment

Approach direction	C
Number of safety switches that can be mounted	1
Escape release	None
Storage temperature	-25 ... 70 °C
Material	
Switch bracket	Steel powder-coated
Base plate	Galvanized steel
Guide strips	Plastic
Handle	Plastic

Miscellaneous

Detent mechanism	None
------------------	------